



GALA

DECORACIÓN

PAVIMENTOS Y REVESTIMIENTOS

¡ESTAMOS A TU DISPOSICIÓN!

Calle Antonio Alcaide Sánchez, 1. 29620, Torremolinos, Málaga.

952 37 24 41

infoweb@galadecoracion.com



reddot award 2016
winner

CREATION 70

gerflor.com



Gerflor[®]
theflooringgroup



REGIMENTAL SHERWOOD



Installation	Format/cm	Code
--------------	-----------	------



	18.4x121.9	0808
--	------------	------

CREATION 70

EXCLUSIVE

EDITION



SOLID GLAM SHERWOOD



Installation	Format/cm	Code
--------------	-----------	------



	18.4x121.9	0804
--	------------	------

CERVINO OAK BEIGE



Installation	Format/cm	Code
	23x150	0797



CERVINO OAK NATURE



Installation	Format/cm	Code
	23x150	0798



TOASTED WOOD ROADSTER



Installation	Format/cm	Code
	23x150	0800



TOASTED WOOD CAFE



Installation	Format/cm	Code
	23x150	0799



CREATION 70

EXCLUSIVE EDITION



OXYD PURE



Installation	Format/cm	Code
	45.7x91.4	0088



OXYD IRON



Installation	Format/cm	Code
	45.7x91.4	0089

CREATION 70

FLAMINGO

Installation	Format/cm	Code
	15.2x91.4	0541



WALNUT

Installation	Format/cm	Code
	10.1x91.4	0265
	15.2x91.4	0265



BEDGEBURY OAK

Installation	Format/cm	Code
	15.2x91.4	0338



ELM

Installation	Format/cm	Code
	15.2x91.4	0262



Complementary views on interiordesigner.gerflor.com



GILMORE



Installation	Format/cm	Code
	MIX*	0557



ABERDEEN



Installation	Format/cm	Code
	15.2x91.4	0537



BAUTISTA



Installation	Format/cm	Code
	MIX*	0558



BUXTON OAK



Installation	Format/cm	Code
	15.2x91.4	0340

*Mix: 15.2 x 91.4 cm / 7.6 x 91.4 cm / 22.8 x 91.4 cm

CREATION 70

MUIR OAK



Installation	Format/cm	Code
	10.1x91.4	0258
	15.2x91.4	0258



SERENA



Installation	Format/cm	Code
	15.2x91.4	0545



COBARGO



Installation	Format/cm	Code
	15.2x91.4	0544



ALBION



Installation	Format/cm	Code
	18.4x137.1	0577



Complementary views on interiordesigner.gerflor.com

SORB

Installation	Format/cm	Code
	10.1x91.4	0272
	15.2x91.4	0272



SYCAMORE

Installation	Format/cm	Code
	15.2x91.4	0335



VICTORIA OAK

Installation	Format/cm	Code
	15.2x91.4	0337



CLASSIC OAK

Installation	Format/cm	Code
	15.2x91.4	0260



CREATION 70

SILVERSANDS



Installation	Format/cm	Code
	15.2x91.4	0324



MOON ISLAND



Installation	Format/cm	Code
	15.2x91.4	0358



DOUGLAS



Installation	Format/cm	Code
	15.2x91.4	0535



FAIRVIEW



Installation	Format/cm	Code
	18.4x121.9	0566




Complementary views on interiordesigner.gerflor.com



LIMED OAK

Installation	Format/cm	Code
	15.2x91.4	0329

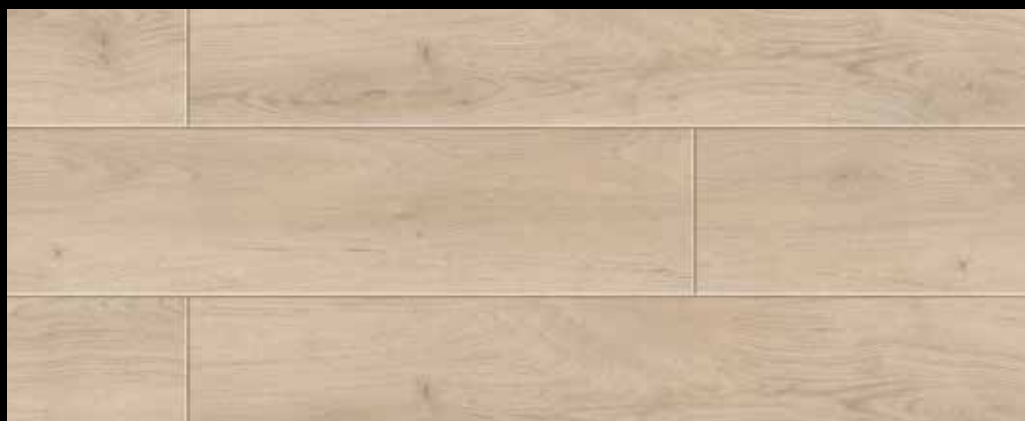

MIDWEST

Installation	Format/cm	Code
	15.2x91.4	0538



DUCHESS

Installation	Format/cm	Code
	15.2x91.4	0547



CREATION 70

DEEP FOREST



Installation	Format/cm	Code
	15.2x91.4	0360



WILD OAK



Installation	Format/cm	Code
	15.2x91.4	0359



CARRINGTON



Installation	Format/cm	Code
	18.4x121.9	0572



COLUMBUS



Installation	Format/cm	Code
	15.2x91.4	0554





BEVERLY



Installation	Format/cm	Code
	15.2x 91.4	0539



TANAMI



Installation	Format/cm	Code
	15.2x 91.4	0552



CLIFTON



Installation	Format/cm	Code
	MIX*	0556



LAWSON



Installation	Format/cm	Code
	18.4x 121.9	0573

*Mix: 15.2 x 91.4 cm / 7.6 x 91.4 cm / 22.8 x 91.4 cm

CREATION 70

WATERLAND		
Installation	Format/cm	Code
	18.4x121.9	0569



FARGO		
Installation	Format/cm	Code
	18.4x121.9	0568



HAMILTON		
Installation	Format/cm	Code
	15.2x91.4	0550



MARUTEA		
Installation	Format/cm	Code
	18.4x121.9	0570





SHERIDAN



Installation	Format/cm	Code
	18.4x121.9	0565



DENIM WOOD



Installation	Format/cm	Code
	15.2x91.4	0356



PORTOBELLO



Installation	Format/cm	Code
	15.2x91.4	0357



SPENCER



Installation	Format/cm	Code
	18.4x137.1	0575

CREATION 70

CALABRIA



Installation	Format/cm	Code
	22.8x91.4	0560



CARASSI



Installation	Format/cm	Code
	22.8x91.4	0561



FIDELIO



Installation	Format/cm	Code
	22.8x91.4	0562



BLACK CREEK



Installation	Format/cm	Code
	15.2x91.4	0540



Complementary views on interiordesigner.gerflor.com



OCEAN SIDE



Installation	Format/cm	Code
	18.4x137,1	0576



MASSERIA



Installation	Format/cm	Code
	18.4x121.9	0564



RED SPIRIT



Installation	Format/cm	Code
	18.4x121.9	0563

CREATION 70



FLAGSTAF



Installation	Format/cm	Code
	61x61	0528



EAST VILLAGE



Installation	Format/cm	Code
	45.7x45.7	0522
	61x61	0522



ATOK



Installation	Format/cm	Code
	45.7x45.7	0525



LEWIS TOWN



Installation	Format/cm	Code
	30.5x61	0512





TRAVERTIN STONE



Installation	Format/cm	Code
	30.5x61	0414



GREENWICH



Installation	Format/cm	Code
	45.7x45.7	0402



WELSH SLATE



Installation	Format/cm	Code
	45.7x45.7	0394



DARK SLATE




Installation	Format/cm	Code
	30.5x61	0114

CREATION 70



BARMA SWEET 

Installation	Format/cm	Code
	On demand <i>Sur demande</i> Auf Anfrage*	

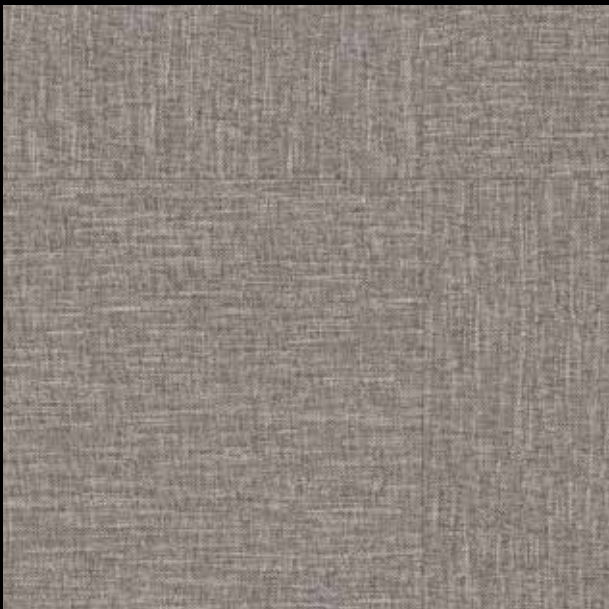

GENTLEMAN TAUPE 

Installation	Format/cm	Code
	On demand <i>Sur demande</i> Auf Anfrage*	



GENTLEMAN GREY 

Installation	Format/cm	Code
	On demand <i>Sur demande</i> Auf Anfrage*	



BARMA MYSTERY 

Installation	Format/cm	Code
	On demand <i>Sur demande</i> Auf Anfrage*	

*Minimum quantity 2100 sqm / *Quantité minimum 2100 m²* / Mindest Menge 2100 m²



DOCK TAUPE

Installation	Format/cm	Code
	45.7x91.4	0087



DOCK GREY

Installation	Format/cm	Code
	45.7x91.4	0085



SOMERSET

Installation	Format/cm	Code
	61x61	0529



HALIFAX

Installation	Format/cm	Code
	61x61	0531

PACKAGING

CONDITIONNEMENT

VERPACKUNGSEINHEITEN

	Format (cm)	m ² / box m ² / boîte m ² / paket	Planks tiles / box Lames Dalles / boîte Fliesen oder planken / paket	Box / pallet Boîtes / palette Pakete / palette	Weight / box (kg) Poids boîte (kg) Bruttogewicht eines paketes (kg)	Pallet size (cm) Dimensions palette (cm) Paletten- masse (cm)	Gross weight of a pallet (kg) Poids brut palette (kg) Brutto-gewicht der palette (kg)	m ² / palett m ² / palette m ² / palette
CREATION 70								
Planks/Lames/Planken	10.1 x 91.4 ⁽¹⁾	3.34	36	72	13.36	128 x 95 x 14	-	240.48
Planks/Lames/Planken	15.2 x 91.4 ⁽¹⁾	3.34	24	77	12.4	124 x 105 x 14	-	257.18
Planks/Lames/Planken	15.2 x 91.4	3.34	24	66	14.86	95 x 100 x 86	1021	220.44
Planks/Lames/Planken	18.4 x 121.9	3.37	15	75	15.35	100 x 124 x 80	1145	252.75
Planks/Lames/Planken	18.4 x 121.9 (REGIMENTAL)	3.14	14	75	13.88	100 x 124 x 73.5	1071	235.50
Planks/Lames/Planken	23 x 150	2.76	8	72	13.71	98 x 153 x 60	1 002	198.72
Planks/Lames/Planken	Mix: 15.2 / 7.6 / 22.8 x 91.4	3.34	24	64	14.86	95 x 95 x 87	1000	213.76
Planks/Lames/Planken	18.4 x 137.1	3.03	12	80	13.7	100 x 140 x 76	1136	242.40
Planks/Lames/Planken	22.8 x 91.4	3.34	16	64	15	95 x 95 x 87	1000	213.76
Planks/Lames/Planken	45.7 x 91.4	3.34	8	64	14.97	95 x 95 x 98	983	213.76
Tiles/Dalles/Fliesen	30.5 x 61 ⁽²⁾	3.72	20	36	15.3	98 x 66 x 87	605	133.92
Tiles/Dalles/Fliesen	61 x 61	3.34	9	48	15.26	130 x 65 x 81	772	160.32
Tiles/Dalles/Fliesen	30.5 x 61	3.34	18	42	15.27	98 x 65 x 80	681	140.28
Tiles/Dalles/Fliesen	45.7 x 45.7	3.34	16	64	15.70	95 x 95 x 86	1045	213.76

Decor Skirting / Plinthe Décor / Dekor-Sockelleiste

5 x 2.4 lm / box • 5 x 2.4 ml / boîte • 5 x 2,4 lfm / paket

(1) Silversands / Classic Oak / Muir Oak / Limed Oak / Elm / Bedgebury Oak / Sorb / Sycamore / Walnut / Buxton Oak / Denim Wood / Victoria Oak / Moon Island / Wild Oak / Portobello / Deep Forest / Douglas / Aberdeen / Serena / Duchess


(2) Slate

The images of floorcoverings in this book have been reproduced as faithfully as printing technology permits.

Les photos et coloris des décors sont imprimés aussi fidèlement que les techniques d'impression le permettent mais ne sont pas contractuels.

HINWEIS: Mit Druck dieser Broschüre werden alle vorherigen Versionen ungültig. Alle Angaben und Hinweise in dieser Broschüre entsprechen unserem Kenntnisstand zum Zeitpunkt der Drucklegung. Im Einzelfall kann für deren Vollständigkeit, Richtigkeit und Anwendbarkeit keine Gewähr übernommen werden. Geringe Farbabweichungen bei den Produktabbildungen vom Original-Farbtönen sind möglich und drucktechnisch bedingt.


AUTHENTIC

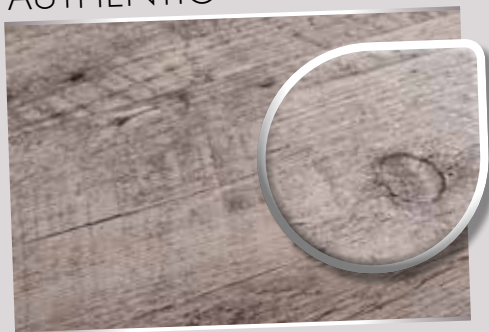

SAW EFFECT



RAW

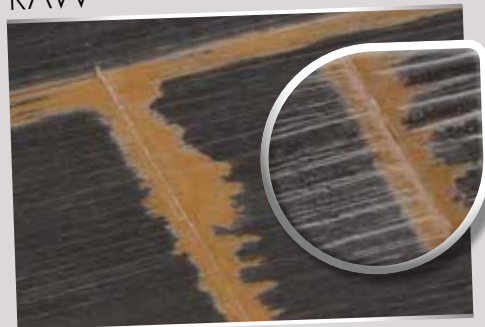

TEXTILE



CREATION 70



	Code	Slip Resistance wet / Glissance humide / Rutschhemmung (DIN 51130) Embosses / Grains / Prägungen
CLASSIC OAK	0260	R9 - NATURAL
DEEP FOREST	0360	R10 - BRUSHED
DENIM WOOD	0356	R9 - SAW EFFECT
DOCK GREY	0085	R10 - HAMMERED
DOCK TAUPE	0087	R10 - HAMMERED
HALIFAX	0531	R9 - STONE
MIDWEST	0538	R9 - NATURAL
MOON ISLAND	0358	R10 - BRUSHED
PORTOBELLO	0357	R10 - BRUSHED
SOMERSET	0529	R11 - PERFORATED
WALNUT	0265	R9 - NATURAL
ALBION	0577	R9 - NATURAL
EAST VILLAGE	0522	R9 - STONE
ELM	0262	R9 - NATURAL
FARGO	0568	R9 - SAW EFFECT
FLAGSTAF	0528	R9 - STONE
FLAMINGO	0541	R9 - NATURAL
MUIR OAK	0258	R9 - NATURAL
OCEAN SIDE	0576	R9 - SAW EFFECT
SERENA	0545	R9 - NATURAL
SHERIDAN	0565	R10 - AUTHENTIC
SILVERSANDS	0324	R9 - NATURAL
SORB	0272	R9 - NATURAL
SYCAMORE	0335	R9 - NATURAL
TRAVERTIN STONE	0414	R9 - SAND
VICTORIA OAK	0337	R9 - NATURAL
WELSH SLATE	0394	R10 - SLATE
WILD OAK	0359	R10 - BRUSHED
ABERDEEN	0537	R10 - BRUSHED
ATOK	0525	R9 - STONE
BAUTISTA	0558	R9 - SAW EFFECT
BEDGEBURY OAK	0338	R9 - NATURAL
BEVERLY	0539	R10 - BRUSHED
BLACK CREEK	0540	R10 - BRUSHED
BUXTON OAK	0340	R9 - NATURAL
CALABRIA	0560	R9 - SAW EFFECT
CARASSI	0561	R10 - RIB WOOD
CARRINGTON	0572	R10 - RUSTIC WOOD
CERVINO OAK BEIGE	0797	R9 - NATURAL
CERVINO OAK NATURE	0798	R9 - NATURAL
CLIFTON	0556	R9 - NATURAL
COBARGO	0544	R9 - NATURAL
COLOMBUS	0554	R9 - SAW EFFECT
DARK SLATE	0114	R10 - NATURAL
DOUGLAS	0535	R10 - BRUSHED
DUCHESS	0547	R9 - NATURAL
FAIRVIEW	0566	R9 - SAW EFFECT
FIDELIO	0562	R10 - RIB WOOD
GILMORE	0557	R9 - NATURAL
GREENWICH	0402	R10 - HAMMERED
HAMILTON	0550	R10 - BRUSHED
LAWSON	0573	R9 - SAW EFFECT
LEWIS TOWN	0512	R9 - STONE
LIMED OAK	0329	R9 - NATURAL
MARUTEA	0570	R9 - SAW EFFECT
MASSERIA	0564	R10 - RAW
OXYD PURE	0088	R11 - PERFORATED
OXYD IRON	0089	R11 - PERFORATED
RED SPIRIT	0563	R10 - RAW
REGIMENTAL NAVY BLUE	0805	R9 - NATURAL
REGIMENTAL PICADILLY	0807	R9 - NATURAL
REGIMENTAL SHERWOOD	0808	R9 - NATURAL
SOLID GLAM NAVY BLUE	0801	R9 - NATURAL
SOLID GLAM PICADILLY	0803	R9 - NATURAL
SOLID GLAM SHERWOOD	0804	R9 - NATURAL
SPENCER	0575	R9 - NATURAL
TANAMI	0552	R9 - LIGHT
TOASTED WOOD CAFE	0799	R9 - NATURAL
TOASTED WOOD ROADSTER	0800	R9 - NATURAL
WATERLAND	0569	R9 - SAW EFFECT
BARMA MYSTERY	0023	TBC
BARMA SWEET	0021	TBC
GENTLEMEN GREY	0088	TBC
GENTLEMEN TAUPE	0089	TBC



* information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

	CREATION 70			
	CREATION 70 Design	CREATION 70 Slate	CREATION 70 ^[3]	

DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE / BESKRIVNING / BESKRIVELSE

Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Essatura total / Spessore totale / Total tjocklek / Total tykkelse	EN ISO 24346 [EN 428]	mm	2.50	2.40	2.50
	ASTM F386	inch	0.1	0.09	0.1
Thickness of the wearlayer / Dicke der Nutzschicht / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Essatura camada de desgaste / Spessore strato di usura / Sliitskiikt tjocklek / Tykkelse slitesjikt	EN ISO 24340 [EN 429]	mm	0.70	2.40	0.70
	ASTM F410	inch	0.03	0.09	0.03
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Vikt / Vekt	EN ISO 23997 [EN 430]	g/m ²	4100	3400	3960

Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensione / Storlek / Størrelse	EN ISO 24342 [EN 427]	mm	457x914 / 457x457 610x610 / 305x610 184x1371 / 184x1219 152x914 / 228x914 / 230x1500 Creation Mix: 152x914 / 228x914 / 76x914	305x610	152.4x914.4 101.6x914.4
	ASTM F 536	inch	18"x36" / 18"x18" / 24"x24" / 12"x24" / 7.25"x54" / 7.25"x48" / 6"x36" / 9"x36" Creation Mix: 6"x36" / 9"x36" / 3"x36"	12"x24"	6"x36" 3.7"x36"

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI / KLASSIFICERING / KLASSISERING

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme/Spécification produit / Normas / Normas / Norma prodotto / Norm/Produktspekifikation / Norm	-	-	EN ISO 10582 [EN 649]	EN ISO 10581 [EN 649]	EN ISO 10582 [EN 649]
	ASTM F 1700	-	Class III Type B	Class III Type B	Class III Type B
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea / Europaklass / Europaklasse	EN ISO 10874 [EN 685]	classe/ class	34-43	34-43	34-43
Classement UPEC	NF 189	-	U4P3E2C2	-	U4P3E2C2
Certification NF UPEC	-	-	783/356-001.1	-	302-001.1
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco / Brandklassificering / Brannklassifisering	EN 13 501-1	classe/ class	Bfl-s1	Bfl-s1	Bfl-s1
Static Electrical Propensity / Begehuafadung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica / Elektrisk oppladning / Elektrostatisk oppladning	EN 1815	kV	< 2	< 2	< 2
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida(1) / Friktion / Friksjon, våt	DIN 51 130	classe/ class	R9-R10-R11*		

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE / TESTVÄRDEN / TESTVERDIER

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione / Sliitagemotstånd / Sliitestykke	EN 660.2	mm ³	≤ 2.0	≤ 4.0	≤ 2.0
Wear Group / Verschleißgruppe / Groep slijtvastheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione / Sliitklass / Sliitestykkegruppe	[EN 649]	-	T	P	T
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante / Bindemedelsinnehåll / Bindemiddel innhold	EN ISO 10582	Type	I	-	I
	EN ISO 10581	Type	-	I	-
Dimensional Stability / Maßstabilität / Maatvastheid / Stabilité dimensionnelle / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale / Dimensionsstabilitet / Dimensjonsstabilitet	EN ISO 23999 [EN 434]	%	≤ 0.15	≤ 0.25	≤ 0.15
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçamento / Imprinta / Intrykksbestandighet / Intrykksfasthet	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.10	≤ 0.10
Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico / Stegljudsdämpning / Trinnylstdemping	EN ISO 717-2	dB	4	4	4
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar / Trumljud / Romlyd	NF S 31074	dB	76	76	76
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed / Tålighet mot rullande stolshjul / Rullende stolshjul (Type W)	ISO 4918 [EN 425]	-	OK	OK	OK
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Varmedledningsmotstånd / Varmemotstand	EN ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25	0.25
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce / Färgbeständighet / Färgbestandighet	EN 20 105 - B02	degré / degree	≥ 6	≥ 6	≥ 6
Surface Treatment / Oberflächenvergütung / Öppervlaktebehandling / Traitement de surface / Tratamiento de superficie / Tratamento de superficie / Ytbehandling / Överlatsbehandling	-	-	PUR+	PUR+	PUR+
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestendigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici / Kemikaliebestandighet / Kjemikaliebestandighet (2)	EN ISO 26987 [EN 423]	-	OK	OK	OK

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITE DE L'AIR INTERIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR / INNHOMSLUFT / EMISJONER

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m ³	< 100	< 100	< 100
Certification / Zeugnis / Certificado / Certificação	-	-	-	-	Floorscore®

CE MARKING / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA / CE-MÄRKNING / CE MARKING

CE	EN 14041	-	  
		-	

[1] Ramp test with oil / Schiefe Ebene / Plan incliné avec huile - [2] Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung

[3] Silversands / Classic Oak / Muir Oak / Lined Oak / Elm / Bedgebury Oak / Sorb / Sycamore / Walnut / Buxton Oak

* Slip Resistance Wet / Rutschhemmung / Glissance humide : details on web site gerflor.com / einzelheiten auf der Web-site gerflor.com / détails sur le site internet gerflor.com

FRANCE: Gerflor Service Express

 **0 810 569 569**  **0 810 569 570**
PRIX APPEL LOCAL PRIX APPEL LOCAL

e-mail: contactfrance@gerflor.com

OTHER COUNTRIES: Gerflor International

Tel: +33 [0]4 74 05 40 00 - Fax: +33 [0]4 74 05 03 13 - e-mail: gerflorcontract@gerflor.com

Gerflor
theflooringgroup



MIPOLAM CLASSIC

gerflor.com



Gerflor®
theflooringgroup

MIPOLAM CLASSIC



2 m



608 x 608 mm



Abrasion group
2 mm



Medium to heavy traffic



PUR
TREATED



0125 Truffle
NCS: 6005-Y50R / LRV: 17.5



0124 Tortora
NCS: 3010-Y20R / LRV: 36.9



0014 Brown
NCS: 3010-Y40R / LRV: 39.2



0301 Beige
NCS: 1505-Y30R / NCS: 65.5



0003 Ivory
NCS: 2010-Y30R / LRV: 56.1



0006 Honey
NCS: 2020-Y30R / LRV: 46.0



All colours available as 300 x 300mm tiles upon request for a minimum order quantity of 500 sqm - ▲ Thickness: 1.5 mm - Sheet format only



0123 Corallo
NCS: 2060-Y80R / LRV: 21.2



0013 Pewter
NCS: 6502-B / LRV: 18.2



0005 Steel
NCS: 3502-B / LRV: 38.3



0108 Pepper
NCS: 2500-N / LRV: 49.1



0303 Grey
NCS: 3005-B20G / LRV: 42.2



0002 Platinum
NCS: 2002-B / LRV: 56.1





0127 Bermuda
NCS: 5030-B10G / LRV: 13.4



0126 Nordica
NCS: 2040-B / LRV: 34.2



0010 Azure
NCS: 3030-B / LRV: 32.6



0120 Borneo
NCS: 4020-G40Y / LRV: 27.5



0122 Pineapple
NCS: 1050-Y20R / LRV: 51.8



0121 Green Leaf
NCS: 2040-G60Y / LRV: 41.1



MIPOLAM CLASSIC

Performances and benefits



Homogeneous vinyl flooring suitable for medium to heavy duty traffic areas



Directional design available in 18 references



2 mm thickness



Flexible, easy to install and to weld

Maintenance



Ease of maintenance, no immediate use of an acrylic emulsion after installation

Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Entrance mats



Skirtings & Profiles

EASIER MAINTENANCE - LOWER ENVIRONMENTAL IMPACT



100 % RECYCLABLE

- 100 % recyclable product



RECYCLED CONTENT

- 25 % recycled content
- 100 % REACH compliant recycled content



INDOOR AIR QUALITY

- TVOC emissions 100 times below standards (TVOC < 10 µg/m³ after 28 days)
- Comply with AgBB protocol
- No formaldehyde emission



LCA

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)



COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



WELLNESS

Health

- Walking Comfort: B Class

			MIPOLAM CLASSIC 1.5 mm	MIPOLAM CLASSIC 2 mm
DESCRIPTION				
Total Thickness	EN ISO 24346 (EN 428)	mm	2.0	2.0
Weight	EN ISO 23997 (EN 430)	g/sq.m	2520	3300
Width/Length of Sheet	EN ISO 24341 (EN 426)	cm/lm	200/20	200/20
Tile size	EN ISO 24342 (EN 427)	mm	-	300 x 300* / 608 x 608
Number of tiles per package	-	-	-	50 / 20
CLASSIFICATION				
Norm/Product Specification	-	-	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	23-31	34-43
Fire Rating	EN 13 501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
PERFORMANCE				
Wear resistance	EN 660.2	mm³	≤ 15	≤ 7.5
Wear Group	NF 189	group	F	M
Type Binder content	EN ISO 10581	type	II	II
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	sheet ≤ 0.40 tile ≤ 0.25
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≈ 0.03	≈ 0.03
Castor Chair test (type W)	ISO 4918 (EN 425)	-	OK	OK
Thermal Conductivity	EN ISO 10456 (EN 12524)	W/(m.K)	0.25	0.25
Colour Fastness	EN 20 105-B02	degree	≥ 6	≥ 6
Surface Treatment	-	-	PUR	PUR
Chemical Products fastness	EN ISO 26987 (EN 423)	class	OK	OK
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	µg/ m³	< 10	< 10
CE MARKING				
CE	EN 14 041	-		
				

* upon special request

Product description & technical data sheet in *Dutch / French, Spanish / Portuguese, Italian, Swedish, Norwegian* on Gerflor websites.

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor’s Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleaner, or auto scrubber machine with an appropriate pad.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

Further installation and maintenance instructions are available from Gerflor.

MIPOLAM CLASSIC, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION

100% REACH compliant



INDOOR AIR QUALITY

100 times below standards
(TVOC < 10 ug/m³ after 28 days)



RECYCLED CONTENT

25 %



RECYCLABILITY

100 %



LCA

Eco-designed according to a product specific life cycle analysis



WELLNESS

Walking comfort: B class



MIPOLAM ELEGANCE

gerflor.com

FLOORING, ESD & SHOWER SYSTEM



Gerflor®
theflooringgroup

MIPOLAM ELEGANCE

Performances and benefits

Homogeneous vinyl flooring suitable for heavy duty traffic areas

Non-directional design available in 33 references

Available in 2 m sheet (also available in tiles 608 x 608 mm on demand)

Excellent abrasion resistance

Matt finish surface: enhanced design & colour, long lasting appearance

Highly flexible homogeneous flooring, easy to install & weld

Don't forget our complementary ranges!

Handrails

Wall Coverings & Protections

Entrance mats

Skirtings & Profiles

MIPOLAM ELEGANCE EL5


CONDUCTIVE FLOORING

Conductive flexible homogeneous vinyl floorcovering with carbon encapsulated granules available in sheet. Its **conductive backing** ensures optimal and consistent conductive properties. It acts as a continuous conductive $10^4 \leq R_t \leq 10^6$ and has permanent antistatic properties (< 100 V). Mipolam Elegance EL5 is treated with **Evercare™**.


For further details, see our ESD Solutions documentation on www.gerflor.com

Mipolam Elegance EL5

MIPOLAM ELEGANCE



0349 Bluecrop
NCS: 4030-R80B / LRV: 17.8

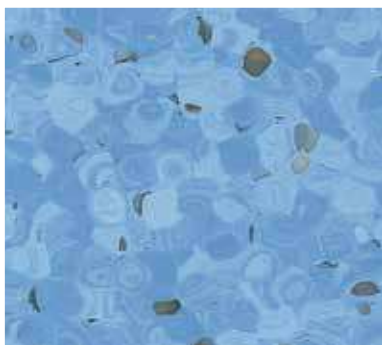

0348 Bluetta
NCS: 2040-R90B / LRV: 34.0



0319 Quetsche
NCS: 3020-R80B / LRV: 31.0




0342 Blueberry
NCS: 2050-B / LRV: 25.8



0341 Bilberry
NCS: 2040-B10G / LRV: 34.8



0340 Jambolan
NCS: 1030-B30G / LRV: 45.6

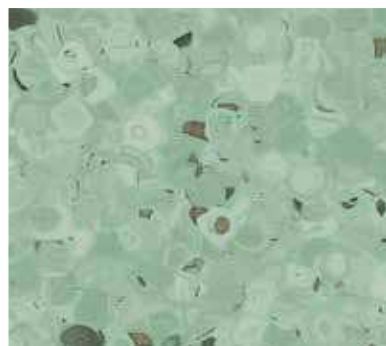

0339 Apple
NCS: 2020-G10Y / LRV: 40.6




0338 Kiwi
NCS: 1040-G50Y / LRV: 47.9



0703 Lime
NCS: 1030-G90Y / LRV: 58.5



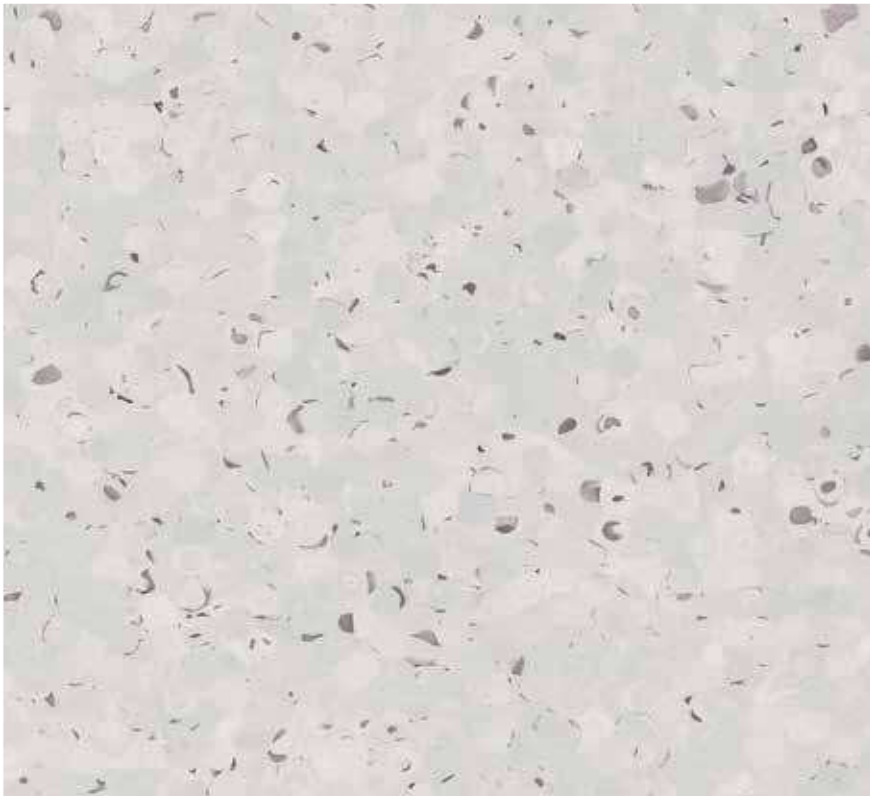

0696 Ginger
NCS: 1502-B / LRV: 59.7



0347 Mangoustan
NCS: 1005-Y60R / LRV: 67.9



0705 Patisson
NCS: 1502-Y / LRV: 64.4



0343 Pecan
NCS: 2500-N / LRV: 46.9




0318 Grape
NCS: 2005-R80B / LRV: 51.4




0697 Greenstone
NCS: 3005-R80B / LRV: 37.1



0321 Olive
NCS: 8502-B / LRV: 6.9


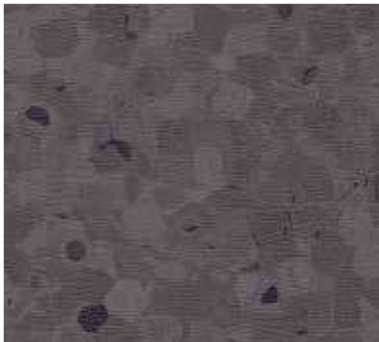


0344 Nutmeg
NCS: 7000-N / LRV: 11.8

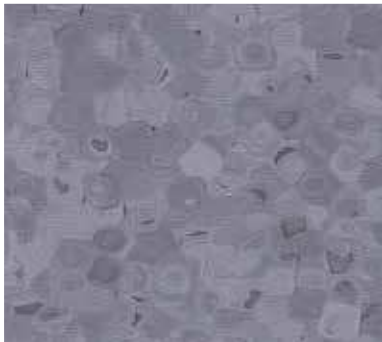

0704 Raspberry Grey
NCS: 5005-R80B / LRV: 20.3

MIPOLAM ELEGANCE

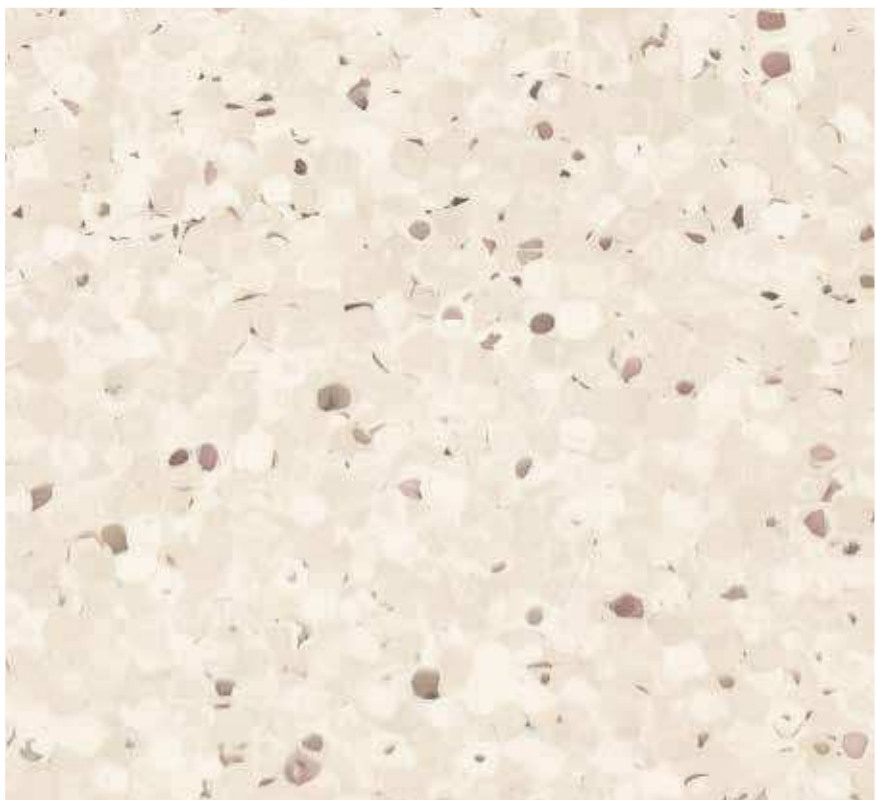

0322 Jicama
NCS: 1505-Y20R / LRV: 67.8



0328 Almond
NCS: 1505-Y30R / LRV: 61.0




0323 Nut
NCS: 2005-Y20R / LRV: 50.6



0698 Cacao
NCS: 6010-Y30R / LRV: 17.7



0329 Hazelnut
NCS: 3010-Y40R / LRV: 36.4

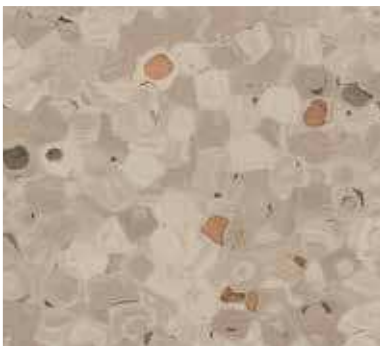

0324 Chestnut
NCS: 3005-Y20R / LRV: 37.2






0336 Acerola
NCS: 2570-Y80R / LRV: 12.6



0702 Kumquat
NCS: 3060-Y60R / LRV: 19.8



0700 Melon
NCS: 1040-Y30R / LRV: 48.2

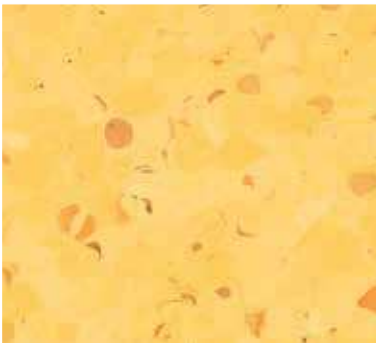


0333 Ananas
NCS: 0550-Y10R / LRV: 57.9




0699 Banana
NCS: 0520-Y20R / LRV: 64.3




0327 Pear
NCS: 1015-Y30R / LRV: 55.0

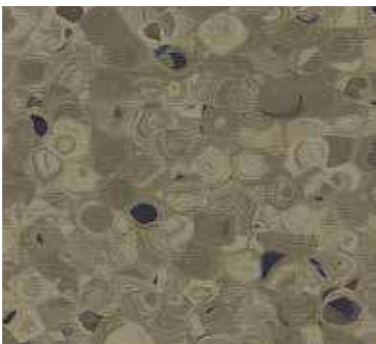

0326 Jojoba
NCS: 5020-G70Y / LRV: 18.9

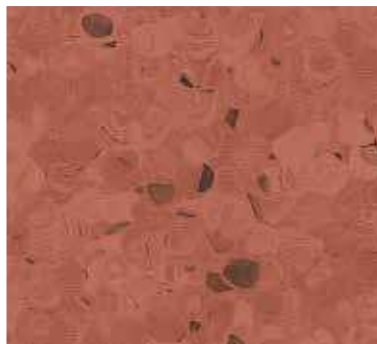

0330 Litchi
NCS: 4030-Y80R / LRV: 17.5

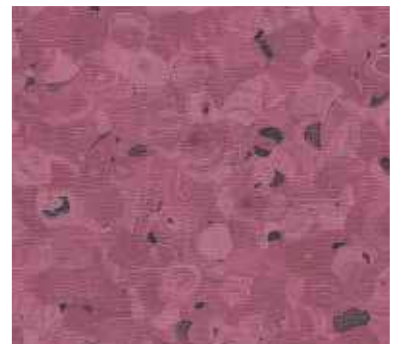

0331 Plum
NCS: 4040-R10B / LRV: 15.0



			Mipolam Elegance	Elegance SD	Mipolam Elegance EL5
DESCRIPTION					
Total thickness	EN ISO 24346 (EN 428)	mm	2.00	2.40	2.00
	ASTM F386-02	inch	0.08	-	-
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	-	2.40	-
Weight	EN ISO 23997 (EN 430)	g/sq.m	2850	3100	3060
Width/length of sheet	EN ISO 24341 (EN 426)	cm/lm	200 / 20	200 / 20	200 / 20
	-	feet - inch	6'6" / 66"	-	-
Coverage / roll	-	sq.m	40	-	-
	-	sq.ft	430.56	-	-
Tile size	EN ISO 24342 (EN 427)	mm	608 x 608 ⁽¹⁾	-	-
Number of tiles per package	-	-	20	-	-
CLASSIFICATION					
Norm/product specification	-	-	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)
	ASTM F 1913-04	-	compliant	-	-
European classification	EN ISO 10874 (EN 685)	class	34-43	34-43	34-43
Fire rating	EN 13501-1	class	Bfl - s1	Bfl - s1	Bfl - s1
	ASTM E648-08	class	Class I	-	-
Electrical resistance ⁽³⁾	EN 1081	Ohm	-	-	10 ⁴ ≤ Rt ≤ 10 ⁶
	IEC 61340-4-1	Ohm	-	-	≤ 10 ⁹
	IEC 61340-4-5	Ohm	-	-	≤ 10 ⁹
	ANSI / ESD-STM 7.1	Ohm	-	-	≤ 10 ⁹
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
	IEC 61340-4-5	V	-	-	< 100 ⁽⁴⁾
Protection against electrostatic discharges	ESD 20.20	-	-	-	OK
	IEC 61340-5-1	-	-	-	OK
Slip resistance wet : ramp test with oil	DIN 51130	class	-	R9	R9
Slip resistance wet : barefoot	DIN 51097	class	-	A	-
Water tightness	EN 13553	-	-	OK	-
PERFORMANCE					
Wear resistance	EN 660.2	mm ³	≤ 2.0	< 4.0	< 4.0
Wear group	NF 189	group	T	P	P
Type binder content	ISO 10581	type	I	I	I
Dimensional stability	EN ISO 23999 (EN 434)	%	Sheet ≤ 0.40 - Tile ≤ 0.25	≤ 0.40	≤ 0.40
Impact sound insulation	EN ISO 717-2	dB	5	-	-
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≈ 0.02	≤ 0.10	≈ 0.02
Residual indentation (measure)	-	mm	-	≈ 0.03	-
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	-	OK
Thermal conductivity	EN ISO 10456 (EN12524)	W/(m.K)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	-	Evercare™
Chemical resistance	EN ISO 26987 (EN 423)	class	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99 % inhibits growth	-	-
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®
CE marking					
CE	EN 14041	-			
		-			

(1) Products available in tiles for a minimum quantity order of 500 sq.m
(2) The implementation of an effective cleaning method is the best defence against infection
(3) Measured before installation - (4) Measured with ESD shoes (ABEBA and Uvex)

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/05/2018 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

MIPOLAM ELEGANCE, LESS SPEAKING FOR MORE ACTIONS

COMPOSITION

100% REACH compliant

INDOOR AIR QUALITY

100 times lower than norm requirements (TVOC < 10 µg/m³ after 28 days)

RECYCLED CONTENT

25%

RECYCLABILITY

100%

LCA

Eco-designed according to a product specific life cycle analysis

WELLNESS

Walking comfort < 75 dB

TARALAY INITIAL

[gerflor.com](https://www.gerflor.com)



Gerflor[®]
theflooringgroup





TARALAY INITIAL



High performance indentation / acoustic:

- Compact: 0,03mm / 6 dB
- Comfort: 0,10mm / 19 dB



Easy maintenance:

Protecsol® Surface Treatment reduces cost and time of cleaning - no wax



All references are available in compact and comfort




Comfort and Safety:

High Density foam backing for walking comfort and fall absorption







TARALAY INITIAL

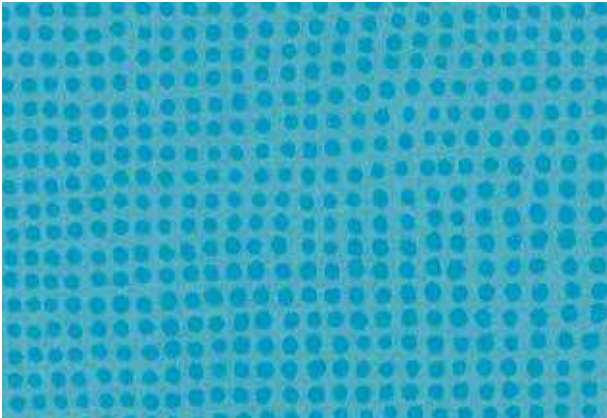

0825 - Diversion Turquoise
NCS: 2050-B20G / LRV: 30.5

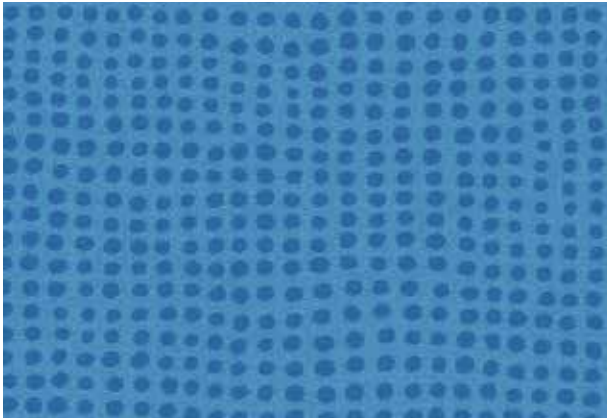


0597 - Diversion Atlantique
NCS: 3050-R90B / LRV: 21.4

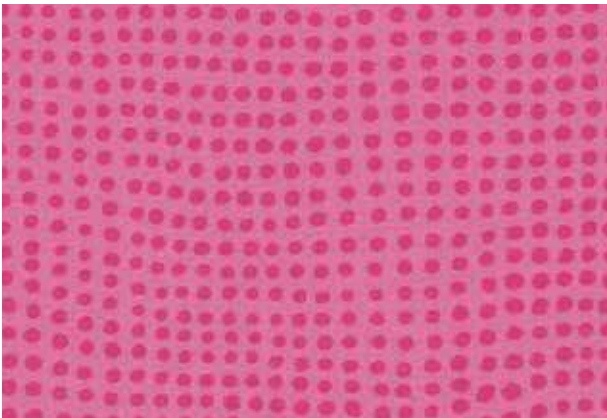

0599 - Diversion Rose
NCS: 2050-R20B / LRV: 23.5



0516 - Diversion Bordeaux
NCS: 4040-R20B / LRV: 10.8

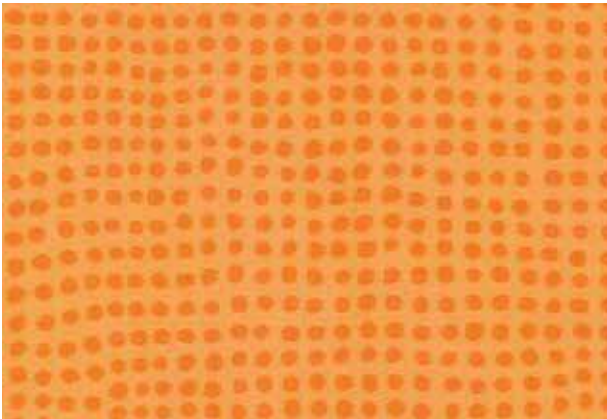

0600 - Diversion Clementine
NCS: 1080-Y40 / LRV: 36.3



0595 - Diversion Grenade
NCS: 2070-Y90R / LRV: 17



0515 - Diversion Kiwi
NCS: 2050-G70Y / LRV: 45



0596 - Diversion Mimosa
NCS: 1060-Y20R / LRV: 56.2




0823 - Tweedy Beige
NCS: 3005-Y50R / LRV: 44.9




0545 - Tweedy Natural
NCS: 2502-Y / LRV: 45.2



0822 - Tweedy Taupe
NCS: 6005-Y20R / LRV: 17.5

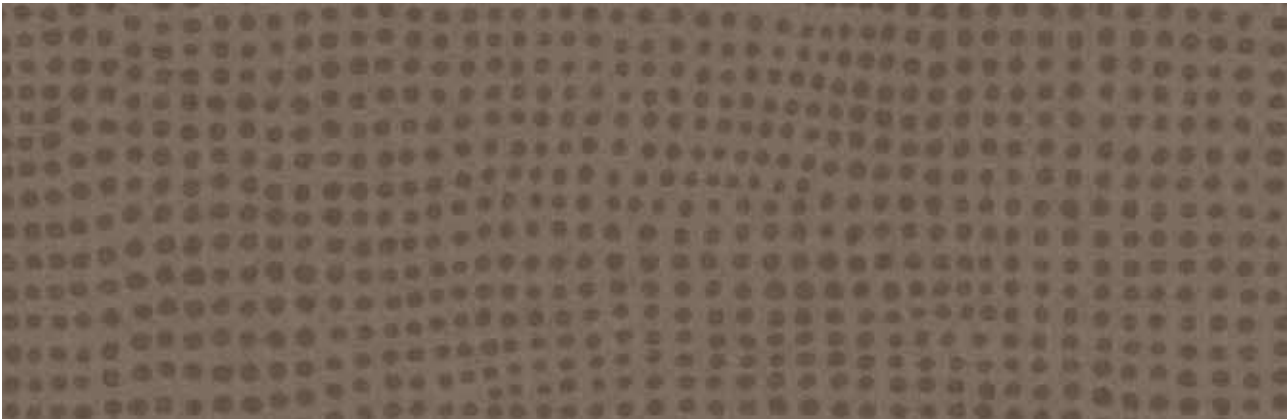

0049 - Diversion Carbone
NCS: 6005-Y50R / LRV: 13.7

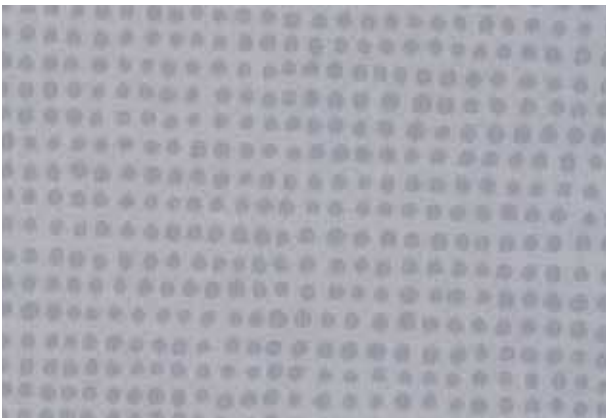

0824 - Diversion Souris
NCS: 3502-B / LRV: 36.7



0047 - Diversion Ivoire
NCS: 1502-Y / LRV: 60.7

TARALAY INITIAL



No strip
Continuous
design

0829 - Filament Cream
NCS: 2005-Y20R / LRV: 50.3



16.6 cm

0797 - Habana Ivory
NCS: 2005-Y50R / LRV: 52.7



16.6 cm

0828 - Habana Beige
NCS: 4010-Y30R / LRV: 35.8



16.6 cm

0588 - Noma Clair
NCS: 3005-Y50R / LRV: 36.5

Comfort version 




No strip
Continuous
design

0024 - Renzo Chamois
NCS: 3020-Y30R / LRV: 35

Compact version 




6.2 cm

0779 - Ottawa Poplar
NCS: 2030 - Y30R / LRV: 40




10 cm

0636 - Esterel Blond
NCS: 5030-Y40R / LRV: 25.6




16.6 cm

0589 - Noma Marron
NCS: 5010 - Y50R / LRV: 22.1

TARALAY INITIAL



No strip
Continuous
design

0590 - Renzo Steel
NCS: 6500 / LRV: 14.5



No strip
Continuous
design


0826 - Filament Grey
NCS: 3500-N / LRV: 39.4



No strip
Continuous
design

0518 - Esterel Chocolate
NCS: 6005-Y50R / LRV: 16.3

0799 - Filament Light
NCS: 4005-Y20R / LRV: 31.7

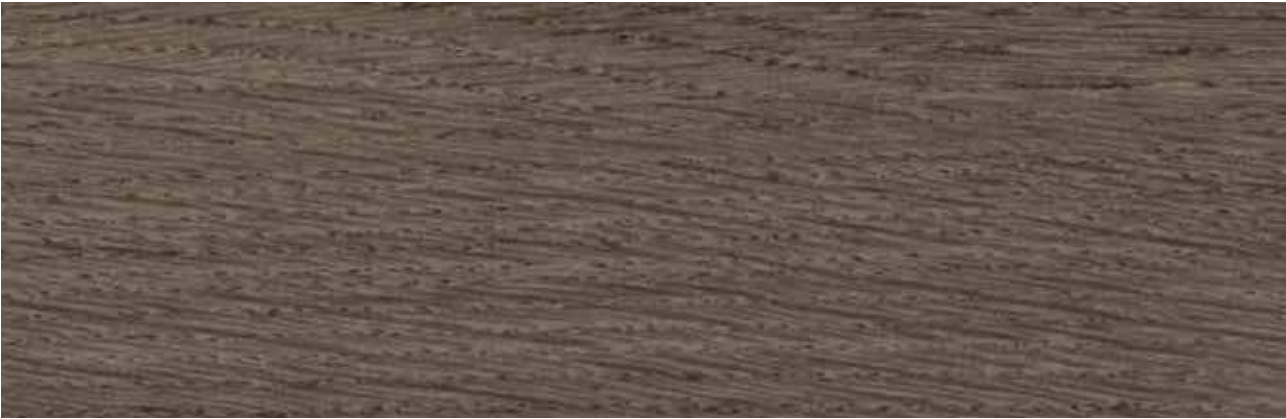


No strip
Continuous
design

0069 - Renzo Noisette
NCS: 7010 - Y30R / LRV: 14.2



0037 - Urban Souris
NCS: 3502-R / LRV: 34.8

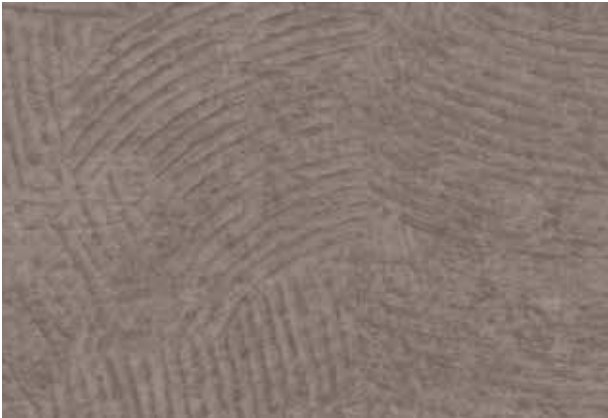


0035 - Urban Gris
NCS: 5502-R / LRV: 24.1



0465 - Strada Ciment
NCS: 4502-R / LRV: 25.7



0791 - Strada Metallic
NCS: 5005-Y20R / LRV: 22.3

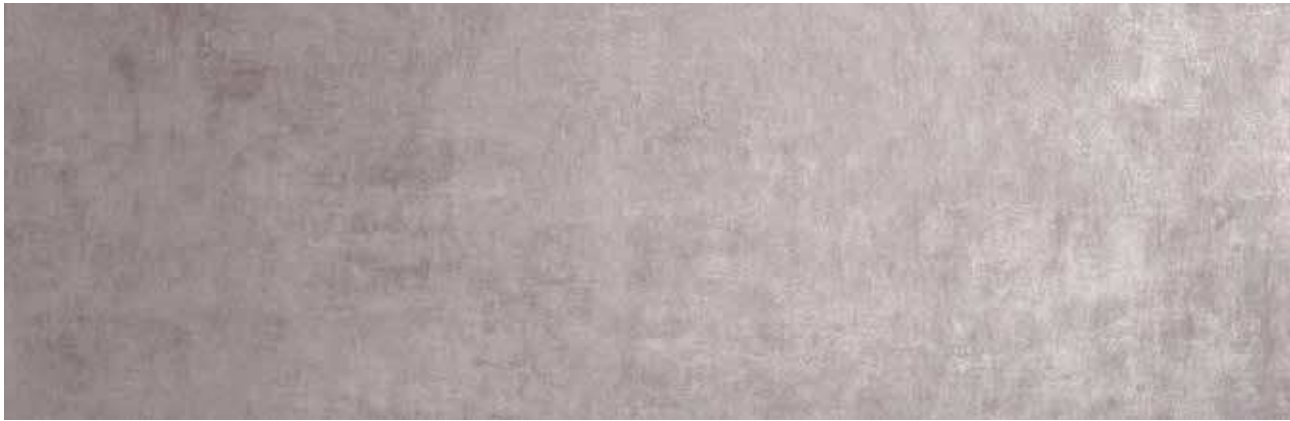

0790 - Strada Chrome
NCS: 3500-N / LRV: 21.4

TARALAY INITIAL COMPACT PRO

TARALAY INITIAL COMFORT PRO

DESCRIPTION

Total thickness	EN ISO 24346 [EN 428]	mm	2.00	3.35
	ASTM F386-02	inch	0.08	0.13
Wearlayer thickness	EN ISO 24340 [EN 429]	mm	0.70	0.65
	ASTM F410-02	inch	0.028	0.026
Weight	EN ISO 23997 [EN 430]	g/sq.m	2635	2825
Width/length of sheet	EN ISO 24341 [EN 426]	cm / lm	200 / 25	200 / 25
	-	feet - inch	6'6" / 82'	6'6" / 82'

CLASSIFICATION

Norm/product specification	-	-	EN ISO 10582 [EN 649]	EN 651
European classification	EN ISO 10874 [EN 685]	class	34 - 43	34 - 42
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet: ramp test with oil ^[1]	DIN 51 130	class	R10	R10

PERFORMANCES

Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T
Type binder content	EN ISO 10582	Type	I	-
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	ca. 0.03	0.10
Impact sound insulation	EN ISO 717-2	dB	6	19
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK	OK
Thermal conductivity	EN ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	ProtecSol®	ProtecSol®
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[2]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth

ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®

CE marking

CE	EN 14041	-		
		-		

[1] For lifetime sustainable wet resistance, please refer to Tarasafe ranges
[2] The implementation of an effective cleaning regime is the best defence against infection

IMPORTANT: The information contained in this document is valid from 01/09/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

TARALAY INITIAL, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION
100% REACH



INDOOR AIR QUALITY
100 times lower than norms requirements
(TVOC < 10 ug/m³ after 28 days)



RECYCLABILITY
100%



LCA
Eco-designed according to a product specific life cycle analysis



WELLNESS
Anti slip R10
Comfort version : Walking comfort < 65 dB (best certification) and impact sound insulation - 19dB



Be connected!



#Gerflor




www.gerflor.com

TIMBERLINE

[gerflor.com](https://www.gerflor.com)




TIMBERLINE

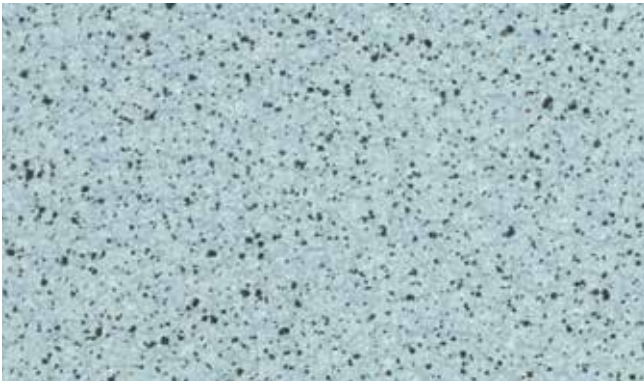


2177 Pixel Sky



2182 Pixel Ocean

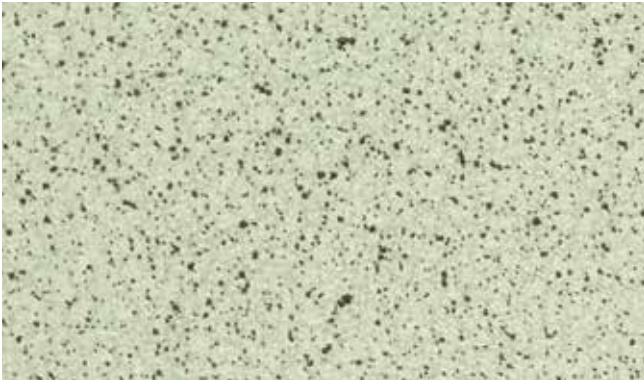

2180 Pixel Light Green

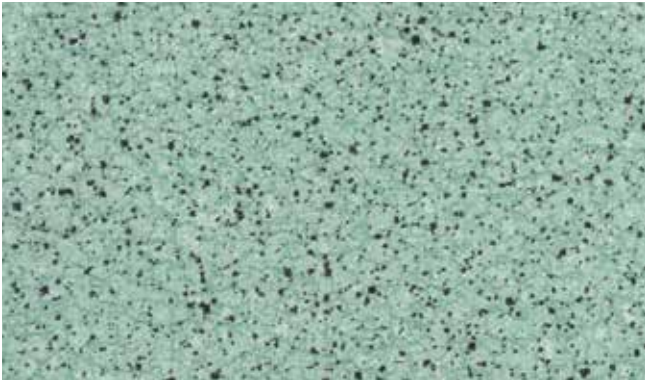


2181 Pixel Meadow




0621 Pixel Vanilla




2178 Pixel Paprika

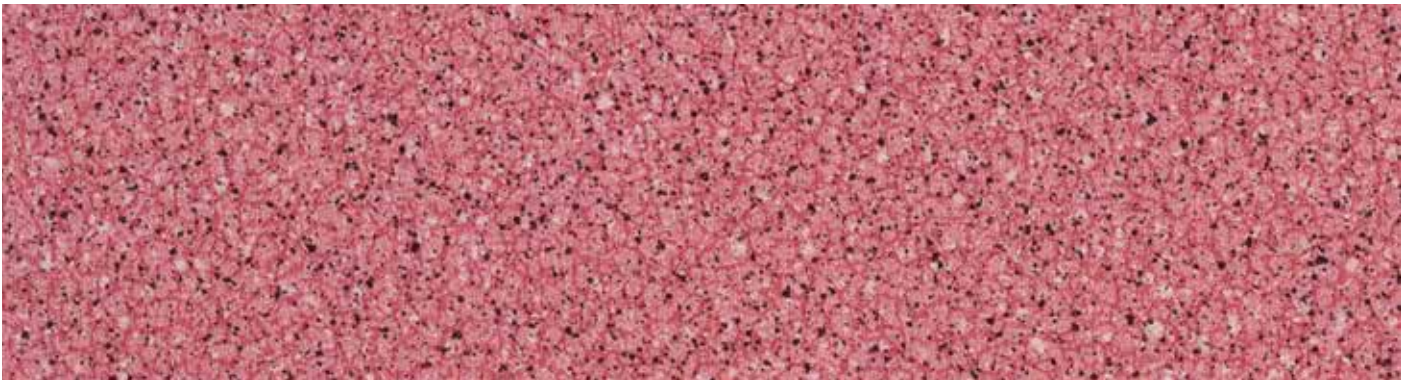


2188 Pixel Raspberry

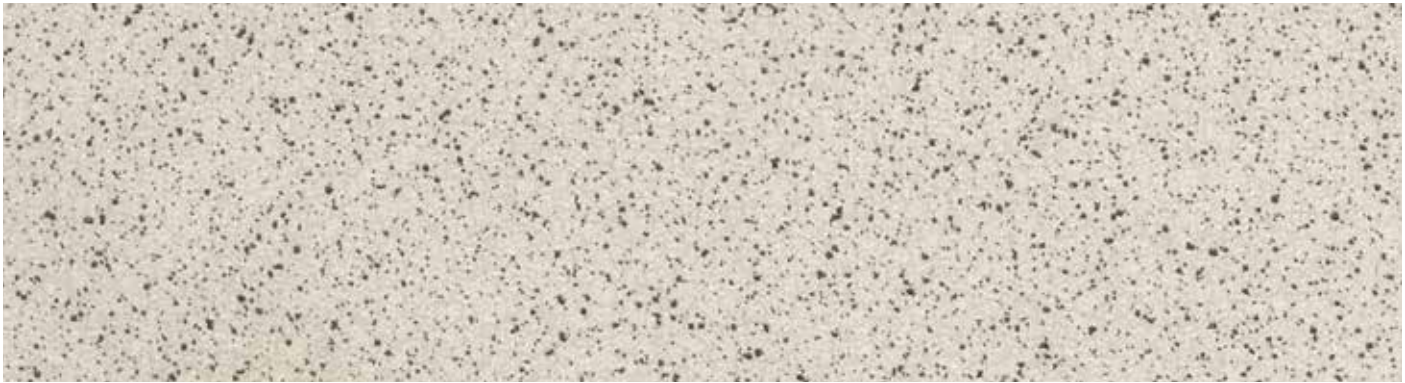


2175 Pixel Clear

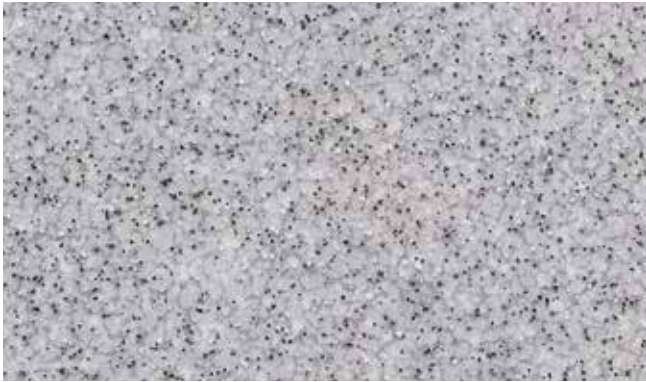

0597 Pixel Silver

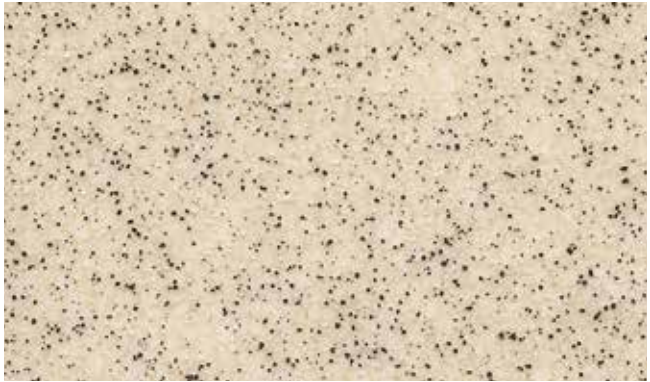


0639 Pixel Sand

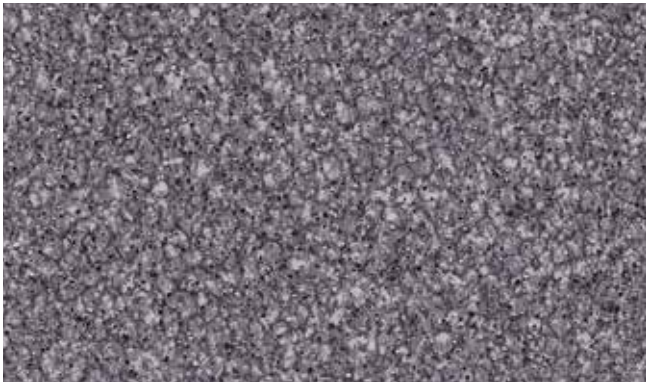

0632 Pixel Anthracite



2176 Pixel Taupe

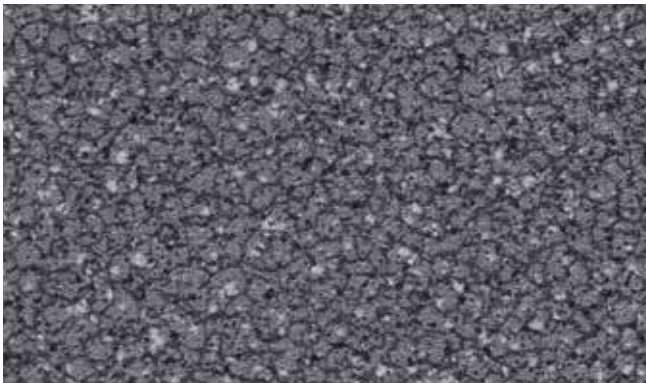

2179 Pixel Black



2183 Pixel Earth

TIMBERLINE



0137 Aurore Natural



0422 Maple Light




0492 Cabana Oak Brown



0449 Toronto Miel



0847 Oak Light



0452 Oak Select Medium



2012 Sherwood Clear



0669 Chene Light



0476 Noma Miel



2010 Bruges Naturel




2007 Cognac Blond

TIMBERLINE



1893 Harbor Blue



1751 Timber Grey



0542 Whitewashed Oak Warm Grey



2006 Cognac Pearl



0562 Walnut Grey Brown



2017 Sherwood Grey



2015 Sherwood Brown



0502 Oak Select Grey

No s
Cont
desi



16 cm



16.6 cm

1451 Noma Kola



20 cm



16.6 cm

1518 Factory White




25 cm



16.6 cm

1900 Harbor Nature

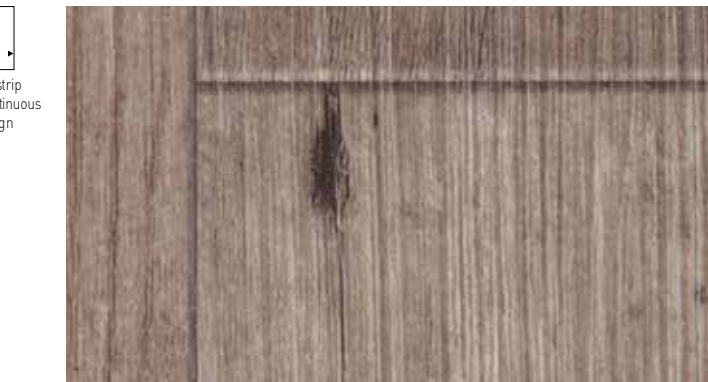

10 cm



16.6 cm

1971 Bruges Clear

0432 Rustic Pine Warm Grey

TIMBERLINE

DESCRIPTION

Total thickness	EN ISO 24346 (EN 428)	mm	2.00
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	0.70
Weight	EN ISO 23997 (EN 430)	g/sq.m	2560
Width/length of sheet	EN ISO 24341 (EN 426)	cm/lm	200 / 20 - 400 / 20

CLASSIFICATION

Norm/product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl - s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance ⁽¹⁾	DIN 51130	class	R10


PERFORMANCE

Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	NF 189	group	T
Type binder content	ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Residual indentation (measure)	-	mm	≈ 0.05
Impact sound insulation	EN ISO 717-2	dB	≈ 6
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN12524)	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance ⁽²⁾	EN ISO 26987 (EN 423)	-	OK

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg/m³	< 100
--------------------	-------------	-------	-------

CE marking

CE	EN 14041	-	
		-	

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.
(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

Product description and technical data sheet available in various languages.
See our Gerflor websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/01/2019 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

TIMBERLINE, ACTIONS SPEAK LOUDER THAN WORDS



COMPOSITION
100% REACH



RECYCLABILITY
100 %



INDOOR AIR QUALITY
10 times lower than norm requirements
(TVOC < 100 µg/m³ after 28 days)



LCA
Eco-designed according to a product-specific life cycle analysis



WELLNESS
Anti slip R10

Be connected!



#Gerflor



www.gerflor.com




MIPOLAM SYMBIOZ™

gerflor.com



Gerflor®
theflooringgroup

MIPOLAM SYMBIOZ™

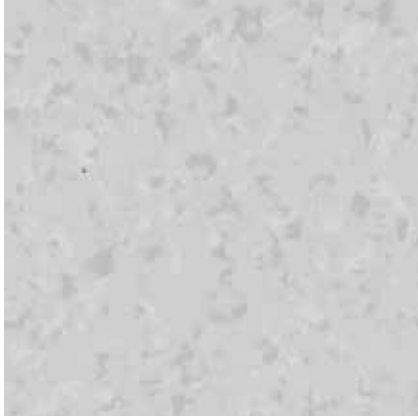

6009 Grey Stone
NCS: 2500-N / LRV: 52.4



6008 Calico
NCS: 1500-N / LRV: 66.8




6039 Pebble
NCS: 4000-Y / LRV: 34.8



6010 Mist
NCS: 2502-Y / LRV: 47.8



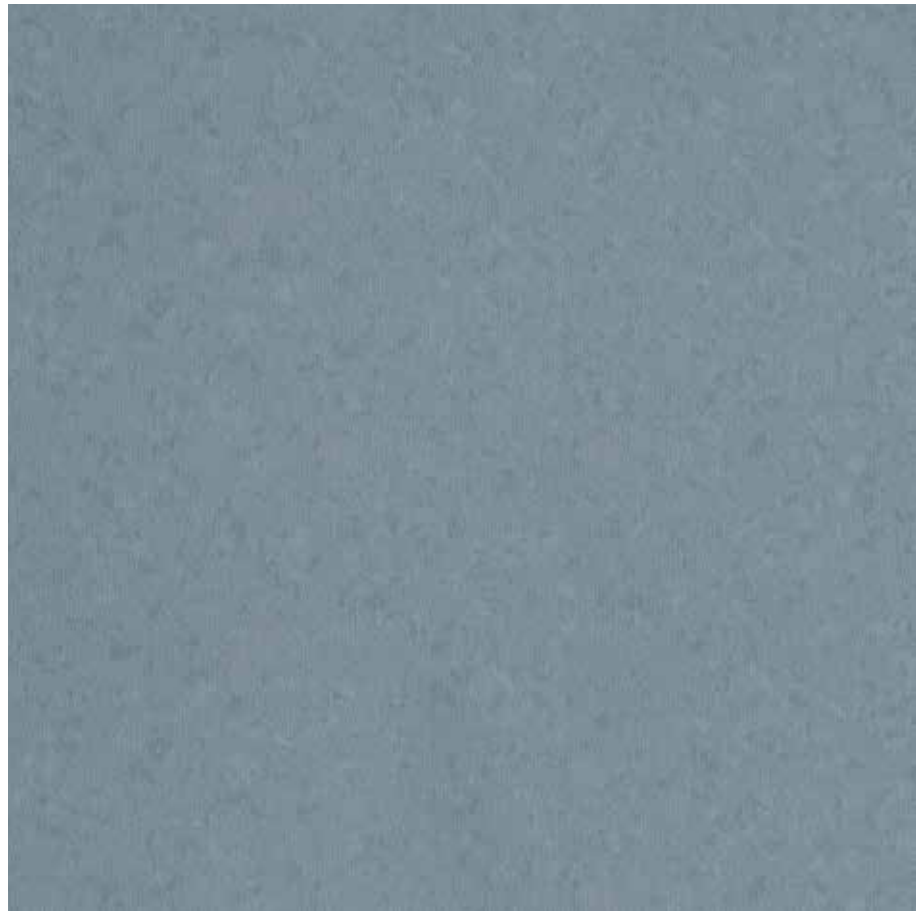


NEW

6050 Hurricane
NCS: 5010-B10G / LRV: 20.2



NEW

6030 Stonehenge
NCS: 3010-R80B / LRV: 36.0

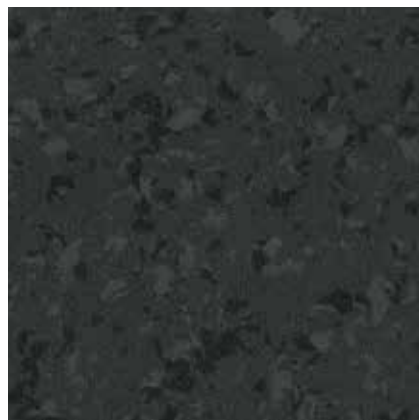


6059 Black Diamond
NCS: 8500-N / LRV: 5.8




6029 Cloud
NCS: 4000-N / LRV: 35.7

MIPOLAM SYMBIOZ™

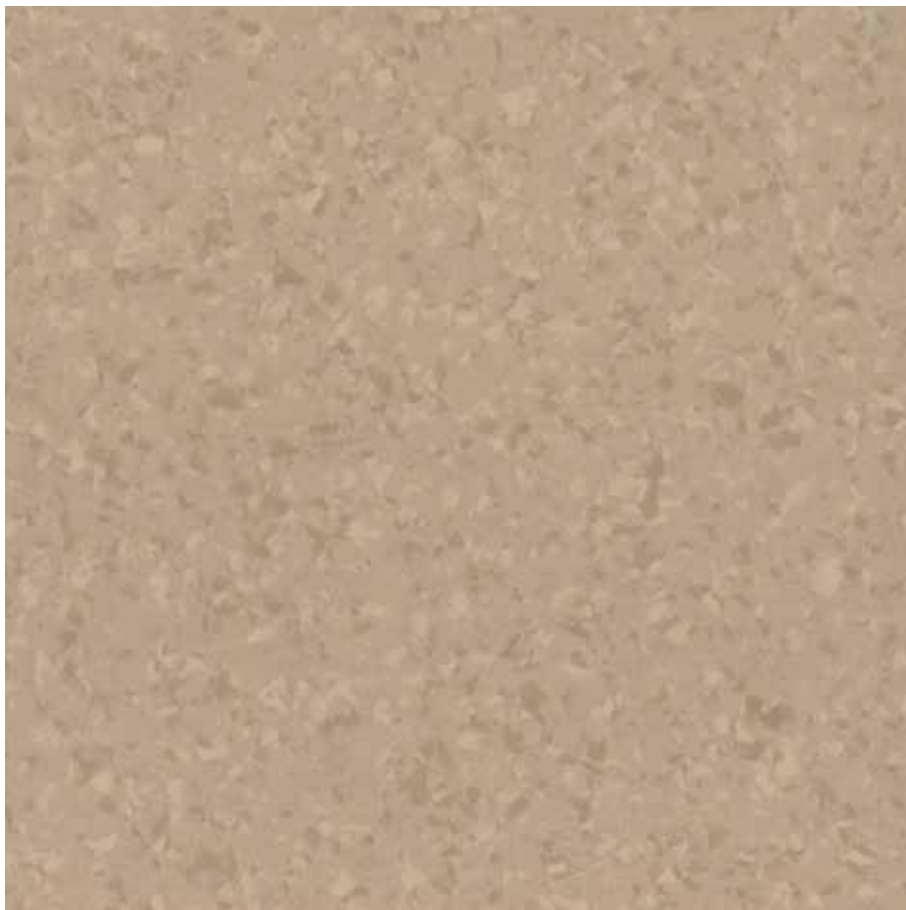


6034 Mole
NCS: 4010-Y30R / LRV: 33.5

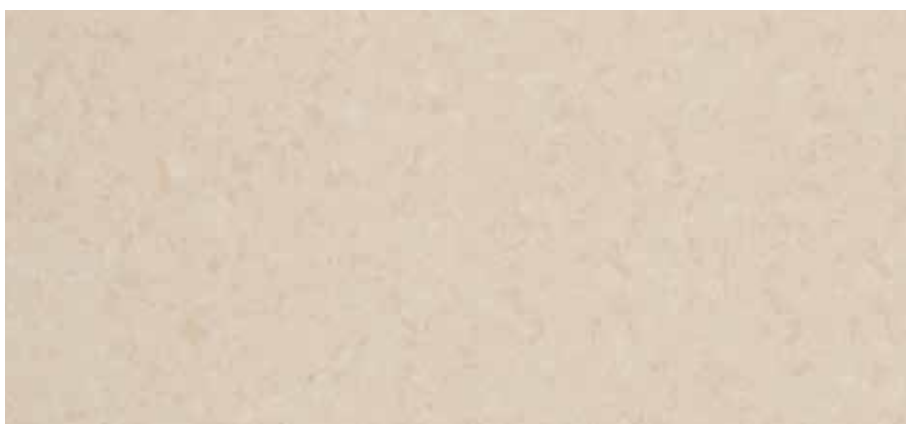

6005 Ghibli
NCS: 2010-Y20R / LRV: 52.2




6043 Wood
NCS: 5005-Y50R / LRV: 24.3

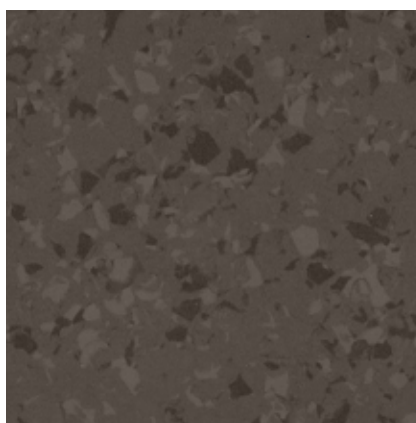

6045 Chocolate
NCS: 7005-Y80R / LRV: 9.3

NEW



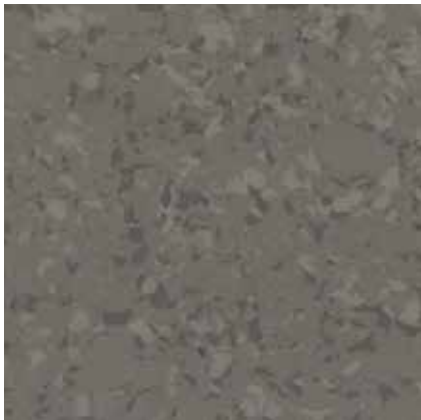

6044 Sea Storm
NCS: 6502-Y / LRV: 15.7




6041 Clay
NCS: 3005-Y20R / LRV: 41.8



6031 Breeze
NCS: 2005-Y40R / LRV: 48.5



6001 Cotton
NCS: 1005-Y30R / LRV: 72.0

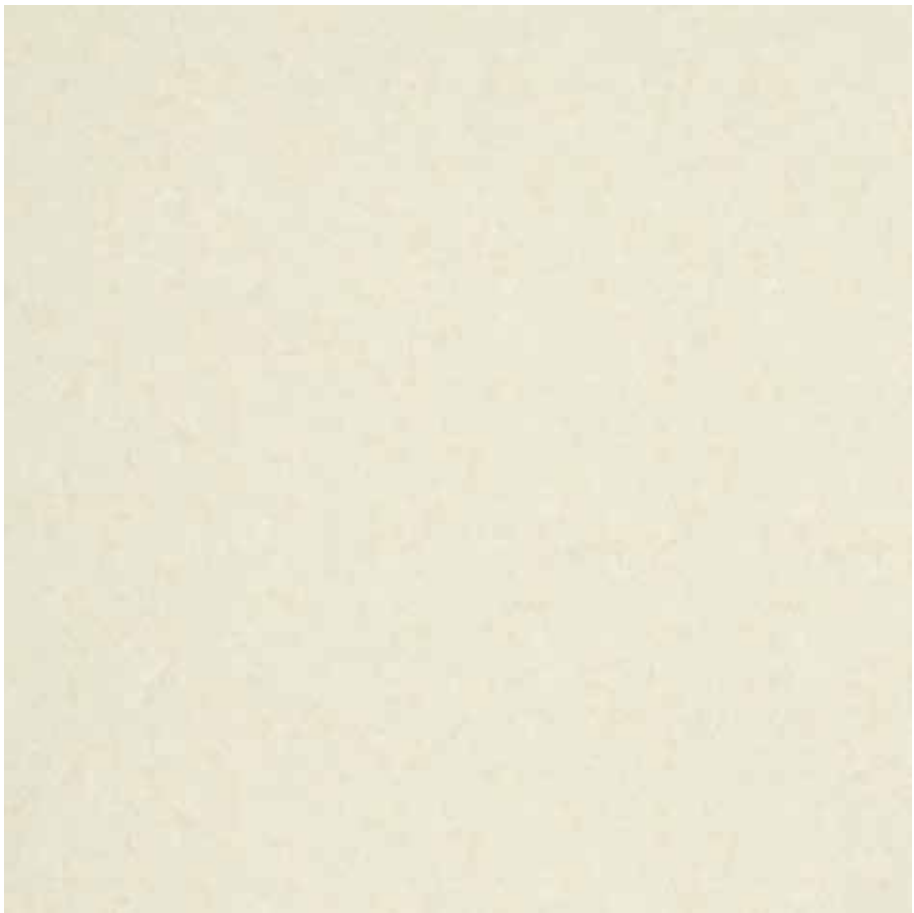

NEW

6002 Lipica
NCS: 1505-Y20R / LRV: 67.8

MIPOLAM SYMBIOZ™



NEW

6057 Musk

NCS: 3020-G40Y / LRV: 40.0



NEW

6067 Kaki

NCS: 5010-G30Y / LRV: 22.3



NEW

6047 Sauge

NCS: 2010-G40Y / LRV: 53.0



6027 Acacia

NCS: 2040-G70Y / LRV: 48.2





6032 Sunshine
NCS: 1040-Y10R / LRV: 55.4




NEW

6075 Cardinal
NCS: 2570-Y80R / LRV: 14.6



NEW


6065 Segesta
NCS: 4040-Y80R / LRV: 18.7

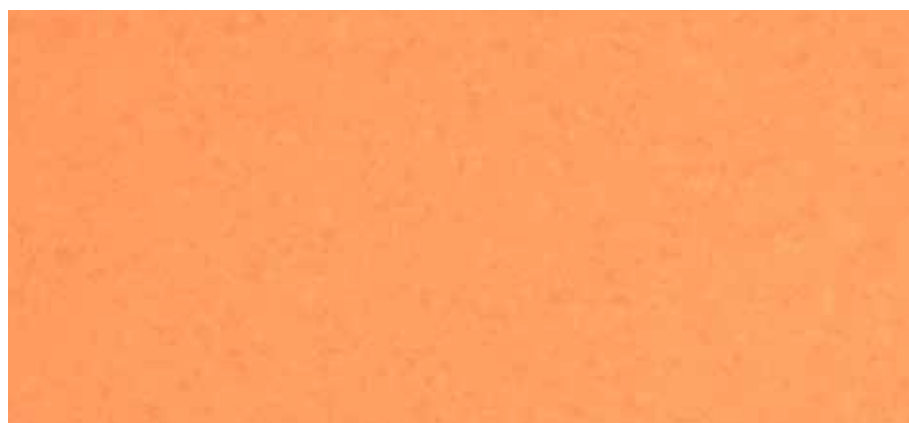


NEW

6025 Tangelo
NCS: 2050-Y50R / LRV: 35.8

MIPOLAM SYMBIOZ™

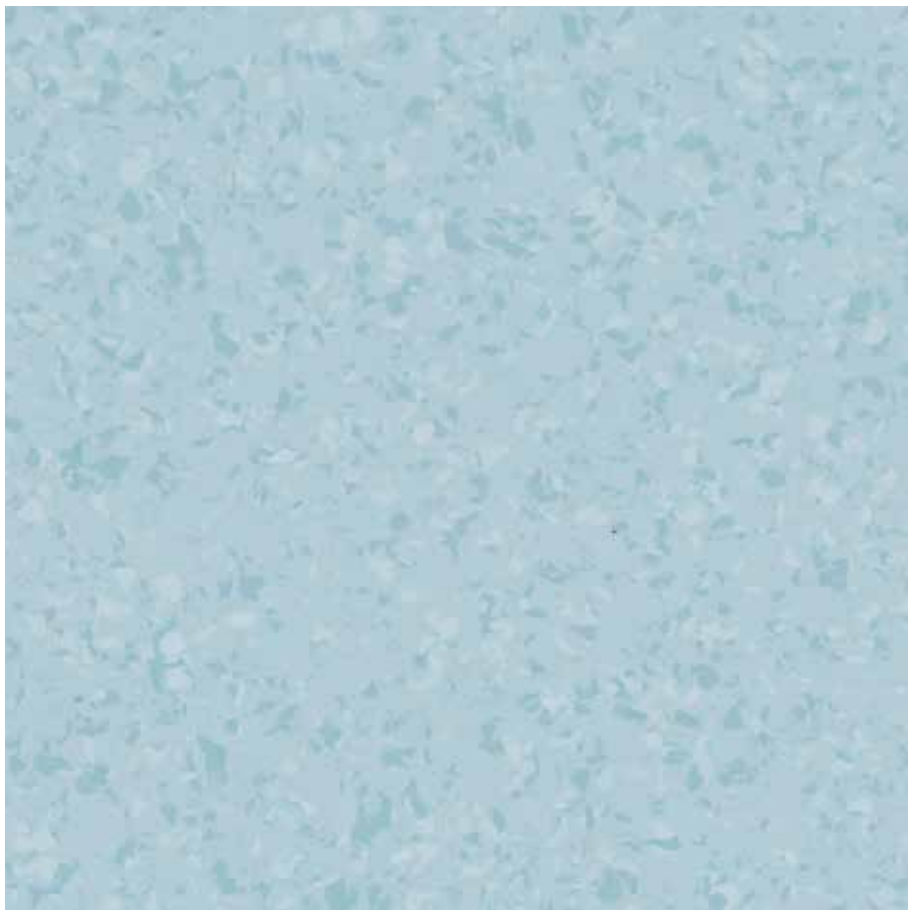

6006 Blue Sky
NCS: 1515-B / LRV: 52.7

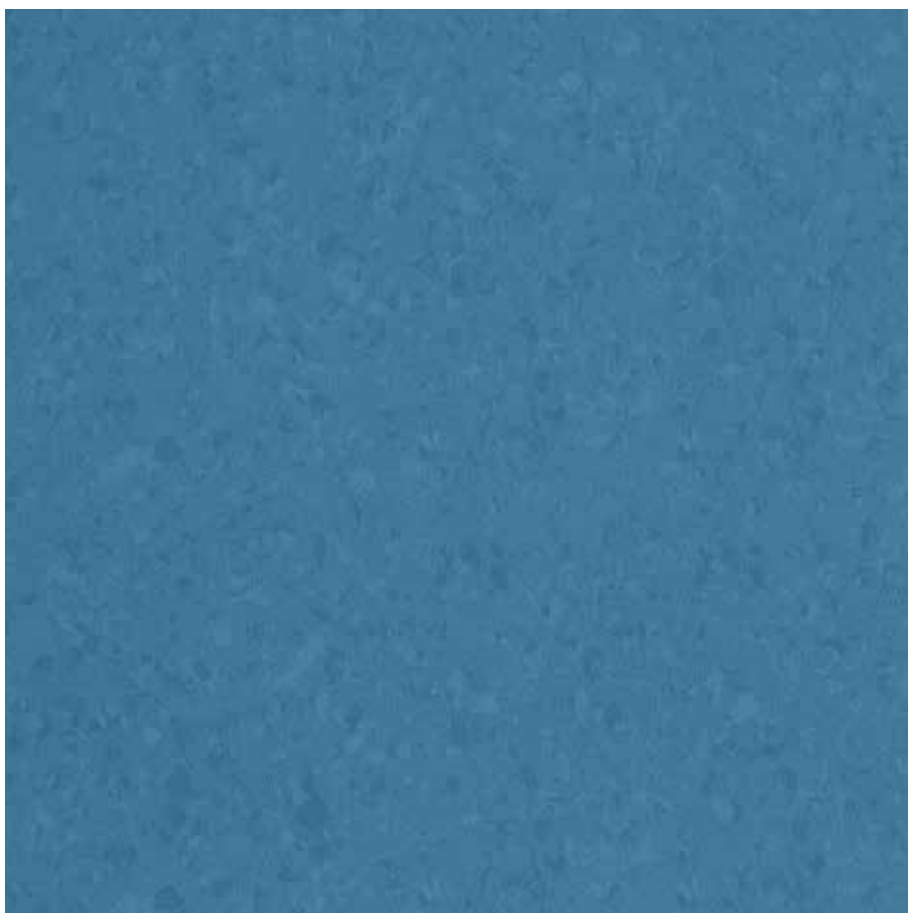

6036 Oceania
NCS: 5030-R90B / LRV: 13.7

NEW




MIPOLAM SYMBIOZ™



6202 Nova Lipica
NCS: 1005-Y20R / LRV: 67.0



6243 Nova Wood
NCS: 5005-Y50R / LRV: 25.4

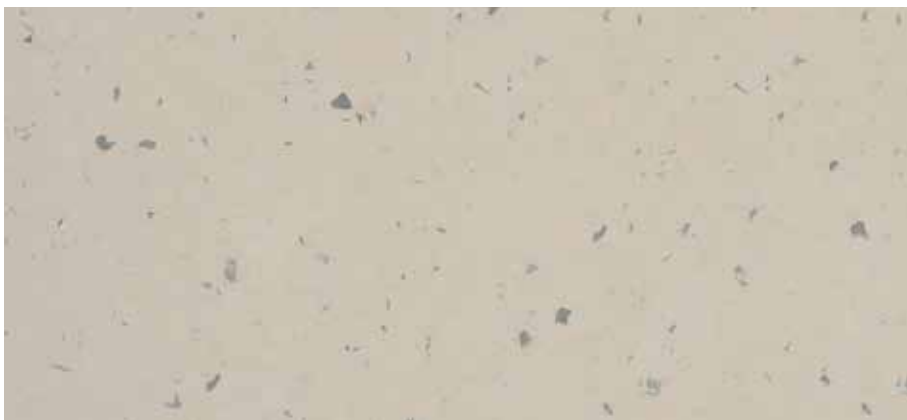

6241 Nova Clay
NCS: 3005-Y20R / LRV: 41.6






6220 Nova Stonehenge
NCS: 3010-R80B / LRV: 36.4



6209 Nova Grey Stone
NCS: 2500-N / LRV: 53.0




6208 Nova Calico
NCS: 1500-N / LRV: 63.6

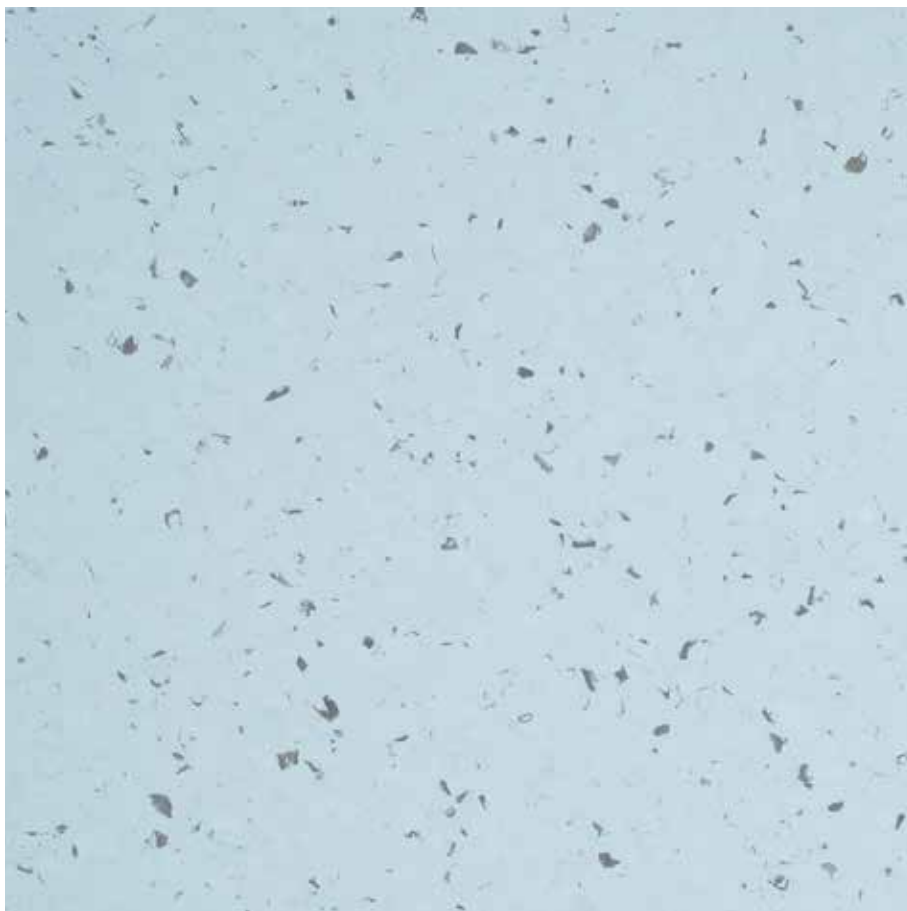

6206 Nova Blue Sky
NCS: 1515-B / LRV: 51.9

TARALAY IMPRESSION & UNI

gerflor.com

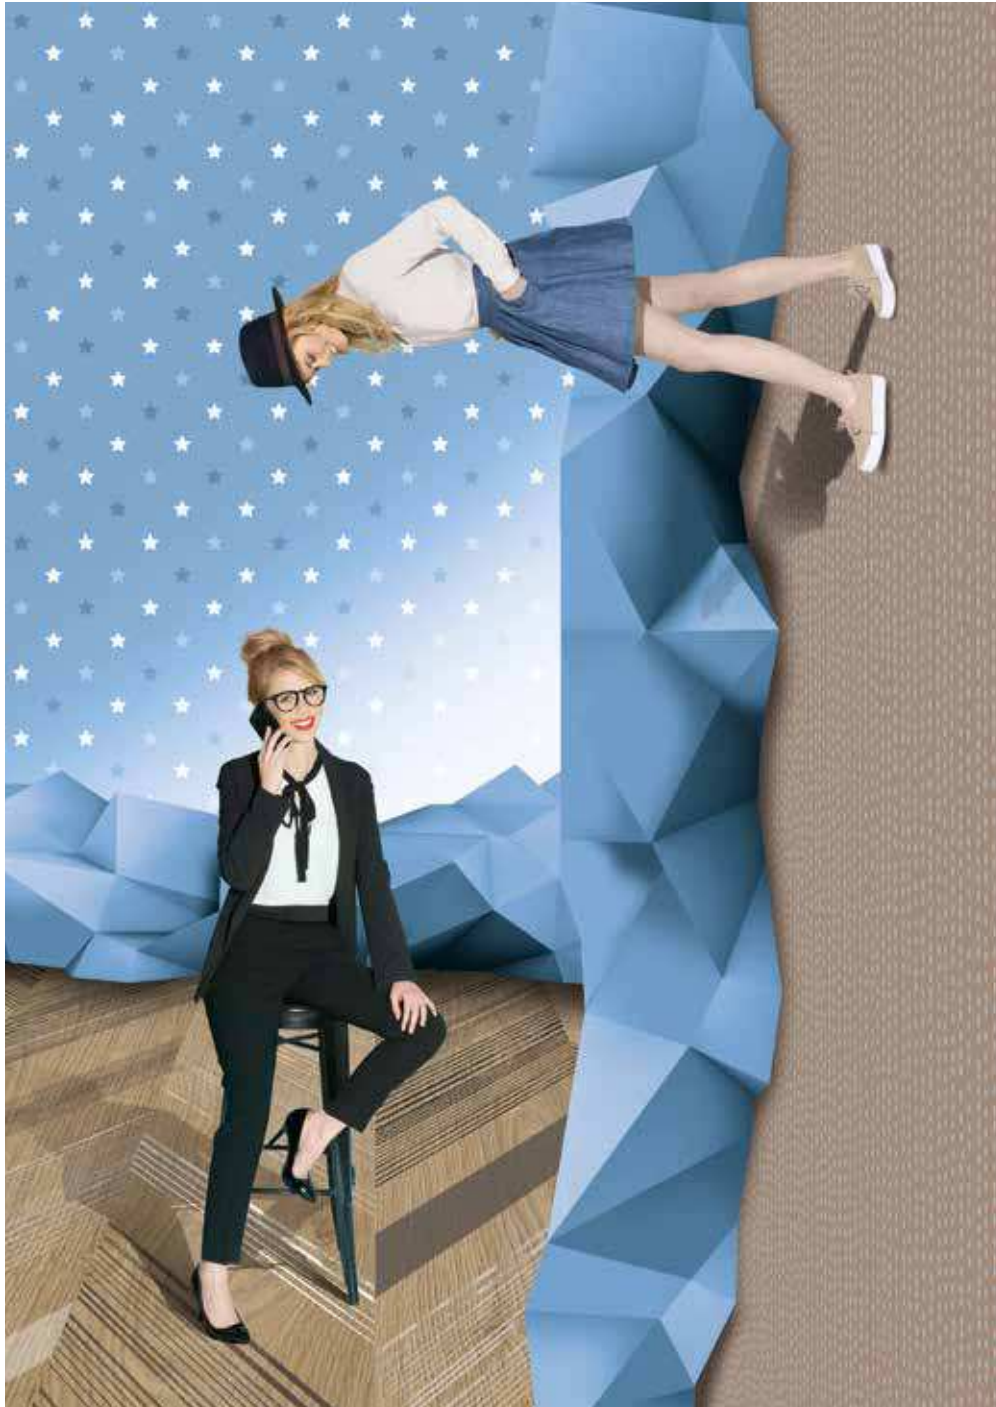

Gerflor[®]
theflooringgroup






TARALAY IMPRESSION



0373 - Noma Ice




0723 - Charme Pecan




0719 - Infinity Lichen



0068 - Renzo Pecan



0025 - Renzo Taupe



0726 - Sycamore Dark



16.6 cm

0519 - Noma Beige



No strip
Continuous
design

0680 - Infinity Greige



No strip
Continuous
design

0725 - Sycamore Light Brown



16.6 cm

0773 - Portobello



11.2 cm
14.2 cm
8.7 cm
6.4 cm

0734 - Loft Chestnut



16.6 cm

0371 - Noma Rustic



10 cm

1314 - Walnut brown

TARALAY IMPRESSION



0538 - Habana Vinales



0722 - Herringbone Blond



0522 - Habana Trinidad



0724 - Herringbone Chatain



0721 - Charme Natural



0528 - Walnut Cream




0720 - Infinity Aube



0727 - Sycamore Vanilla



0760 - Moon Island



0671 - Loft Light Brown

TARALAY IMPRESSION & UNI



0769 - Mohair White



0523 - Cemento Genova



0543 - Cemento Brescia



0767 - Mohair Natural



0524 - Cemento Capri



0766 - Mohair Dark



0525 - Cemento Modena



0770 - Gentlemen Clear




0771 - Gentlemen Grey



0772 - Gentlemen Coffee




0774 - Trame Clear

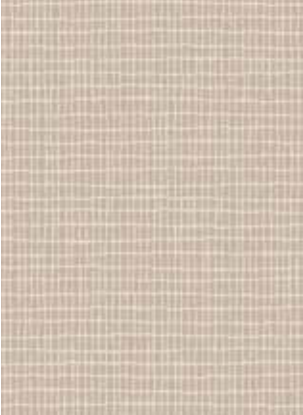

0776 - Trame Beige



0777 - Trame Rose

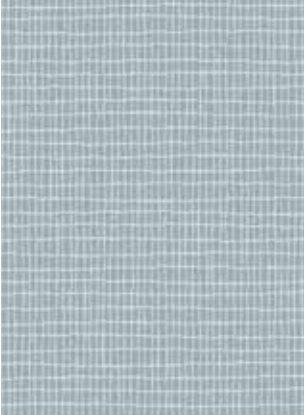


0775 - Trame Blue




0730 - **Corner** Light Beige



0756 - **Kubes** Beige




6267 - **Uni** Beige

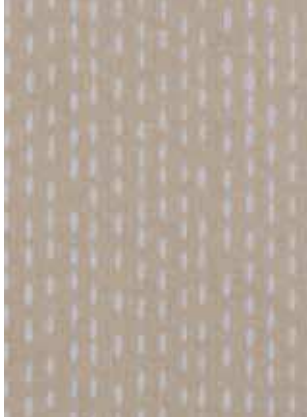


0736 - **Rice** Champagne



0728 - **Corner** Offwhite



6273 - **Uni** White

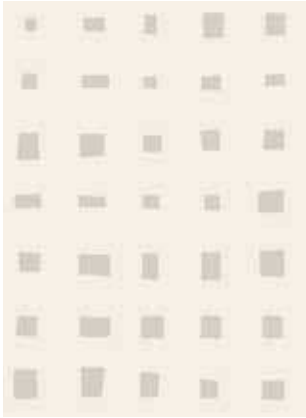

0755 - **Kubes** White




0763 - **Rice** Greige



0745 - **Nest** Metal




0737 - **Rice** Souris




6271 - **Uni** Grey



0729 - **Corner** Metal

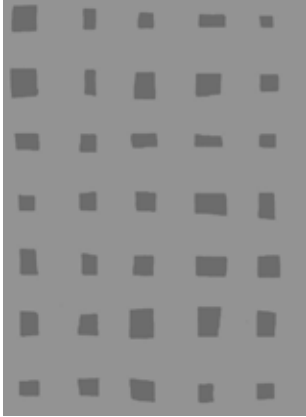

0753 - **Kubes** Grey

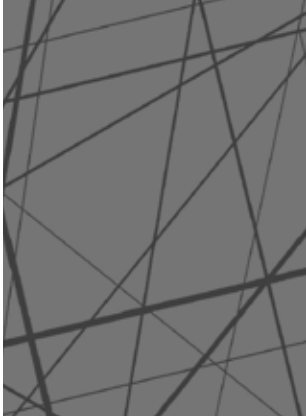

0746 - **Nest** Black



0778 - **Uni** Anthracite




0744 - **Stars** Anthracite


TARALAY IMPRESSION & UNI




0762 - Rice Brown



6265 - Uni Brown

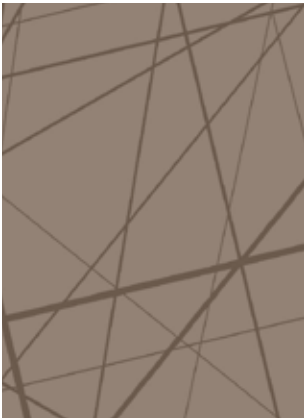

0765 - Nest Taupe

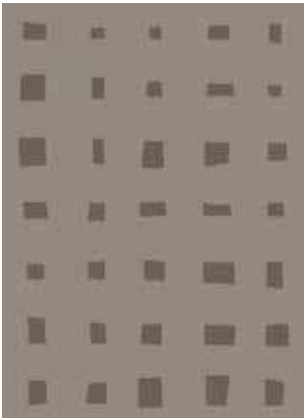


0751 - Kubes Taupe



0741 - Corner Tomette




6270 - Uni Tomette

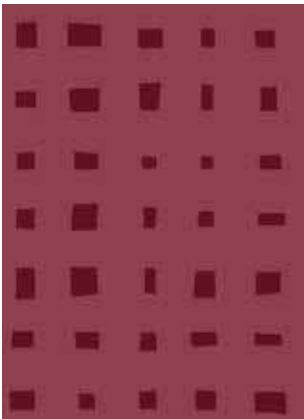


0748 - Kubes Burgundy




0757 - Rice Coquelicot

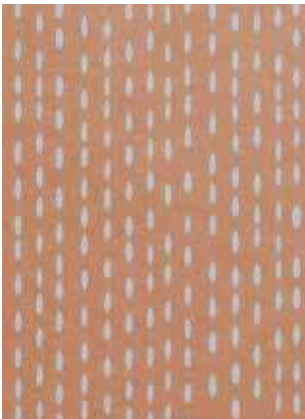

0738 - Rice Copper

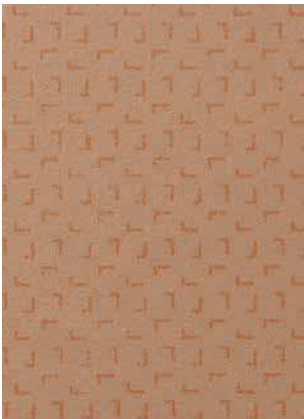

0733 - Corner Copper

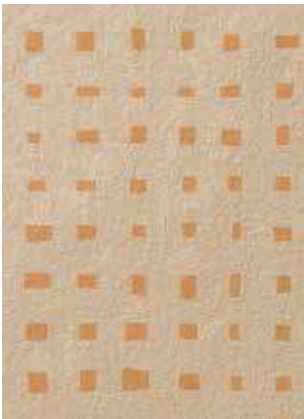

0752 - Kubes Gold



0759 - Rice Mustard



6268 - Uni Sun



0750 - Kubes Sun



6269 - Uni Orange



0764 - Stars Orange




0739 - Corner Anis



6263 - Uni Anis



0735 - Rice Light Green




6262 - Uni Turquoise



0740 - Corner Turquoise




0747 - Kubes Olive




6264 - Uni Olive



0758 - Rice Sea

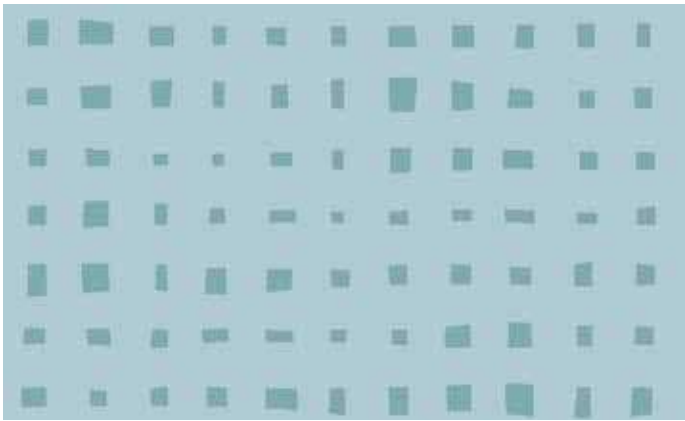


0749 - Kubes Sky

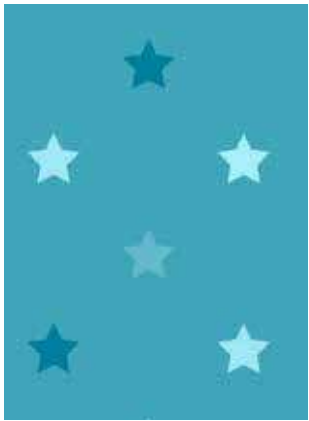


0743 - Stars Baltique




0754 - Kubes Blue



6261 - Uni Blue

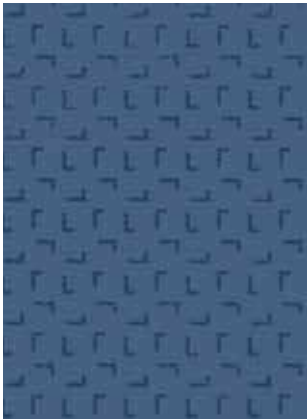

0732 - Corner Dark Blue



6260 - Uni Dark Blue

TARALAY IMPRESSION		TARALAY UNI
COMPACT	COMFORT	COMFORT
Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Uni

DESCRIPTION

Total thickness	EN ISO 24346 [EN 428]	mm	2.00	3.35	3.00
	ASTM F386-02	inch	0.08	0.13	0.1
Thickness of wearlayer	EN ISO 24340 [EN 429]	mm	0.70	0.65	0.65
	ASTM F410-02	inch	0.028	0.026	0.026
Weight	EN ISO 23997 [EN 430]	g/sq.m	2635	2825	2300
Width/length of sheet	EN ISO 24341 [EN 426]	cm / lm	200 / 25	200 / 25	200 / 25
	-	feet - inch	6'6" / 82'	6'6" / 82'	6'6" / 82'

CLASSIFICATION

Norm/product specification	-	-	EN ISO 10582 [EN 649]	EN 651	EN 651
European classification	EN ISO 10874 [EN 685]	class	34 - 43	34 - 42	34 - 42
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance wet: ramp test with oil ⁽¹⁾	DIN 51 130	class	R10	R10	R10

PERFORMANCES

Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T	T
Type binder content	EN ISO 10582	Type	I	-	-
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation [requirement]	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.20	≤ 0.20
Residual indentation [average measured value]	-	mm	≈ 0.03	≈ 0.08	≈ 0.11
Impact sound insulation	EN ISO 717-2	dB	8	19	17
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK	OK	OK
Thermal conductivity	EN ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Protecsol® 2	Protecsol® 2	Protecsol®
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK	OK	OK
Anti-bacterial activity [E. coli - S. aureus - MRSA] ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth

ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m³	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®

CE marking

CE	EN 14041	-			
		-			

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges
(2) The implementation of an effective cleaning regime is the best defence against infection

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Technical data sheets and product descriptions for **TARALAY IMPRESSION COMPACT and COMFORT PLUS** (0.9mm wearlayer) available in the Taralay Impression & Uni product guide.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/04/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

TARALAY IMPRESSION & UNI, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION
100% REACH compliant



RECYCLABILITY
100 %



INDOOR AIR QUALITY
100 times lower than norm requirements (TVOC < 10ug/m³ after 28 days)



LCA
Eco-designed according to a product-specific life cycle analysis



WELLNESS
Anti slip R10
Comfort version:
Walking comfort <65dB (best certification) and impact sound insulation - 19 dB

Be CONNECTED!







www.gerflor.com



“my
Reference,”

CREATION 55

Gerflor
theflooringgroup

	 CREATION 55	 CREATION 55 CLIC	 CREATION 55 LOOSELAY	 SKIRTINGS DESIGN MATCHING
AMADOR	■	■	■	■
ARENA	■	■	■	■
BALLERINA	■	■	■	■
CARMEL	■	■	■	■
HONEY OAK	■	■	■	■
LONG BOARD	■	■	■	■
MALUA BAY	■	■	■	■
NORVEGIAN STONE	■	■	■	■
PARKER STATION	■	■	■	■
RANCH	■	■	■	■
SWISS OAK GOLDEN	■	■	■	■
SWISS OAK PERLE	■	■	■	■
TWIST	■	■	■	■
AMARANTE	■	■	■	■
ASPEN	■	■	■	■
BLOOM GREY	■	■	■	■
BLOOM TAUPE	■	■	■	■
BLOOM UNI GREY	■	■	■	■
BLOOM UNI TAUPE	■	■	■	■
BOSTONIAN OAK	■	■	■	■
BOSTONIAN OAK BEIGE	■	■	■	■
BOSTONIAN OAK GREY	■	■	■	■
BOSTONIAN OAK HONEY	■	■	■	■
BROWNIE	■	■	■	■
BUFFALO	■	■	■	■
CAMBRIDGE	■	■	■	■
CARRARE	■	■	■	■
CEDAR BROWN	■	■	■	■
CEDAR PURE	■	■	■	■
DURANGO TAUPE	■	■	■	■
ERAMOSA BEIGE	■	■	■	■
MICHIGAN	■	■	■	■
OXFORD	■	■	■	■
PAINT WOOD TAUPE	■	■	■	■
QUARTET	■	■	■	■
QUARTET FAUVE	■	■	■	■
REGGIA IVORY	■	■	■	■
RIVERSIDE	■	■	■	■
RUST CORTEN	■	■	■	■
RUSTIC OAK	■	■	■	■
SILVER CITY	■	■	■	■
STACATTO	■	■	■	■
STRIPE OAK HONEY	■	■	■	■
STRIPE OAK ICE	■	■	■	■
SWISS OAK BEIGE	■	■	■	■
SWISS OAK CASHMERE	■	■	■	■
SWISS OAK SMOKED	■	■	■	■
WHITE LIME	■	■	■	■
PONTO CRUZ CITY	■	■	■	■
PONTO CRUZ NAVY	■	■	■	■
CHEVRON BUCKWHEAT	■	■	■	■
CHEVRON HURRICANE	■	■	■	■
CHEVRON MOKA	■	■	■	■
MANSFIELD LIGHT	■	■	■	■
MANSFIELD NATURAL	■	■	■	■
NORTHWOOD MACHIATTO	■	■	■	■
NORTHWOOD MOKACCINO	■	■	■	■
QUARTET HONEY	■	■	■	■
REGGIA TAUPE	■	■	■	■
ROYAL OAK BLOND	■	■	■	■
ROYAL OAK COFFEE	■	■	■	■
RUST METAL	■	■	■	■
VINTAGE OAK	■	■	■	■

■ : Available

LVR on [gerflor.com](https://www.gerflor.com)

CREATION 55

CREATION 55 CLIC



5X MORE RESISTANT

30% FASTER

CREATION 55 LOOSELAY



CREATION 55




For more information please refer to Gerflor's installation guidelines

CREATION 55 LOOSELAY


500 x 500 mm


229 x 1220 mm



PUR+ MATT



Easy
maintenance

4D DESIGN

MATT SURFACE



Natural look

CRISTAL WEAR LAYER




High definition
design & color

STRUCTURED EMBOSS



Ultra realistic surface

MIX&MATCH DESIGNS



Easy mix&match of
designs & formats

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE



The best stability
Fiber glass inside




Renovation ceramic
4 mm joint



No adhesive up
to 30 m²

GRIP-WAVE BACKLAYER

ANTI-SKID BACKING



Super strong suction
to the subfloor

Air circulation:
better acoustic

Humidity circulation:
moisture resistance



Easily removable:
renovation

100% REACH
Phthalate free
(except recycled content)



100% RECYCLABLE
35% recycled content



**TVOC emissions below
detection level**
(TVOC < 10µg after 28 days)
No formaldehyde



For more information please refer to Gerflor's installation guidelines

CREATION 55



610 x 610 mm



457 x 914 mm




152 x 762 mm



184 x 1219 mm



230 x 1500 mm



PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE



Natural look

CRISTAL WEAR LAYER




High definition design & color

STRUCTURED EMOSS & BEVEL



Ultra realistic surface

MIX&MATCH DESIGNS



Easy mix&match of designs & formats

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE



The best stability
Fiber glass inside*

*Creation 55 Trend

DIAMOND BACKLAYER


BODY & STRENGTH



Easy handling

BACK EMOSS

Better subfloor
adhesion



Easy positioning

100% REACH
Phthalate free
(except recycled content)



100% RECYCLABLE
35% recycled content



**TVOC emissions below
detection level**
(TVOC < 10ug after 28 days)
No formaldehyde



For more information please refer to Gerflor's installation guidelines



SWISS OAK BEIGE



SWISS OAK GOLDEN



SWISS OAK CASHMERE



SWISS OAK PEARL



SWISS OAK SMOKED

Swiss Oak Collection



SWISS OAK GOLDEN 0796



184 x 1219
230 x 1500



214 x 1239
242 x 1461



229 x 1220



SWISS OAK BEIGE 0848



184 x 1219
230 x 1500
152 x 762



214 x 1239
242 x 1461



SWISS OAK CASHMERE 0795



184 x 1219
230 x 1500



214 x 1239
242 x 1461



SWISS OAK PEARL 0846



184 x 1219
230 x 1500



214 x 1239
242 x 1461



229 x 1220



SWISS OAK SMOKED 0847



184 x 1219
230 x 1500



214 x 1239
242 x 1461



Bostonian Oak Collection



BOSTONIAN OAK HONEY 0851

 184 x 1219
230 x 1500

 214 x 1239
242 x 1461



BOSTONIAN OAK 0871

 184 x 1219

 214 x 1239



BOSTONIAN OAK BEIGE 0853

 184 x 1219
230 x 1500

 214 x 1239
242 x 1461



BOSTONIAN OAK GREY 0855

 184 x 1219
230 x 1500

 214 x 1239
242 x 1461





BOSTONIAN OAK HONEY



BOSTONIAN OAK



BOSTONIAN OAK BEIGE



BOSTONIAN OAK GREY



RANCH



VINTAGE OAK



AMADOR



OXFORD



VINTAGE OAK 0426

 184 x 1219



RANCH 0456

 184 x 1219
230 x 1500

 214 x 1239
242 x 1461

 229 x 1220



AMADOR 0447

 184 x 1219

 214 x 1239

 229 x 1220



OXFORD 0061

 184 x 1219

 214 x 1239





CHEVRON MOKA 0810



184 x 1219



CHEVRON BUCKWHEAT 0811



184 x 1219



CHEVRON HURRICANE 0809



184 x 1219





CHEVRON MOKA



CHEVRON HURRICANE



CHEVRON BUCKWHEAT



STRIPE OAK ICE



MANSFIELD LIGHT



ARENA



STRIPE OAK ICE 0858

 184 x 1219 |  214 x 1239 



MANSFIELD LIGHT 0068

 184 x 1219 



ARENA 0060

 184 x 1219 |  214 x 1239 |  229 x 1220 



MALUA BAY 0448

 184 x 1219

 214 x 1239

 229 x 1220



WHITE LIME 0584

 184 x 1219

 214 x 1239



PAINT WOOD TAUPE 0856

 184 x 1219

 214 x 1239





MALUA BAY



WHITE LIME




PAINT WOOD TAUPE



MANDFIELD NATURAL



LONG BOARD

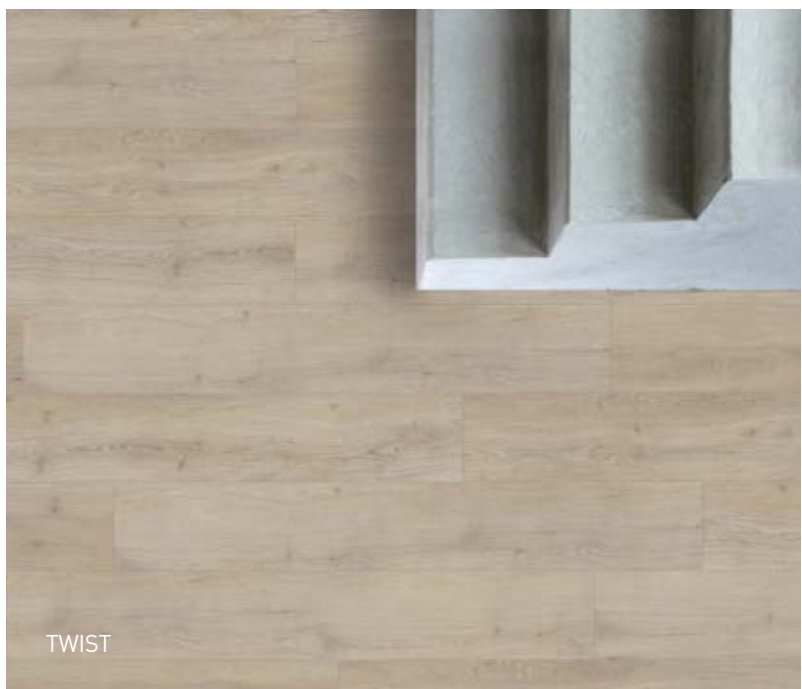

TWIST



HONEY OAK



MANSFIELD NATURAL 0069

 184 x 1219



TWIST 0504

 184 x 1219

 214 x 1239

 229 x 1220



LONG BOARD 0455

 184 x 1219

 214 x 1239

 229 x 1220



HONEY OAK 0441

 184 x 1219

 214 x 1239

 229 x 1220





CEDAR PURE 0849

 230 x 1500

 242 x 1461



CEDAR BROWN 0850

 230 x 1500

 242 x 1461





CEDAR PURE



CEDAR BROWN



CEDAR PURE





NORTHWOOD MACCHIATO 0816

 184 x 1219



NORTHWOOD MOKACCINO 0817

 184 x 1219



ROYAL OAK BLOND 0812

 184 x 1219



ROYAL OAK COFFEE 0740

 184 x 1219





CAMBRIDGE 0465

 184 x 1219

|  214 x 1239



QUARTET HONEY 0870

 184 x 1219



BALLERINA 0347

 184 x 1219 / 152 x 762

|  214 x 1239

|  229 x 1220



QUARTET FAUVE 0859

 184 x 1219

|  214 x 1239





CAMBRIDGE



BALLERINA



QUARTET FAUVE



QUARTET HONEY



QUARTET



STRIPE OAK HONEY



AMARANTE



RUSTIC OAK



QUARTET 0503

184 x 121.9
152 x 762

214 x 1239



AMARANTE 0579

184 x 1219

214 x 1239



RUSTIC OAK 0445

184 x 1219

214 x 1239



STRIPE OAK HONEY 0857

184 x 1219

214 x 1239





MICHIGAN 0461

 184 x 1219

 214 x 1239



BROWNIE 0459

 184 x 1219

 214 x 1239



BUFFALO 0457

 184 x 1219

 214 x 1239



ASPEN 0458

 184 x 1219

 214 x 1239





BROWNIE



MICHIGAN



BUFFALO



ASPEN



RUST CORTEN



RUST METAL



DURANGO TAUPE



RUST CORTEN 0095

 457 x 914 |  391 x 729 




RUST METAL 0094

 457 x 914 



DURANGO TAUPE 0751  610 x 610 |  391 x 729 

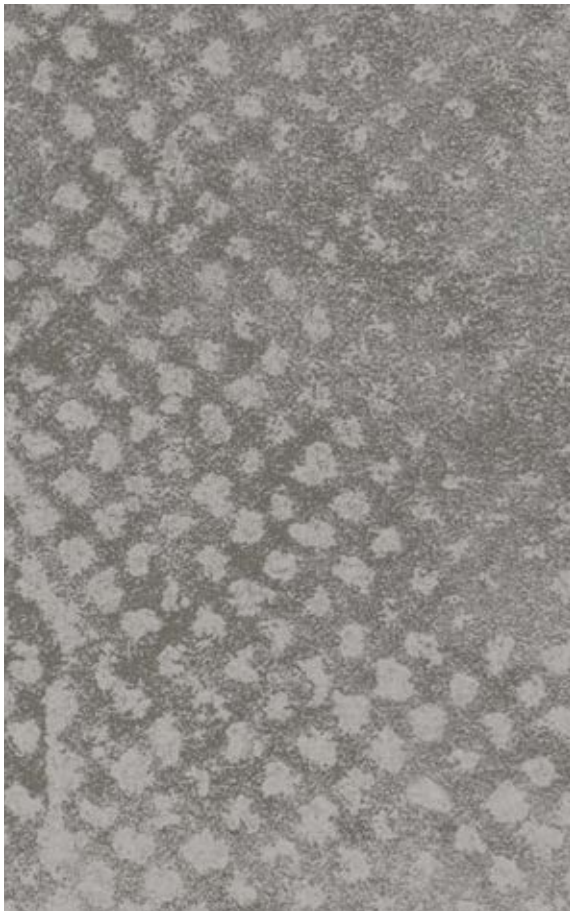

STACCATO 0476  610 x 610 |  391 x 729 



SILVER CITY 0373  610 x 610 |  391 x 729 



PARKER STATION 0374 
 610 x 610 |  391 x 729 |  500 x 500



NORVEGIAN STONE 0860 
 457 x 914 |  391 x 729 |  500 x 500



PARKER STATION



STACCATO



SILVER CITY



NORVEGIAN STONE




REGGIA TAUPE



CARMEL



RIVERSIDE

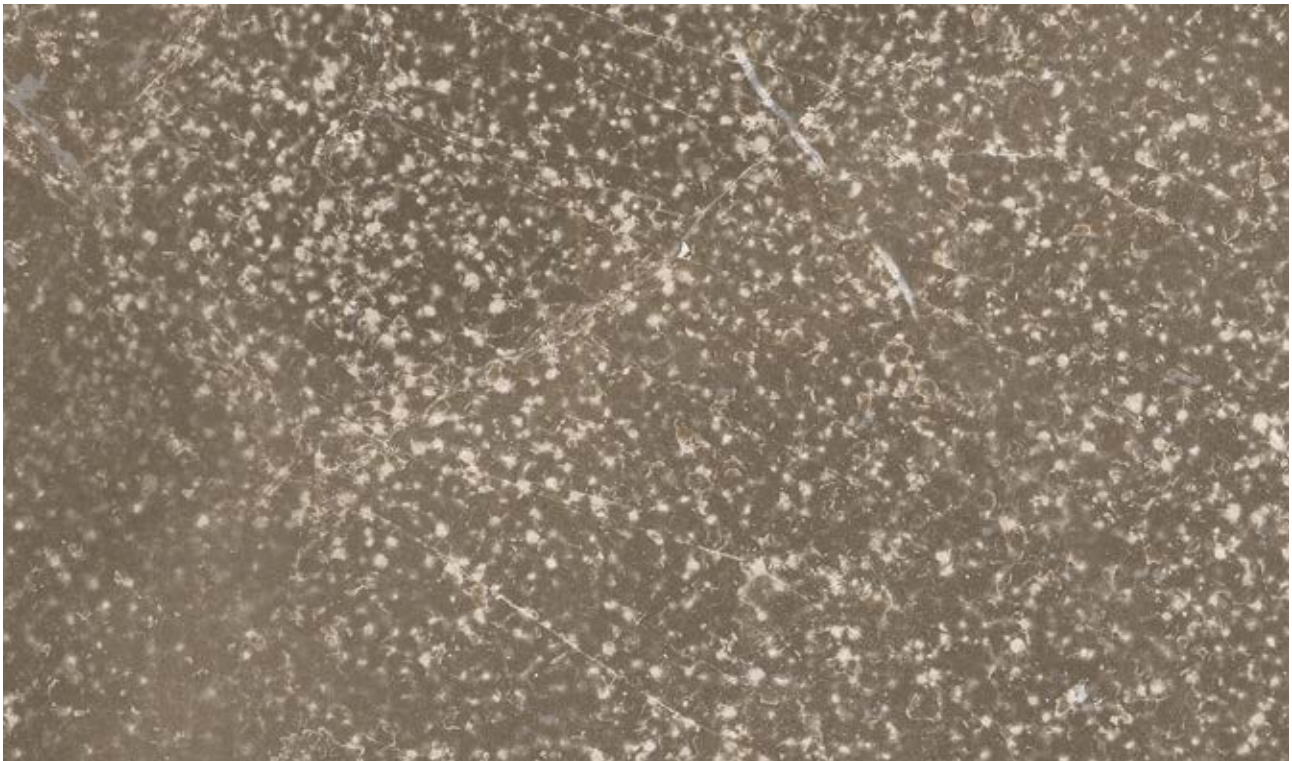


REGGIA TAUPE 0862

457 x 914



CARMEL 0618

457 x 914 | 391 x 729 | 500 x 500

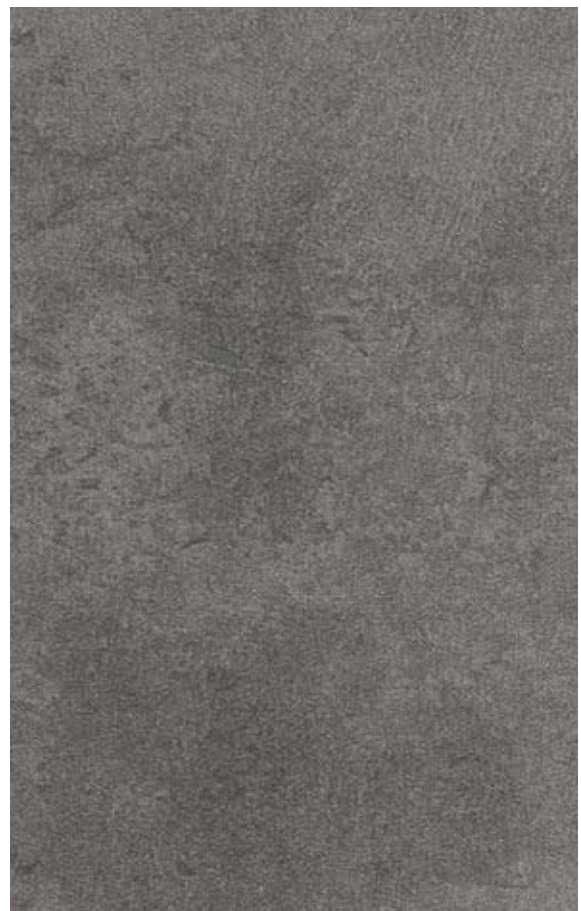

RIVERSIDE 0436

610 x 610 | 391 x 729






PONTO CRUZ NAVY 0876



610 x 610
152 x 762



500 x 500

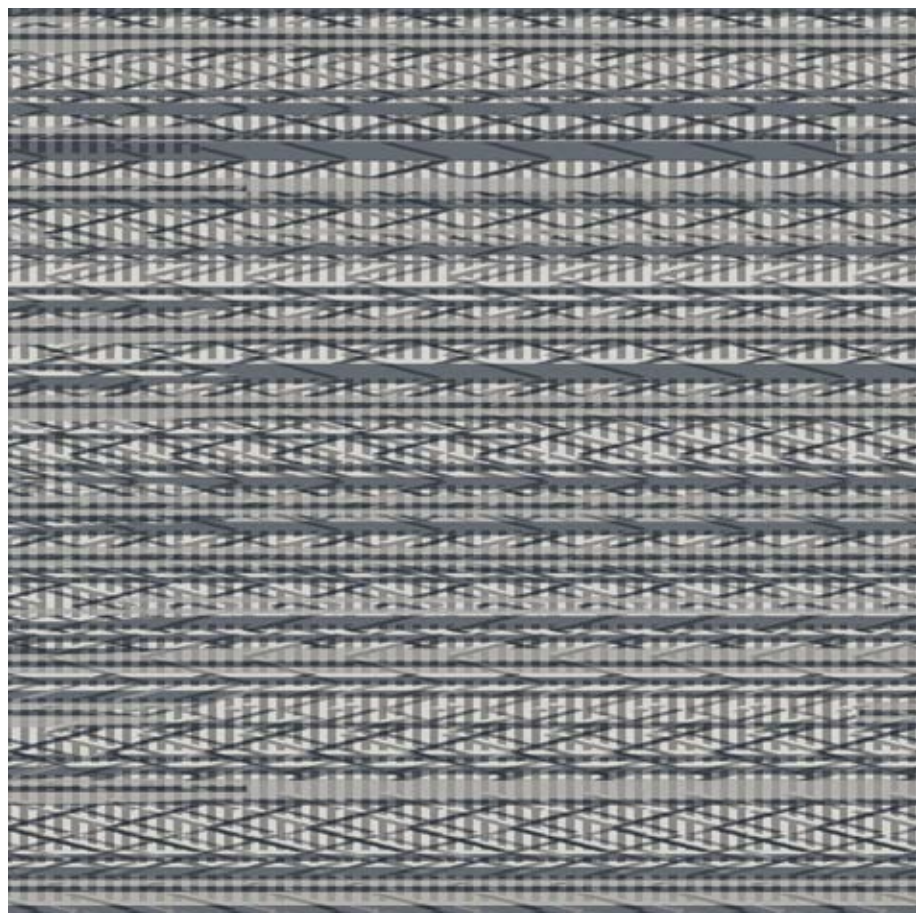

PONTO CRUZ CITY 0878



610 x 610
152 x 762



500 x 500






PONTO CRUZ NAVY



PONTO CRUZ NAVY & CITY




PONTO CRUZ CITY

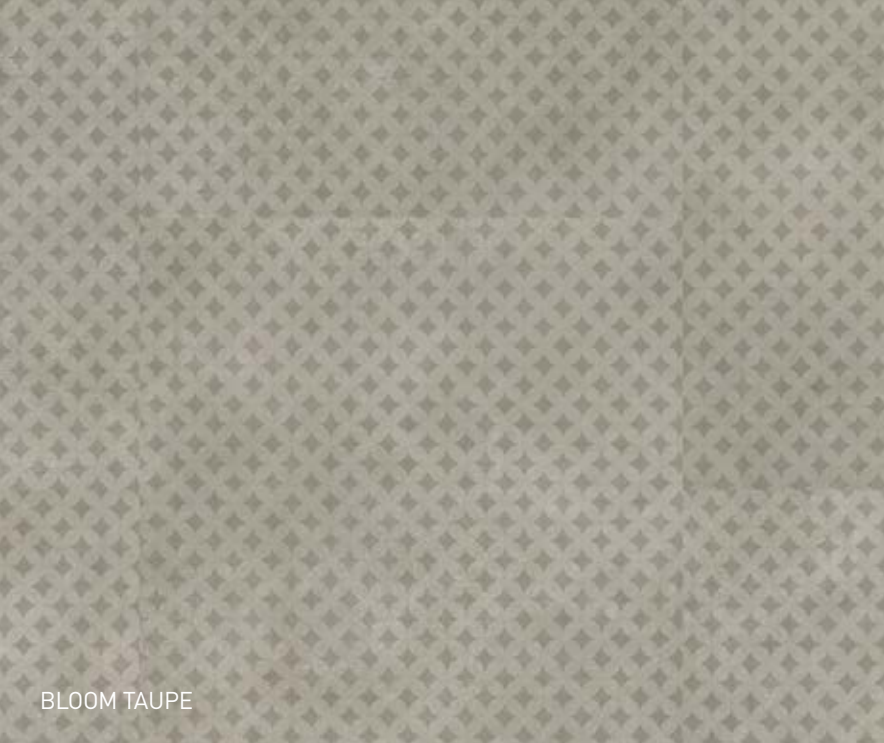

BLOOM TAUPE



BLOOM TAUPE / BLOOM UNI TAUPE

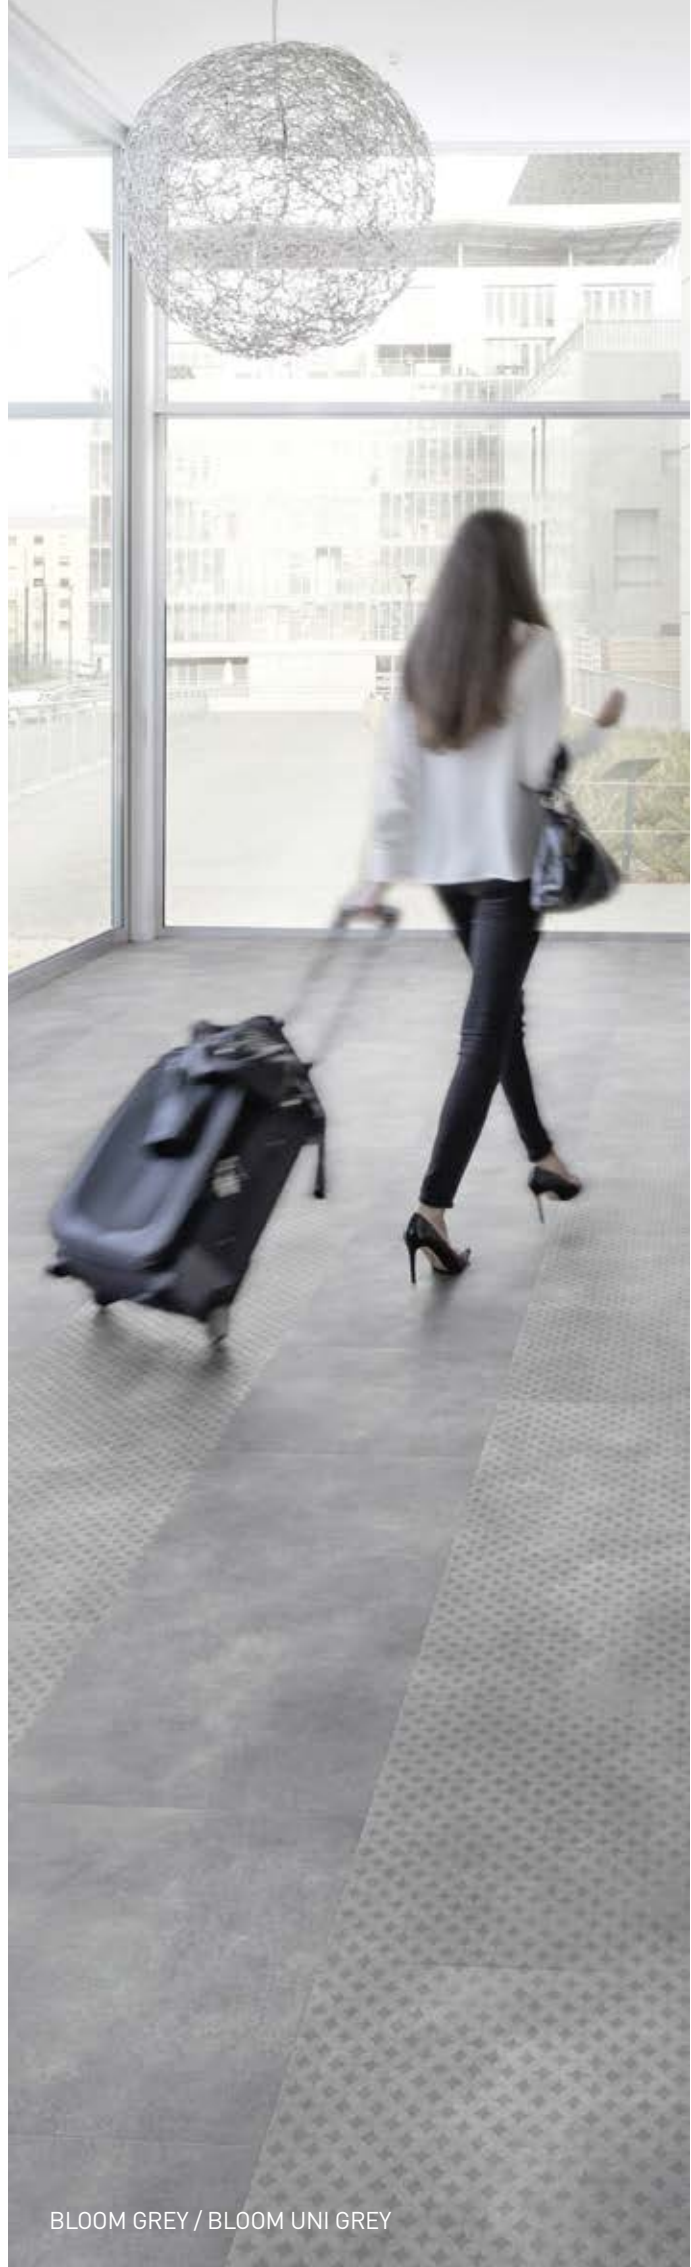

BLOOM GREY / BLOOM UNI GREY



BLOOM TAUPE 0866

 610 x 610 |  391 x 729



BLOOM UNI TAUPE 0868

 610 x 610 |  391 x 729



BLOOM GREY 0867

 610 x 610 |  391 x 729



BLOOM UNI GREY 0869

 610 x 610 |  391 x 729






CARRARE 0744



457 x 914



391 x 729

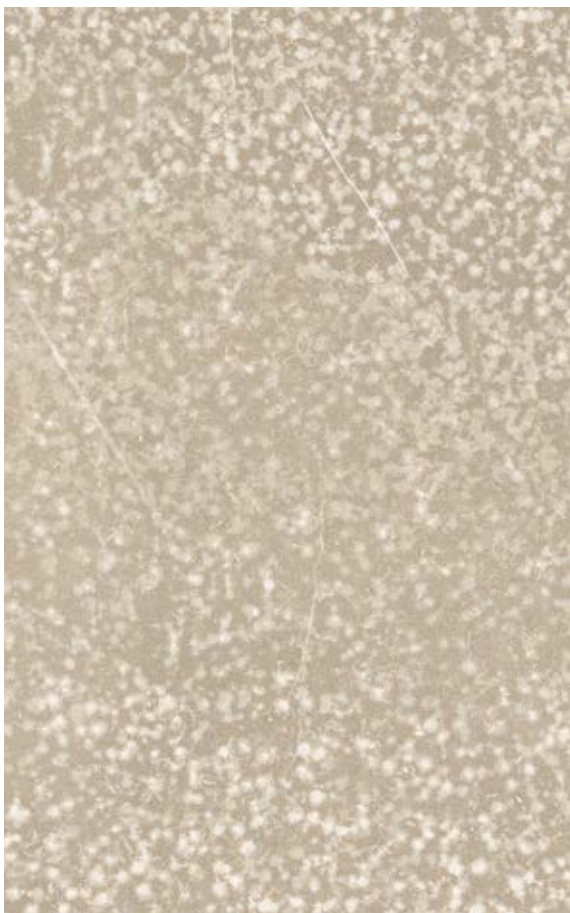

REGGIA IVORY 0861



457 x 914



391 x 729



ERAMOSA BEIGE 0863



457 x 914



391 x 729





CARRARE



REGGIA IVORY



ERAMOSA BEIGE

EXCLUSIVE EMBOSSES FOR ENHANCED DESIGNS
SURFACES GRAINÉES POUR UNE MATIÈRE TRÈS RÉALISTE
VERSCHIEDENE EXKLUSIVE OBERFLÄCHENPRÄGUNGEN
FÜR NOCH REALISTISCHERE DESIGNS



BRUSHED



ROYAL OAK




SAW EFFECT




NATURAL



CHEVRON*

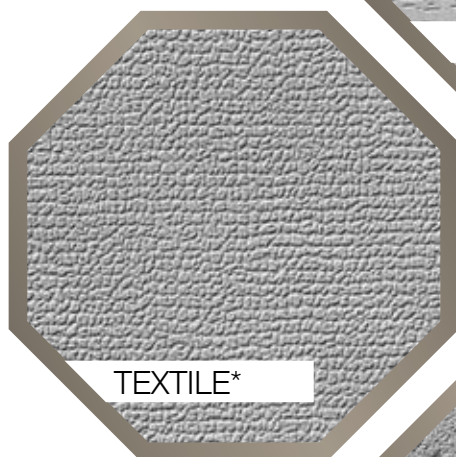


TEXTILE*

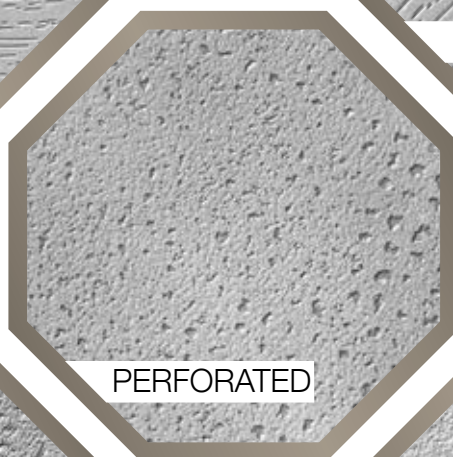

PERFORATED



HAMMERED

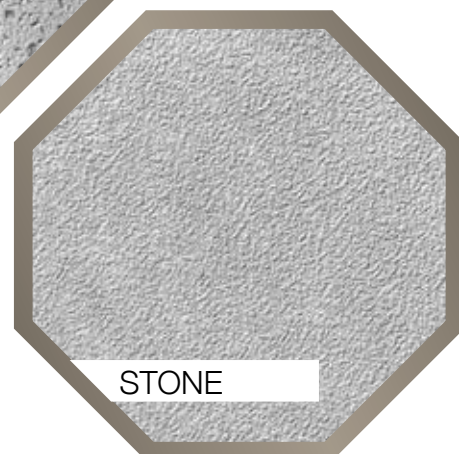

STONE

			CREATION 55 GLUE DOWN	CREATION 55 CLIC	CREATION 55 LOOSELAY
COLOR DESIGN	CODE	EMBOSES / GRAINS / PRÄGUNGEN			
AMADOR	0447	SAW EFFECT	•	•	•
ARENA	0060	SAW EFFECT	•	•	•
BALLERINA	0347	NATURAL	•	•	•
CARMEL	0618	HAMMERED	•	•	•
HONEY OAK	0441	NATURAL	•	•	•
LONG BOARD	0455	BRUSHED	•	•	•
MALUA BAY	0448	BRUSHED	•	•	•
NORVEGIAN STONE	0860	HAMMERED	•	•	•
PARKER STATION	0374	HAMMERED	•	•	•
RANCH	0456	BRUSHED	•	•	•
SWISS OAK GOLDEN	0796	NATURAL	•	•	•
SWISS OAK PEARL	0846	NATURAL	•	•	•
TWIST	0504	NATURAL	•	•	•
AMARANTE	0579	BRUSHED	•	•	
ASPEN	0458	BRUSHED	•	•	
BLOOM GREY	0867	HAMMERED	•	•	
BLOOM TAUPE	0866	HAMMERED	•	•	
BLOOM UNI GREY	0869	HAMMERED	•	•	
BLOOM UNI TAUPE	0868	HAMMERED	•	•	
BOSTONIAN OAK	0871	NATURAL	•	•	
BOSTONIAN OAK BEIGE	0853	NATURAL	•	•	
BOSTONIAN OAK GREY	0855	NATURAL	•	•	
BOSTONIAN OAK HONEY	0851	NATURAL	•	•	
BROWNIE	0459	NATURAL	•	•	
BUFFALO	0457	BRUSHED	•	•	
CAMBRIDGE	0465	NATURAL	•	•	
CARRARE	0744	STONE	•	•	
CEDAR BROWN	0850	NATURAL	•	•	
CEDAR PURE	0849	NATURAL	•	•	
DURANGO TAUPE	0751	HAMMERED	•	•	
ERAMOSA BEIGE	0863	NATURAL	•	•	
MICHIGAN	0461	BRUSHED	•	•	
OXFORD	0061	BRUSHED	•	•	
PAINT WOOD TAUPE	0856	BRUSHED	•	•	
QUARTET	0503	NATURAL	•	•	
QUARTET FAUVE	0859	NATURAL	•	•	
REGGIA IVORY	0861	STONE	•	•	
RIVERSIDE	0436	HAMMERED	•	•	
RUST CORTEN	0095	PERFORATED	•	•	
RUSTIC OAK	0445	BRUSHED	•	•	
SILVER CITY	0373	HAMMERED	•	•	
STACCATO	0476	PERFORATED	•	•	
STRIPE OAK HONEY	0857	NATURAL	•	•	
STRIPE OAK ICE	0858	NATURAL	•	•	
SWISS OAK BEIGE	0848	NATURAL	•	•	
SWISS OAK CASHMERE	0795	NATURAL	•	•	
SWISS OAK SMOKED	0847	NATURAL	•	•	
WHITE LIME	0584	SAW EFFECT	•	•	
PONTO CRUZ CITY*	0878	TEXTILE	•		•
PONTO CRUZ NAVY*	0876	TEXTILE	•		•
CHEVRON BUCKWHEAT*	0811	CHEVRON	•		
CHEVRON HURRICANE*	0809	CHEVRON	•		
CHEVRON MOKA*	0810	CHEVRON	•		
MANSFIELD LIGHT	0068	BRUSHED	•		
MANSFIELD NATURAL	0069	BRUSHED	•		
NORTH WOOD MACCHIATO	0816	BRUSHED	•		
NORTH WOOD MOKACCINO	0817	BRUSHED	•		
QUARTET HONEY	0870	NATURAL	•		
REGGIA TAUPE	0862	STONE	•		
ROYAL OAK BLOND	0812	ROYAL OAK	•		
ROYAL OAK COFFEE	0740	ROYAL OAK	•		
RUST METAL	0094	PERFORATED	•		
VINTAGE OAK	0426	BRUSHED	•		

•: Available / Disponible / Verfügbar



			CREATION 55		CREATION 55 LOOSELAY	CREATION 55 CLIC
			DESIGN	TREND		
DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE						
Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Espessura total / Spessore totale	EN ISO 24346	mm	2.50	2.50	4.50	5.00
	ASTM F386-02	inch	0.10	0.10	0.18	0.20
Thickness of the wearlayer / Dicke der Nuttschicht / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura	EN ISO 24340	mm	0.55	0.55	0.55	0.55
	ASTM F410-02	inch	0.02	0.02	0.02	0.02
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Peso	EN ISO 23997	g/m²	4410	3850	7500	8230
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensione	ISO 24342	mm	184x1219 / 230x1500 152x762 457x914 / 610x610	184x1219 / 230x1500 152x762 457x914 / 610x610	229x1220 500x500	214x1239 / 242x1461 391x729
	ASTM F 536	inch	7.25"x48" / 9"x59" 6"x30" / 18"x36" / 24"x24"	7.25"x48" / 9"x59" 6"x30" / 18"x36" / 24"x24"	9"x48" 19.7"x19.7"	8.4"x48.7" / 9.5"x57.5" 15.3"x28.7"

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme / Spécification produit / Normas / Normas / Norma prodotto	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582	EN ISO 10582
	ASTM F 1700-04	-	Class III Type B	Class III Type B	-	Class III Type B
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea	EN ISO 10874	Class	33 - 42	33 - 42	33 - 42	33 - 42
Classement UPEC	-	-	U3P3E2C2	U3P3E2C2	-	Pour pose dans les locaux classés U3P3E1/2C2
Certification  UPEC	QB 30	n°	783/356-004.1	355-002.1	-	-
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco	EN 13 501-1	Class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static Electrical Propensity / Begehaufadung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento elettrostatico / Resistenza elettrica	EN 1815	kV	< 2	< 2	< 2	< 2
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida ⁽¹⁾	DIN 51130/BGR 181	Class	R10	R10	R10	R10

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione	EN 660.2	mm³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear Group / Verschleißgruppe / Groep slijtvastheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione	QB 30	group	T	T	T	T
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante	ISO 10582	group	I	I	I	I
Dimensional stability (norm) / Maßstabilität (norm) / Maatvastheid (norm) / Stabilité dimensionnelle (norme) / Estabilidad Dimensional (Exigencia) / Estabilidade dimensional (normalização) / Stabilità dimensionale (requisito normativo)	EN ISO 23999	%	≤ 0.25	≤ 0.25	≤ 0.15	≤ 0.15
Dimensional stability (average measured value) / Maßstabilität (Durchschnittswert) / Stabilité dimensionnelle (valeur moyenne mesurée) / Maatvastheid (gemeten gemiddelde waarde) / Estabilidad Dimensional (Valor medido) / Estabilidade Dimensional (Valor medido) / Stabilità dimensionale (rilevata)	-	%	≤ 0.10	≤ 0.10	≤ 0.05	≤ 0.05
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Impronta	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico	EN ISO 717-2	dB	4	4	7	4
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar	NF S 31074	dB	77	77	73	78
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed [Type W]	ISO 4918	-	OK	OK	OK	OK
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Condutividade térmica / Resistenza termica / Värmeledningsmotstånd / Varmemotstånd	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandeling / Traitement de surface / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie	-	-	PUR+ Matt	PUR+ Matt	PUR+ Matt	PUR+ Matt
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestendigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici ⁽²⁾	EN ISO 26987	-	OK	OK	OK	OK

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITE DE L'AIR INTERIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m³	< 10	< 10	< 10	< 10
Certification / Zeugnis / Certification / Certificado / Certificação	-	-	-	Floorscore®	-	Floorscore®

CE MARKING / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

	EN 14041	-	   
--	----------	---	---

(1) Ramp test with oil / Schiefe Ebene / Plan incliné avec huile

(2) Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.

CREATION, NO FORMALDEHYDE, BETTER INDOOR AIR QUALITY

						
COMPOSITION 100% REACH Phthalate Free (except recycled content)	INDOOR AIR QUALITY TVOC below detection level No Formaldehyde emission	RECYCLED CONTENT Glue Down: 35% Looselay: 35% Clic: 55%	RECYCLABILITY 100%	INSTALLATION Clic: Adhesive free	LCA New process: Lowest Carbon Footprint CO ₂ emissions/sqm 10 times lower than standard process	WELLNESS Walking noise reduction: -10dB vs laminate

IMPORTANT: The information contained in this document is valid from 01/08/2019 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.