

A Cut Above M0833



7274010 AMBER



7274011 CARNATION



7274012 LEATHER



7274013 SIENNA



7274014 PACIFIC

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	888 g/m² ± 5%
Pile Height	4,2 mm ± 15% / ~ 10%
Total Thickness	9,1 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-5BAEEB69
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3,86 kg CO ₂ eq /m²



Interface*Hospitality*

City of Angels



8130002 DUSK



8130003 MIDNIGHT




8130001 DAWN


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1182 g/m ² ± 5%
Pile Height	4.5 mm ± 15% / ~ 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _i)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 7FBFD73A
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4.60 kg CO ₂ eq / m ²




Collins Cottage



8152009 HOUND B & W



8152004 HOUND BLACK



8152003 HOUND CHARCOAL


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m ² ± 5%
Pile Height	3.9 mm + 15% / - 10%
Total Thickness	7.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - E5AE7AAC
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq / m ²




COLLINS COTTAGE - HOUND CHARCOAL
INSTALLED - HOUND CHARCOAL
LEVEL SET TEXTURED WOODGRAINS ANTIQU LIGHT OAK
INSTALLED - ASHLAR

Composure Collection

Composure

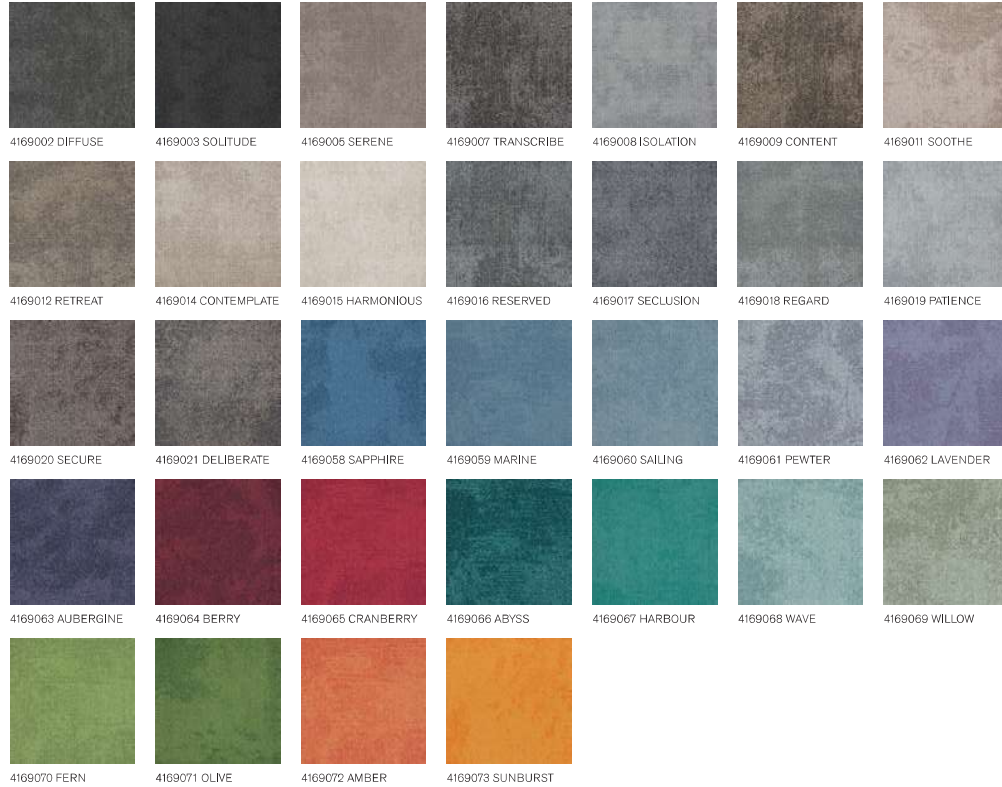

Backing	CQuest [®] Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	570 g/m ² ± 5%
Pile Height	2,6 mm ± 15% / - 10%
Total Thickness	6,0 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FE7272A5
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4,24 kg CO ₂ eq. /m ²

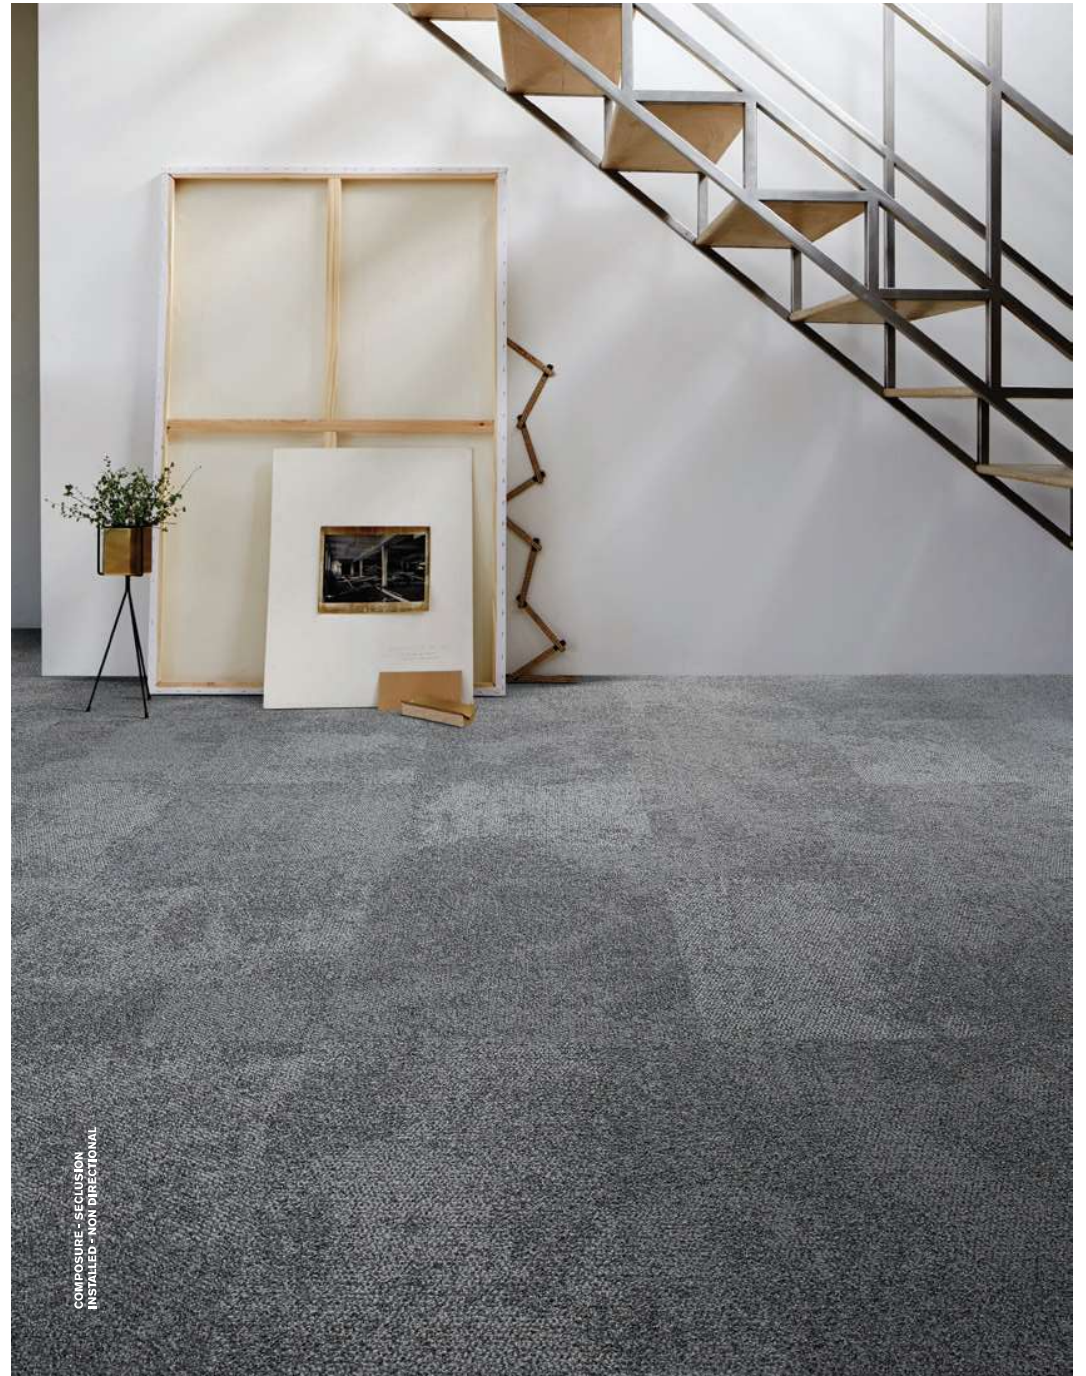

COMPOSURE - SECLUSION
INSTALLED - NOT DIRECTIONAL

Composure Collection

Composure Edge



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	665 g/m² ± 5%
Pile Height	3.0 mm ± 15% / ~ 10%
Total Thickness	6.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-6F2E721C
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.74 kg CO ₂ eq./m²



COMPOSURE EDGE - SAPPHIRE/DIFFUSE
WATER REPELLENT BY TITEL
COMPOSURE - SAPPHIRE & DIFFUSE
INSTALLED - NON DIRECTIONAL



Connected Ethos Collection

CE100

						
4314001 CONNECT	4314002 GAZE	4314003 EXPLORE	4314004 OBSERVE	4314005 EVOLVE	4314006 CONSIDER	4314007 EXPOSE
						
4314008 REVEAL	4314009 AWAKE	4314010 EMULATE	4314011 PERCEIVE	4314012 IDENTIFY	4314013 DISTINGUISH	4314014 SURVEY
						
4314015 CREATE	4314016 AFFIRM	4314017 CONTEND	4314018 CONFIRM	4314019 SUSTAIN	4314020 CAPTIVATE	4314021 ENCOUNTER
						
4314022 SEARCH	4314023 SHADE	4314024 UNCOVER	4314025 UNEARTH	4314026 BREATHE	4314027 EMBODY	4314028 ESCAPE
						
4314029 EMBARK	4314030 ENCHANT	4314031 EXIST	4314032 SCENIC			

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	624 g/m ² ± 5%
Pile Height	3.0 mm ± 15% / ~ 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≤ 2.4% (EN 986)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-5CESAAE2
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3.16 kg CO ₂ eq /m ²



CE100 - AFFIRM
INSTALLED - NON DIRECTIONAL

Connected Ethos Collection

CE200



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	747 g/m² ± 5%
Pile Height	4.0 mm ± 5%
Total Thickness	7.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≤ 2.4% (EN 986)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.29 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4C5EDE85
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	3.49 kg CO ₂ eq./m²



CE200 - CONSIDER/ESCAPE
NEXT TO DESIGNED BY TYLE
CE100 - CONSIDER & ESCAPE
LEVEL SET TEXTURED WOODGRAINS - ANTIQUE LIGHT OAK
INSTALLED - ASHLAR



Contemplation



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	580 g/m² ± 5%
Pile Height	3.3 mm ± 15% / ~ 10%
Total Thickness	6.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS- 1206E2B1
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.40 kg CO ₂ eq /m²



CONTEMPLATION - PRIMITIVE
INSTALLED - ASYLUM



Darning



9273019 ALMOND




9273018 SILVER



9273020 SAGE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m ² ± 5%
Pile Height	3.3 mm ± 15% / ~ 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-7DFFCB85
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3.12 kg CO ₂ eq./m ²




DARNING - SILVER
RECYCLED - ASHLAR

Decibel



9275001 B&W DECIBEL

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m² ± 5%
Pile Height	3.2 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-B0F94CD8
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.12 kg CO ₂ eq./m²



DECIBEL - B&W DECIBEL
INSTALLED - ASILES

Dolomite



4292001 DIAMOND




4292002 CRYSTAL




4292003 OBSIDIAN



4292004 GOLDEN BERYL




4292005 ROSE QUARTZ



4292006 AMBER



4292007 PEARL



4292008 MOONSTONE



4292009 AVENTURINE



4292010 MALACHITE



4292011 AZURITE



4292012 LAPIS LAZULI

Backing	COquest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	850 g/m ² ± 5%
Pile Height	3,9 mm ± 15% / ~ 10%
Total Thickness	6,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≤ 2,4% (EN 986)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - EACAFAB6
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3,76 kg CO ₂ eq. /m ²




-60%

Carbon Negative with
COquest™BioX backing option100%
Recycled Nylon

DOLOMITE - AZURITE
 INSTALLED - MONOCHROMATIC
 DRAWN LINES - SILVER
 INSTALLED - ASHLAR

Elevation III

						
4199001 COLLETTINO	4199002 BROCATELLO	4199003 PALISSANDRA	4199004 CIOCCOLATO	4199005 FIOR DI PESCO	4199006 CEPPO DI GRE	4199007 GRIGIO NILO
						
4199008 PORTORO	4199009 CARRARA	4199010 JURA	4199011 VALDEORRAS	4199012 NERO MAQUINA	4199013 BOTTICINO	4199014 ROMANO CLASSICO
						
4199015 CREMA LUNA	4199016 OPALE NATURALE	4199017 CIPOLLINO	4199018 AQUA MARINA	4199019 AZURO CIELO	4199020 ZIRCONA	

Backing	CQuest™Bio
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	360 g/m ² ± 5%
Total Thickness	4,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _p)	16 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 17E5CE5A
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	2,47 kg CO ₂ eq./m ²



ELEVATION III - CREMA LUNA
NO-VALLED - QUARTER TURN

Embodied Beauty™ Collection

Geisha Gather



9551001 LIMESTONE



9551002 TAUPE



9551003 ASH



9551004 INDIGO



9551005 COAL



9551006 JET

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	882 g/m ² ± 5%
Pile Height	4.8 mm + 15% / - 10%
Total Thickness	8.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 366ACBE
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq / m ²



GEISHA GATHER - INDIGO
PREMIER LINES - HARDWOOD
INSTALLED - ASH/LAR

Embodied Beauty™ Collection

Sashiko Stitch



9552001 FLINT



9552002 ASH



9552003 INDIGO



9552004 JET



9552005 POPPY



9552006 JADEITE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	712 g/m² ± 5%
Pile Height	3.1 mm ± 15% / ~ 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-6F85E829
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.01 kg CO ₂ eq./m²



SASHIKO STITCH - JET & ASH
INSTALLED - ASHUR

Embodied Beauty™ Collection

Shishu Stitch [-CO₂]



Backing	CQuest™BioX
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	407 g/m² ± 5%
Pile Height	2.0 mm ± 15% / ~ 10%
Total Thickness	5.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - C0E56A52
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	~0.30 kg CO ₂ eq. / m²



Embodied Beauty™ Collection

Simple Sash



9554001 FLINT



9554002 ALBA



9554003 ASH



9554004 INDIGO



9554005 COAL



9554006 JET

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	644 g/m ² ± 5%
Pile Height	3.1 mm ± 15% / ~ 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - CFADAB59
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	2.80 kg CO ₂ eq /m ²



SIMPLE SASH - ALBA
INSTALLED AS TILES

Embodied Beauty™ Collection

Tokyo Texture [-CO₂]



Backing	CQuest™BioX
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	407 g/m² ± 5%
Pile Height	2,4 mm ± 15% / ~ 10%
Total Thickness	6,0 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-317E24EF
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	~0,30 kg CO ₂ eq. / m²



TOKYO TEXTURE - ASH
INSTALLER: TERRACORDONE

Embodied Beauty™ Collection

Vintage Kimono



9556001 LIMESTONE



9556002 TAUPE



9556003 ASH



9556004 INDIGO



9556005 COAL



9556006 JET

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	882 g/m ² ± 5%
Pile Height	2.9 mm + 15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-95389414
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq / m ²



VINTAGE KIMONO - ASH & COAL
INSTALLED - 45114

Embodied Beauty™ Collection

Zen Stitch [-CO₂]



9557001 FLINT



9557004 TAUPE



9557005 ASH



9557006 INDIGO




9557007 COAL



9557009 JET

Backing	CQuest™BioX
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, contains recycled content
Pile Yarn Weight	407 g/m ² ± 5%
Pile Height	2,2 mm ± 15% / ~ 10%
Total Thickness	5,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - CDB3BF76
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	~0,30 kg CO ₂ eq. / m ²

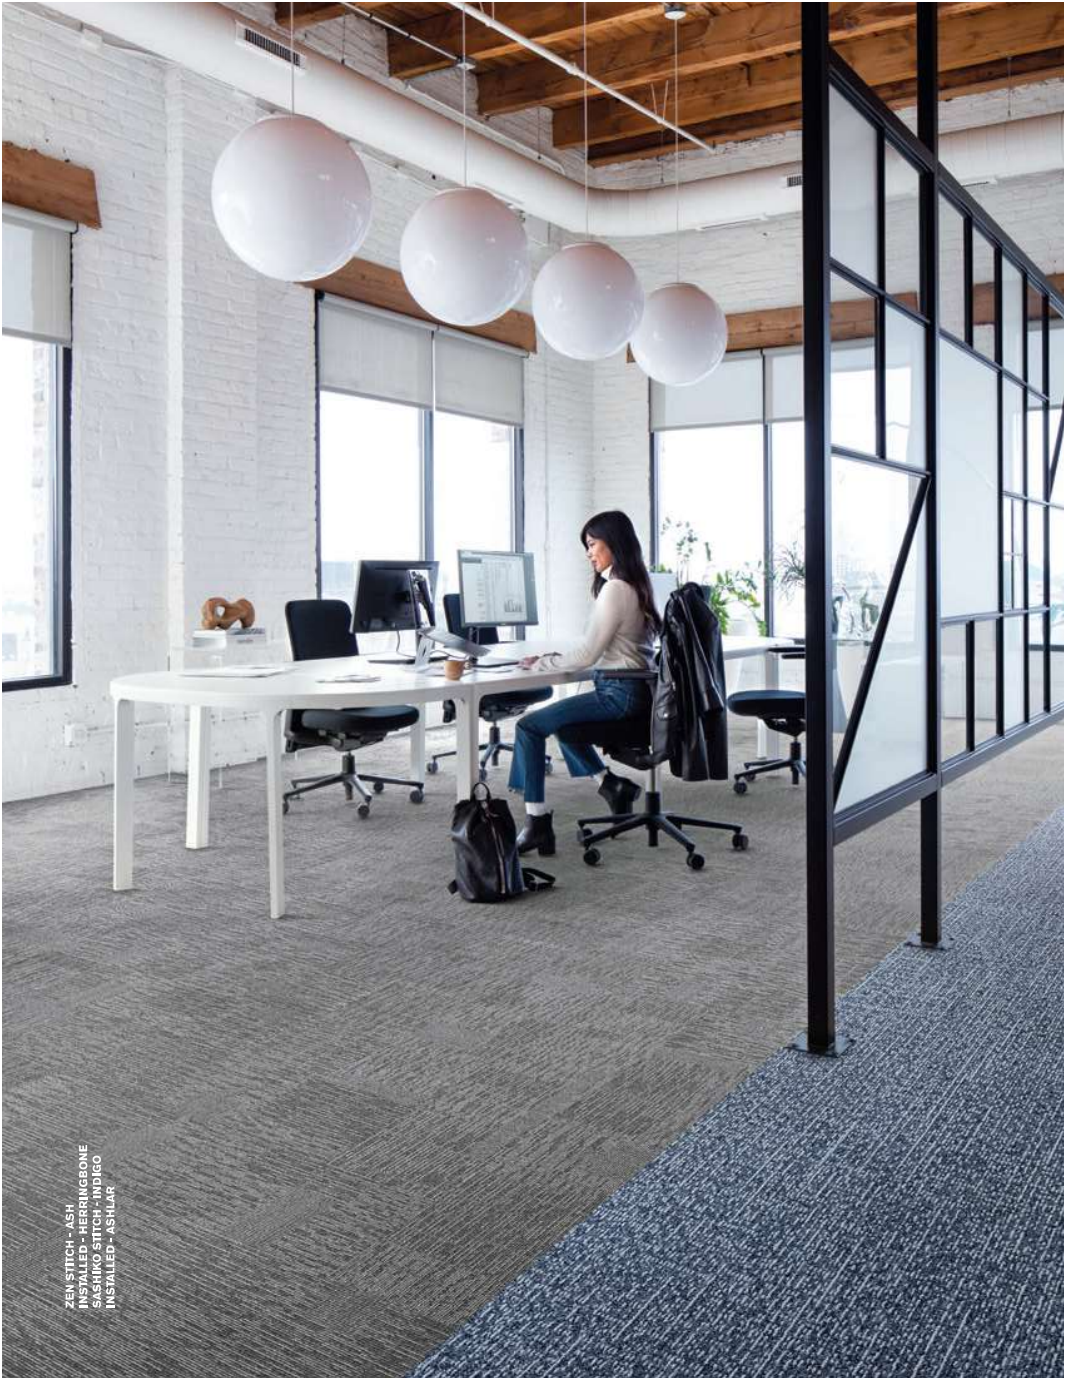

ZEN STITCH - ASH
9557005
SASHIKO STITCH - INDIGO
9557006
INSTALLED - ASHLAR

Employ Collection

Employ Constant



Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	462 g/m ² ± 5%
Pile Height	2,2 mm + 15% / - 10%
Total Thickness	5,2 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 3F22B60F
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	5,72 kg CO ₂ eq./m ²



EMPLOY CONSTANT - RUSSET
REINFORCED - BRICK
EMPLOY LOOP - BRICK
INSTALLED - MONOLITHIC

Employ Collection

Employ Dimensions



Backing	CQuest TM Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	462 g/m ² ± 5%
Pile Height	2,5 mm + 15% / - 10%
Total Thickness	5,5 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 6684AD28
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	5,72 kg CO ₂ eq./m ²



EMPLOY DIMENSIONS - SURFACE
LEVEL PILE - WASHED WHEAT
INSTALLED - ASHLAR



Employ Collection

Employ Lines



Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	462 g/m ² ± 5%
Pile Height	2,5 mm ± 15% / ~ 10%
Total Thickness	5,6 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 989)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 54BC02D7
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	5,72 kg CO ₂ eq./m ²



EMPLOY LINES - SUNSET
EMPLOY LINES - FORMATION
EMPLOY LINES - QUARRY
EMPLOY LINES - WATERFALL
EMPLOY LINES - MEADOW
EMPLOY LINES - IRIDESCENT
EMPLOY LINES - CARIBBEAN
EMPLOY LINES - MONOLITHIC

Employ Collection

Employ Loop

						
4197001 RAFFIA	4197002 TRUFFLE	4197003 SHADOW	4197004 CARAMEL	4197005 PRALINE	4197006 SHALE	4197007 NUTMEG
						
4197008 FOUNTAIN	4197009 JET	4197010 RYE	4197011 CIRRUS	4197012 ATLANTIC	4197013 CRYSTAL	4197014 TROPICAL
						
4197015 KIWI	4197016 NORDIC	4197017 PEACOCK	4197018 EDEN	4197019 BARING	4197020 OXFORD	4197021 CLEMENTINE
						
4197022 SAPPHIRE	4197023 LAVENDER	4197024 SALSA	4197025 COTTON	4197026 GROUND	4197027 URBAN	4197028 ASH
						
4197029 GRANITE	4197030 GRITSTONE	4197031 SANDS	4197032 AUTUMN	4197033 BRICK	4197034 FERN	4197035 EVERGLADE
						
4197036 INK						

Backing	CQuest™Bio
Product Definition	Tufted Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	518 g/m² ± 5%
Pile Height	2,6 mm ± 15% / - 10%
Total Thickness	5,1 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - D9884A79
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	6,26 kg CO ₂ eq /m²



Equilibrium



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m ² ± 5%
Pile Height	4.1 mm + 15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-B2AACDC5
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.66 kg CO ₂ eq / m ²



-60%

Carbon Negative with
CQuest™BioX backing option100%
Recycled NylonEQUILIBRIUM - HARMONY
INSTALLED MONOLITHIC

Haptic



9274023 LACE




9274021 WHISPER



9274022 BALSAM

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m ² ± 5%
Pile Height	2,9 mm ± 15% / ~ 10%
Total Thickness	6,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 3E38FAA3
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3,33 kg CO ₂ eq / m ²



HAPTIC - LACE
INSTALLED ASH/LAR
LEVEL SET NATURAL WOODGRAINS - BEECH
INSTALLED - ASH/LAR


Head Over Heels M0684




6640026 BEACH



6640027 SEPIA



6640028 TERRACOTTA



6640029 CARNIVAL



6640030 ANTIQUE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	844 g/m ² ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 15C056EF
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq./m ²



HEAD OVER HEELS SEPIA
INSTALLED - NOT DIRECTIONAL

Head Over Heels M0749



6640035 SPRING



6640036 SCARLET



6640037 SKY



6640038 FAWN



6640039 POWDER

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	844 g/m ² ± 5%
Pile Height	3,5 mm ± 15% / ~ 10%
Total Thickness	8,1 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 15C056EF
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3,74 kg CO ₂ eq./m ²



HEAD OVER HEELS M0749 - SPRING
INSULATED - NON DIRECTIONAL

Head Over Heels M0827



6640031 FUCHSIA



6640032 AZURE



6640033 SAFFRON




6640034 CORNFLOWER

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	844 g/m ² ± 5%
Pile Height	3,6 mm ± 15% / ~ 10%
Total Thickness	8,1 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 15C056EF
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3,74 kg CO ₂ eq. /m ²



HEAD OVER HEELS M0827 - CORNFLOWER
INSTALLED - NON DIRECTIONAL


Head Over Heels M1032

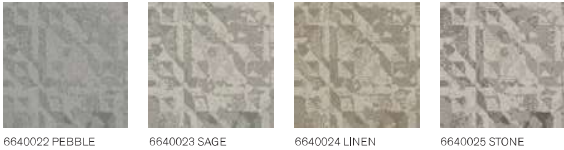

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	844 g/m ² ± 5%
Pile Height	3.9 mm + 15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 15C056EF
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq./m ²



Heuga 530 II






					
4288001 GRAVEL	4288002 PEBBLE	4288003 STONE	4288004 CARBON	4288005 SILVER	4288006 DOLPHIN
					
4288007 BASALT	4288008 BLACK	4288009 SILK GREY	4288010 CASHMERE	4288011 BARK	4288012 TAUPE
					
4288013 GOLDEN YELLOW	4288014 TERRACOTTA	4288015 DUSTY ROSE	4288016 FROSTED LILAC	4288017 DOVE BLUE	4288018 INDIGO
					
4288019 BLUEBERRY	4288020 BLUE MOON	4288021 GINGER	4288022 SAGE	4288023 MINT	4288024 FOREST

Backing	CQuest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	660 g/m² ± 5%
Pile Height	3,4 mm + 15% / - 10%
Total Thickness	6,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-A70B/BCAF
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3,68 kg CO ₂ eq /m²



HEUGA 530 II - DOVE BLUE
INSTALL SET - 100% RECYCLED NYLON
LEVEL SET NATURAL STONES - COOL IMPALA MARBLE
INSTALLED - NON DIRECTIONAL

Heuga 580 II

						
1267225 NICKEL	1267226 ELEPHANT	1267229 OYSTER	1267232 ONYX	1267233 ZIRCON	1267234 EARTH	1267236 BLACK
						
1267237 QUARTZ	1267239 ROSEWOOD	1267240 TIMBER	1267244 WENGE	1267245 CANARY	1267246 CANTALOUPE	1267250 FLAMINGO
						
1267253 LAVENDER	1267257 LEAK BLUE	1267259 BLUE MOON	1267260 BLUEBERRY	1267262 DEEP RIVER	1267265 LAUREL	1267268 WINDSOR GREEN
						
1267270 PEAR	1267271 THE SHIRE	1267274 REEF				

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	580 g/m ² ± 5%
Pile Height	2,7 mm + 15% / - 10%
Total Thickness	5,8 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - C2/CBC58F
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3,53 kg CO ₂ eq / m ²



HEUGA 580 II - ROSEWOOD & FLAMINGO
 INSTALLED - MONOLITHIC
 LEVEL SET NATURAL WOODGRAINS - CEDAR
 INSTALLED - ASHLAR

Heuga 725


					
1272036 GRAPHITE	1272037 PLATIN	1272038 OYSTER	1272039 PANTHER	1272061 ELEPHANT	1272040 COPRA
					
1272062 REAL BLACK	1272041 COAL	1272042 VIPER	1272046 RED	1272047 BOUGAINVILLE	1272049 BORDEAUX
					
1272050 VELVET	1272052 TURQUOISE	1272053 SPRING	1272054 OCEAN	1272055 TRUE BLUE	1272057 NIGHTSKY

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Cut Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	720 g/m ² ± 5%
Pile Height	4.2 mm ± 15% / ~ 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 18E62AD3
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.41 kg CO ₂ eq./m ²



HEUGA 725 - ELEPHANT
INSTALLED - MONOLITHIC


Heuga 727

						
4122120 PLATIN (SD)	4122121 ELEPHANT (SD)	4122122 GRAPHITE (SD)	4122123 COAL (SD)	4122124 DUST (SD)	4122125 PEBBLES (SD)	4122126 PANTHER (SD)
						
4122127 ONYX (SD)	4122128 SILVER (SD)	4122129 COPRA (SD)	4122131 NUTMEG (SD)	4122132 OYSTER (SD)	4122133 LINEN (SD)	4122138 HOT PEPPER (SD)
						
4122139 CHOCOLATE (SD)	4122140 CAYENNE (PD)	4122142 AMARYLLIS (SD)	4122143 MAUIVE (PD)	4122144 PASHMINA (PD)	4122152 MERCURY (SD)	4122153 LAVENDER (SD)
						
4122155 BLUE RIBAND (SD)	4122291 IRON (PD)	4122291 MAHOGANY (PD)	4122292 PUMPKIN (PD)	4122293 CRIMSON (PD)	4122294 CHESTNUT (PD)	4122295 ROSE (PD)
						
4122296 HEATHER (PD)	4122297 PLUM (PD)	4122298 LAPIS (PD)	4122299 INDIGO (PD)	4122300 CAPRI (PD)	4122301 TURQUOISE (PD)	4122302 TEAL (PD)
						
4122303 EUCALYPTUS (PD)	4122304 YELLOW GREEN (PD)	4122305 FOREST (PD)	4122306 FERN (PD)	4122307 MOSS (PD)	4122308 PEWTER (SD)	4122309 BASALT (SD)

Further colors and technical data can be found on the following page.



Heuga 727

4122310 MINK
(SD)4122311 PEARL BROWN
(SD)4122312 SALMON
(SD)4122313 PINE
(SD)4122314 SAGE
(SD)4122315 BOTTLE GREEN
(SD)

Piece Dyed (PD)

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	580 g/m ² ± 5%
Pile Height	2,6 mm ± 15% / - 10%
Total Thickness	5,6 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CBD6BE5B
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3,53 kg CO ₂ eq./m ²



Solution Dyed (SD)

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	535 g/m ² ± 5%
Pile Height	2,5 mm ± 15% / - 10%
Total Thickness	5,8 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 69D8C999
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	2,93 kg CO ₂ eq./m ²



HEUGA 727 - TURQUOISE
 INSTALLED - MONOLITHIC
 LEVEL SET NATURAL WOODGRAINS - WINTER GREY
 INSTALLED - ASHLAR

Interface*Hospitality*

Hip Over History M0939



7191001 VINTAGE



7191002 PINE



7191003 BOUQUET



7191004 EDEN



7191005 ORIENT

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Tile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m ² ± 5%
Pile Height	3.5 mm + 15% / - 10%
Total Thickness	77 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 7B6AFAE2
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	3.66 kg CO ₂ eq / m ²



HIP OVER HISTORY MESSER - ORIENT
INSTALLED ON DIPS COAT
LEVEL SET TEXTURED WOODGRAINS - ANTIQUE LIGHT OAK
INSTALLED - ASHLAR



Human Connections® Collection

Flagstone



8338001 GRANITE 8338002 SLATE 8338003 FLINT 8338004 ONYX


Backing	COquest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.6 mm ± 15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _i)	26 dB (EN ISO 10140-3)
Sound Absorption	α _a 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CE8E7E05
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq./m²



Carbon Negative with COquest™BioX backing option



Kerbstone



8339001 GRANITE 8339002 SLATE 8339003 FLINT 8339004 ONYX

Backing	COquest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m² ± 5%
Pile Height	3.5 mm ± 15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _i)	26 dB (EN ISO 10140-3)
Sound Absorption	α _a 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - EA8EAFFB
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.12 kg CO ₂ eq./m²



Carbon Negative with COquest™BioX backing option



FLAGSTONE - FLINT & ONYX
KERBSTONE - FLINT & ONYX
NON-DIRECTIONAL
INSTALLED - NON-DIRECTIONAL

Human Connections® Collection

Paver



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	645 g/m² ± 5%
Pile Height	3,4 mm ± 15% / - 10%
Total Thickness	6,7 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1* (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _p)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GLT PRODIS - DA5DB7CB
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	2,80 kg CO ₂ eq./m²



100%
Recycled Nylon



Carbon Negative with
CQuest™BioX backing option



*Bfl s1 on request



PAVER - ONYX
INSTALLED - NON DIRECTIONAL

Human Connections® Collection

Moss



8341001 GRANITE/MOSS



8341002 SLATE/MOSS



8341003 FLINT/MOSS



8341004 ONYX/MOSS

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m ² ± 5%
Pile Height	4.0 mm ± 15% / - 10%
Total Thickness	79 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _a 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DGEFDBB9
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3.64 kg CO ₂ eq./m ²



Moss in Stone



8340001 GRANITE EDGE



8340002 SLATE EDGE



8340003 FLINT EDGE



8340004 ONYX EDGE


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	848 g/m ² ± 5%
Pile Height	3.9 mm ± 15% / - 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _a 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 9CATE130
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3.43 kg CO ₂ eq./m ²




Sett in Stone



8342001 GRANITE



8342002 SLATE



8342003 FLINT



8342004 ONYX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m ² ± 5%
Pile Height	4.0 mm ± 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _a 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - ADD5EB6A
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.12 kg CO ₂ eq./m ²



MOSS IN STONE - FLINT EDGE
 8342003
 Moss in Stone - FLINT
 8342003
 Moss in Stone - FLINT/MOSS
 8342003
 INSTALLED - DESIGN BY TILE

Human Connections® Collection

Rue

8344001 GREY

8344002 TEAL

8344003 GREEN

8344004 YELLOW

8344005 ORANGE

8344006 RED

8344007 PINK

8344008 PURPLE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m ² ± 5%
Pile Height	4.5 mm ± 15% / - 10%
Total Thickness	8.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α ₀ 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6E1F82D1
Packaging	4 m ²
Carbon Footprint	3.64 kg CO ₂ eq./m ²
(cradle-to-gate)	

Stone Course

8343001 GREY/STONE

8343002 TEAL/STONE

8343003 GREEN/STONE

8343004 YELLOW/STONE

8343005 ORANGE/STONE

8343006 RED/STONE

8343007 PINK/STONE

8343008 PURPLE/STONE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m ² ± 5%
Pile Height	3.7 mm ± 15% / - 10%
Total Thickness	7.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α ₀ 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - E5BB54AB
Packaging	4 m ²
Carbon Footprint	3.64 kg CO ₂ eq./m ²
(cradle-to-gate)	

125

124

Human Nature® Collection

HN810



7617002 NICKEL



7617003 SLATE



7617004 LIMESTONE



7617006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1150 g/m² ± 5%
Pile Height	4,5 mm + 15% / - 10%
Total Thickness	8,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - OF564617
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4,37 kg CO ₂ eq /m²



HN810 - LIMESTONE
HN810 - LIMESTONE
HN810 - LIMESTONE
HN810 - LIMESTONE
INSTALLED - ASHLAR

Human Nature® Collection


HN820



7627002 NICKEL



7627003 SLATE



7627004 LIMESTONE



7627006 SHALE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Cut and Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.3 mm ± 15% / ~ 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1) *Bfl s1 on request
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FE6942E9
Packaging	4.5 m²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq / m²



HN820 - SHALE
HN820 - SLATE
HN820 - NICKEL
INSTALLED - DESIGN BY TILE

HN830



7621001 PERSIMMON



7621002 MAIZE



7621003 BLACK



7621004 COBALT



7621005 CLEMENTINE



7621006 KIWI



7621007 PISTACHIO



7621008 BONE

Backings	CQUEST®Bio
Product/Definition	Tufted Plain Shag Cut Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1425 g/m ² ± 5%
Pile Height	8.2 mm ± 15% / - 10%
Total Thickness	11.6 mm ± 0.5 mm
Wear Classification	General Contract (EN 1307) Class 32 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Capstar Chair	≥ 2.0 (EN 985)
Impact Sound Insulation (ΔL _w)	30 dB (EN ISO 10140-3)
Sound Absorption	α _{0.20} (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4A9DB8ED
Packaging	2.5 m ²
Carbon Footprint (cradle-to-gate)	5.21 kg CO ₂ eq./m ²



Human Nature® Collection

HN840



7619002 NICKEL



7619003 SLATE



7619004 LIMESTONE



7619006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	980 g/m² ± 5%
Pile Height	4,7 mm ± 15% / ~ 10%
Total Thickness	9,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-EE9E3485
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3,85 kg CO ₂ eq / m²



Human Nature® Collection

HN850



7615002 NICKEL



7615003 SLATE



7615004 LIMESTONE




7615006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1085 g/m² ± 5%
Pile Height	4.8 mm ± 15% / ~ 10%
Total Thickness	9.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	29 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-57ACB90F
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	4.16 kg CO ₂ eq./m²




HN850 - SLATE
Installed - ASH LAB

Hydropolis

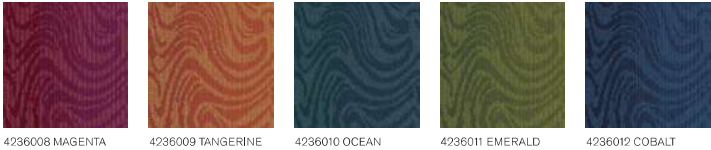

Backing	CQuest™Bio
Product Definition	Tufted Patterned Textured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	795 g/m ² ± 5%
Pile Height	3.6 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-4FE2973F
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.61 kg CO ₂ eq / m ²



HYDROPOLIS - COBALT
INSTALLLED - CORRECTION™
LEVEL SET NATURAL WOODGRAINS - SAND DUNE
INSTALLED - ASH/PLA

Ice Breaker



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	616 g/m ² ± 5%
Pile Height	3.7 mm ± 15% / ~ 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-7B65BA08
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	4.48 kg CO ₂ eq / m ²



ICE BREAKER - AGAVE & CLAYSTONE
INSTALLED - NON-DIRECTIONAL

Look Both Ways Collection

Step Aside



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	882 g/m ² ± 5%
Pile Height	3.4 mm ± 15% / ~ 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.29 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C5EFAF05
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. /m ²



STEP ASIDE - JET
INSTALLED - ASH
WALK OF LIFE - CARBON
INSTALLED - MONOLITHIC

Look Both Ways Collection

Step in Time



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	848 g/m ² ± 5%
Pile Height	3.1 mm ± 15% / ~ 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _p)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.29 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B43EAC3E
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.43 kg CO ₂ eq. /m ²



STEP IN TIME - ISI
INSTALLED - MONOLITHIC

Look Both Ways Collection

Step it Up

					
9406001 ALBA	9406002 CORALITE	9406003 ASH	9406004 CITRINE	9406005 EBONY	9406006 SIENNA
					
9406007 COAL	9406008 SLATE	9406009 INDIGO	9406010 AZURE	9406011 JET	9406012 JADE
					
9406200 ARCTIC	9406201 SAGE	9406202 CONCRETE	9406203 STEEL	9406204 COCOA	9406205 PEWTER
					
9406206 MINK	9406207 WHEAT	9406208 MUSTARD	9406209 TERRACOTTA	9406210 WINE	9406211 ROYAL
					
9406212 DENIM	9406213 FERN				


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	610 g/m ² ± 5%
Pile Height	3.0 mm ± 15% / ~ 10%
Total Thickness	6.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _i)	23 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.29 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-F24DC73E
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	2,69 kg CO ₂ eq /m ²



STEP IT UP - SAGE
INSTALLED - ASYLAR

Look Both Ways Collection

Step this Way

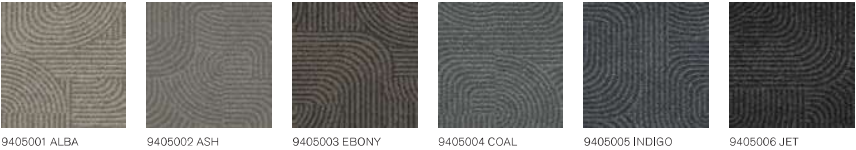

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m ² ± 5%
Pile Height	3.3 mm ± 15% / ~ 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.29 (EN ISO 11654)
Indoor Air Quality	GLT PRODIS - 3A3DAE09
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.33 kg CO ₂ eq. /m ²



Luxury Collection LC02



2369001 INK



2369002 WALNUT



2369003 FAWN



2369004 CLOUD

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1449 g/m ² ± 5%
Pile Height	6,4 mm + 15% / - 10%
Total Thickness	9,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-9CDF95FC
Packaging	Palletised
Carbon Footprint (cradle-to-gate)	5,33 kg CO ₂ eq /m ²



LUXURY COLLECTION - LC02 - FAWN
INSTALLED: LUXURY COLLECTION - FAWN
LEVEL SET NATURAL WOODGRAINS - BEECH
INSTALLED - ASHLAR

Interface*Hospitality*

Luxury Collection LC05




Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1319 g/m² ± 5%
Pile Height	5,7 mm ± 15% / ~ 10%
Total Thickness	9,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS- 4F7AC8A3
Packaging	3m²
Carbon Footprint (cradle-to-gate)	4,99 kg CO ₂ eq /m²



LUXURY COLLECTION LC05 PEACOCK
INSTALLED IN THE ETOREAL

Mod Café



8150001 STAR LINEN 8150002 STAR FLANNEL 8150003 STAR CHARCOAL 8150004 STAR BLACK

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1011 g/m² ± 5%
Pile Height	4,1 mm ± 15% / ~ 10%
Total Thickness	8,2 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 5E83259A
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3,95 kg CO ₂ eq /m²



MOD CAFÉ - STAR BLACK
INSTALLED - STAR CHARCOAL
WORLD WOVEN WW380 - BLACK LOOK
INSTALLED - ASHLAR

Near & Far Collection

NF400



7848003 FELT



7848004 MINERAL



7848005 DRIFTWOOD



7848006 LINEN



7848007 SHALE



7848009 HEMP

NF401



7959002 FELT



7959001 MINERAL



7959005 DRIFTWOOD



7959004 LINEN



7959003 SHALE



7959006 HEMP

NF400

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m ² ± 5%
Pile Height	3.4 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CB2C884F
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3.12 kg CO ₂ eq./m ²



NF401


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1153 g/m ² ± 5%
Pile Height	6.6 mm + 15% / - 10%
Total Thickness	10.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	29 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 087FD71E
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4.37 kg CO ₂ eq./m ²



NF400 - FELT
NF401 - SHALE
INSTALLED - DESIGN BY TIL

Net Effect® Collection


B601

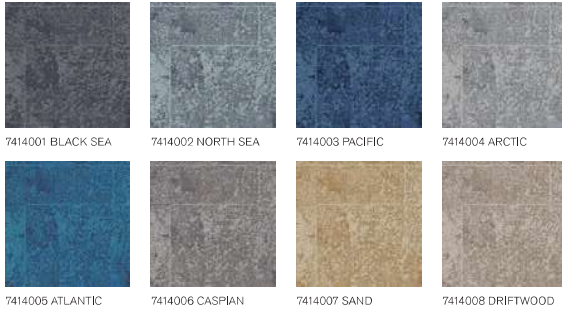

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	950 g/m ² ± 5%
Pile Height	4.4 mm ± 15% / - 10%
Total Thickness	9.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 67 C6F50F
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3.74 kg CO ₂ eq. / m ²



B602

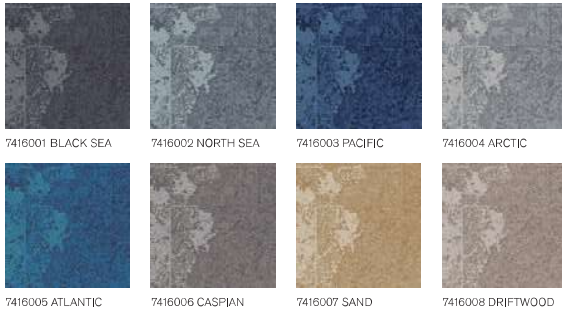


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m ² ± 5%
Pile Height	3.9 mm ± 15% / - 10%
Total Thickness	9.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 0291DBB3
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.53 kg CO ₂ eq. / m ²




B603



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m ² ± 5%
Pile Height	2.9 mm ± 15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 1A4E2B2A
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq. / m ²

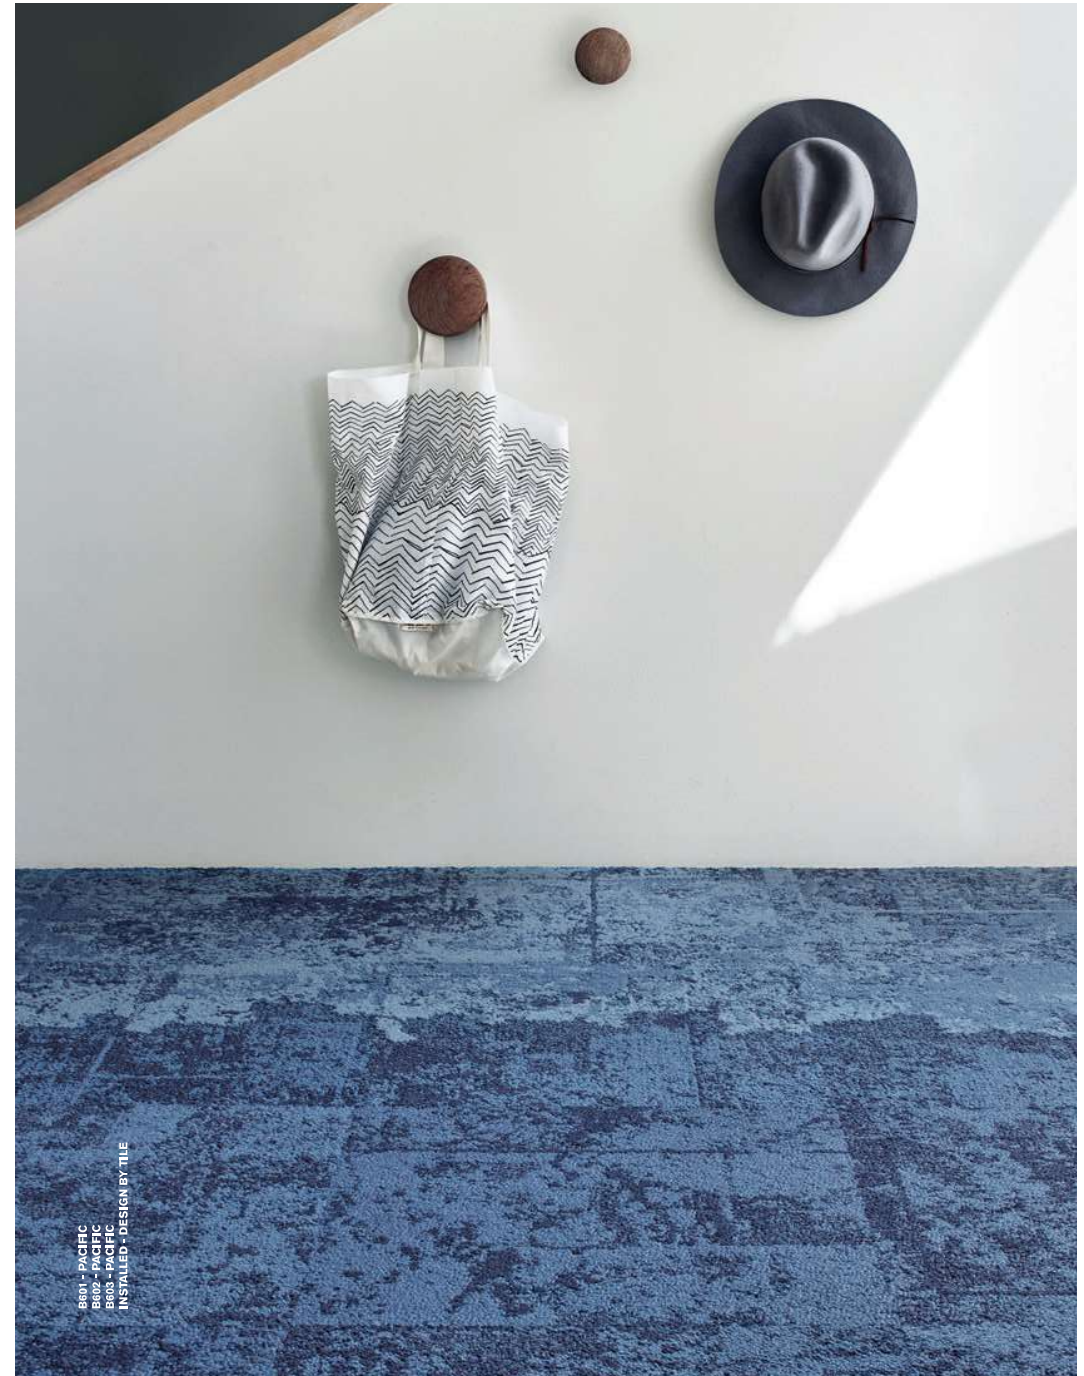

New Horizons II

					
4117002 WHEAT	4117003 OAK	4117004 NOUGAT	4117005 CHAMELEON	4117006 PEBBLES	4117007 ASH
					
4117008 SILVER	4117009 PLATIN	4117010 CARBON	4117011 SKY	4117012 MARINE	4117013 AMARYLLIS
					
4117014 STEEL	4117015 COBALT	4117016 NAVY	4117017 PETROL	4117018 PALM	4117019 WINDSOR

Backing	CQuest™Bio
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Nylon
Pile Yarn Weight	550 g/m² ± 5%
Pile Height	2,3 mm + 15% / - 10%
Total Thickness	5,3 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cl s1 (EN 13501-1) <i>Bl s1 on request</i>
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUt PRODIS-A3CFD1C0
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	6,57 kg CO ₂ eq./m²



NEW HORIZONS II - CARBON
INSTALLED MONOLITHIC



NY+LON Streets Collection

Broome Street



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	949 g/m ² ± 5%
Pile Height	3,7 mm ± 15% / ~ 10%
Total Thickness	8,1 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 08E9ABCO
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3,74 kg CO ₂ eq. /m ²



BROOME STREET - BLACK GLASS
INSTALLED - MONOLITHIC

NY+LON Streets Collection

Dover Street



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m ² ± 5%
Pile Height	2,7 mm ± 15% / ~ 10%
Total Thickness	6,3 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A0CBBB9
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3,33 kg CO ₂ eq. /m ²



DOVER STREET - STEEL DOT
NEWRCER STREET - STEEL CIRCLE
INSTALLED - MONOLITHIC

NY+LON Streets Collection

Mercer Street




Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	780 g/m ² ± 5%
Pile Height	3.9 mm ± 15% / ~ 10%
Total Thickness	7.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.29 (EN ISO 11654)
Indoor Air Quality	GLT PRODIS - DFA56BE2
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq. /m ²



MERCER STREET - BROWN CIRCLE
INSTALLED - MONOLITHIC

NY+LON Streets Collection

Old Street

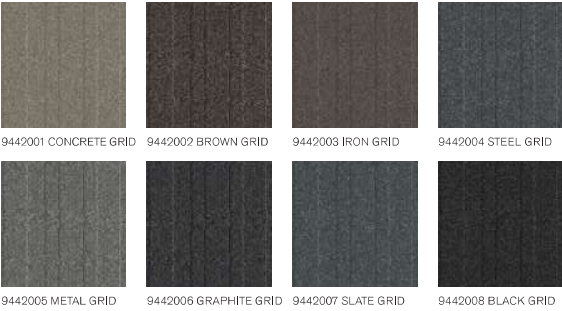

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	610 g/m ² ± 5%
Pile Height	2.8 mm + 15% / - 10%
Total Thickness	6.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 027A18F2
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	2.68 kg CO ₂ eq /m ²



OLD STREET - STEEL GRID
INSTALLED - MONOLITHIC

NY+LON Streets Collection

Reade Street



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m ² ± 5%
Pile Height	3.4 mm + 15% / - 10%
Total Thickness	7.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CC60E83A
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.33 kg CO ₂ eq /m ²



READE STREET - METAL PLATE
DOVER STREET - METAL DOT
INSTALLED - MONOLITHIC

NY+LON Streets Collection

Wheler Street



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	644 g/m ² ± 5%
Pile Height	3,2 mm + 15% / - 10%
Total Thickness	6,7 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-083CE1 DD
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	2,80 kg CO ₂ eq / m ²



WHEELER STREET - SLATE SQUARE
INSTALLED - MONOTHEMIC

Off Line



7559001 MUSHROOM/BISCUIT



7559002 MUSHROOM/MUSTARD



7559003 SAGE/BISCUIT



7559004 SAGE/CANARY



7559005 PEWTER/CLOUD



7559006 PEWTER/MANDARIN



7559007 PEPPER/CLOUD



7559008 PEPPER/LIME

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	718 g/m ² ± 5%
Pile Height	3.8 mm ± 15% / ~ 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 21A66C49
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3.41 kg CO ₂ eq./m ²



OFF LINE - MUSHROOM/MUSTARD & MUSHROOM/BISCUIT
OFF LINE - MUSHROOM/MUSTARD & MUSHROOM/BISCUIT
INSTALLED - HERRINGBONE



7335001 BISCUIT	7335002 MUSHROOM	7335003 MUSTARD
7335004 SAGE	7335005 CANARY	7335006 CLOUD
7335007 PEWTER	7335008 MANDARIN	7335009 PEPPER
7335010 LIME	7335015 TOPAZ	7335016 INK
7335017 FOREST	7335018 AZURE	7335019 LAPIS
7335020 POPPY	7335021 DUNE	7335022 TITANIUM
7335023 SABLE	7335024 GRANITE	7335025 PIGEON
7335026 AQUAMARINE	7335027 COBALT	7335028 MAGENTA

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	718 g/m ² ± 5%
Pile Height	3.7 mm ± 15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Capstar Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - AA41B44F
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3.41 kg CO ₂ eq./m ²



ON LINE - PEWTER & MANDARIN
OFF LINE - PEWTER/MANDARIN
INSTALLED - ASHLAR

Open Air Collection

Open Air 401



Backing	CQuest™Bio	
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	610 g/m² ± 5%	
Pile Height	2,7 mm ± 15% / ~ 10%	
Total Thickness	6,7 mm ± 0,5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2,4 (EN 989)	
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)	
Sound Absorption	α _s 0,20 (EN ISO 11854)	
Indoor Air Quality	GUT PRODIS - 5EF783A7	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3,13 kg CO ₂ eq. /m²	



Open Air Collection

Open Air 402



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m ² ± 5%
Pile Height	2.9 mm ± 15% / ~ 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-04DB42A4
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq./m ²



OPEN AIR 402 - GRANITE & STONE
INSTALLED - ASHUR

Open Air Collection

Open Air 403



Backing	CQuest™Bio	
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	610 g/m² ± 5%	
Pile Height	2,6 mm + 15% / - 10%	
Total Thickness	6,7 mm ± 0,5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2,4 (EN 985)	
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)	
Sound Absorption	α _w 0,20 (EN ISO 11854)	
Indoor Air Quality	GUTPRODIS - CF2DBE98	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3,13 kg CO ₂ eq. /m²	



OPEN AIR 403 - NICKEL
Installed - NON DIRECTIONAL

Open Air 403 Accent




Backing	CQuest™Bio	↶↷↸↹ NON-CERTIFICATED
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	610 g/m² ± 5%	
Pile Height	2.6 mm +15% / - 10%	
Total Thickness	6.7 mm ± 0.5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Flared	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2.4 (EN 985)	
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)	
Sound Absorption	α _w 0.20 (EN ISO 11654)	
Indoor Air Quality	GUT PRODIS - CF2DBE98	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3.13 kg CO ₂ eq. / m²	CO₂ Carbon Negative with CQuest™Box backing option 100% Recycled Nylon



OPEN AIR 403 TRANSITION - NICKEL/CARIBBEAN
INSTALLED - DESIGN BY TILE
OPEN AIR 403 ACCENT - CARIBBEAN
OPEN AIR 403 - NICKEL
INSTALLED - NON DIRECTIONAL

Open Air 403 Transition

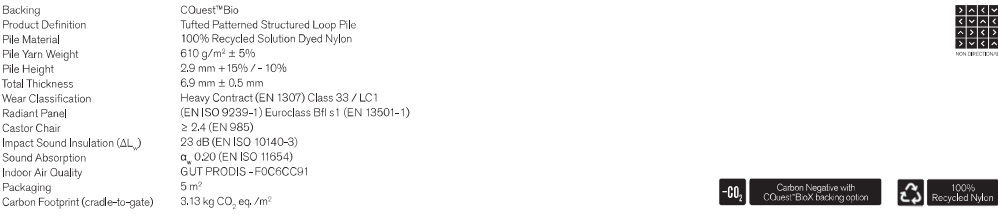

Open Air Collection

Open Air 404



Backing	CQuest™Bio	
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	610 g/m² ± 5%	
Pile Height	2,6 mm ± 15% / ~ 10%	
Total Thickness	6,7 mm ± 0,5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2,4 (EN 985)	
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)	
Sound Absorption	α _w 0,20 (EN ISO 11654)	
Indoor Air Quality	GUT PRODIS-DM45FBB8	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3,13 kg CO ₂ eq. /m²	



OPEN AIR 404 - STONE
INSTALLED - 100% CARBON NEGATIVE

Open Air Collection

Open Air 404 Accent



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m² ± 5%
Pile Height	2,6 mm ± 15% / ~ 10%
Total Thickness	6,7 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DM45FBB8
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3,13 kg CO ₂ eq. /m²



OPEN AIR 404 - NICKEL
OPEN AIR 404 - ACCENT - RUST
INSTALLED - NON DIRECTIONAL
OPEN AIR 404 TRANSITION - NICKEL/RUST
INSTALLED - DESIGN BY TILE

Open Air Collection

Open Air 404 Transition



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	610 g/m ² ± 5%
Pile Height	2,9 mm ± 15% / ~ 10%
Total Thickness	6,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 989)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - AFA1534A
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3,13 kg CO ₂ eq./m ²



OPEN AIR 404 TRANSITION - NICKEL/CLEMENTINE
INSTALLATION: 100% RECYCLED CARPET TILE
OPEN AIR 404 - NICKEL
INSTALLED - NON-DIRECTIONAL

Open Air Collection

Open Air 405



Backing	CQuest™Bio	
Product Definition	Tufted Patterned Structured Loop Pile	
Pile Material	100% Recycled Solution Dyed Nylon	
Pile Yarn Weight	610 g/m² ± 5%	
Pile Height	2,9 mm + 15% / - 10%	
Total Thickness	6,7 mm ± 0,5 mm	
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1	
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)	
Castor Chair	≥ 2,4 (EN 985)	
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)	
Sound Absorption	α _s 0,20 (EN ISO 11854)	
Indoor Air Quality	GUT PRODIS - 493B7CE1	
Packaging	5 m²	
Carbon Footprint (cradle-to-gate)	3,13 kg CO ₂ eq. /m²	



OPEN AIR 405 - CHARCOAL
INSTALLED, HIGH DIRECTIONAL

Overedge



9271001 B&W OVEREDGE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Shag Cut Tile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1424 g/m ² ± 5%
Pile Height	8,9 mm + 15% / - 10%
Total Thickness	11,6 mm ± 0,5 mm
Wear Classification	General Contract (EN 1307) Class 32 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Cl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _p)	30 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 150D9A1B
Packaging	2,5 m ²
Carbon Footprint (cradle-to-gate)	5,21 kg CO ₂ eq./m ²



OVEREDGE - B&W OVEREDGE
INSTALLER: INTERIORS

Past Forward Collection

Antiquities



9961004 AMBER



9961003 CORAL



9961001 CRIMSON



9961002 JADE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	949 g/m ² ± 5%
Pile Height	3,7 mm + 15% / - 10%
Total Thickness	8,7 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3,74kg CO ₂ eq./m ²



ANTIQUE - AMBER
INSTALLED - NON DIRECTIONAL
LEVEL SET - RUSTIC OAK
INSTALLED - ASHLAR

Past Forward Collection

Archival



9949001 FROST 9949003 LINEN 9949004 PARCHMENT 9949002 PEARL

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1323 g/m² ± 5%
Pile Height	5.3 mm ± 15% / ~ 10%
Total Thickness	10.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GLT PRODIS - PENDING
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4.89kg CO ₂ eq / m²



ARCHIVAL - PEARL
INSTALLED - MONOLITHIC



Past Forward Collection

Arley



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	949 g/m ² ± 5%
Pile Height	3,5 mm + 15% / - 10%
Total Thickness	8,6 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3,74kg CO ₂ eq./m ²



ARLEY - WALNUT
ARLEY - WALNUT - DIRECTIONAL
NORTHERN GRAIN - ANTIQUE WASH
INSTALLED - JASH'24

Past Forward Collection

Cheshire Street



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m ² ± 5%
Pile Height	3.1 mm +15% / -10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3.95kg CO ₂ eq./m ²



CHESHIRE STREET - COBALT
INSTALLED - NON DIRECTIONAL

Past Forward Collection

Circa Then



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	949 g/m ² ± 5%
Pile Height	4.0 mm + 15% / - 10%
Total Thickness	8.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3,74kg CO ₂ eq./m ²



Past Forward Collection

Decades



9950001 DENIM



9950002 EBONY



9950004 MOCHA



9950003 SLATE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1220 g/m² ± 5%
Pile Height	5,0 mm + 15% / - 10%
Total Thickness	10,1 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GLT PRODIS - PENDING
Packaging	3 m²
Carbon Footprint (cradle-to-gate)	4,58kg CO ₂ eq. / m²



DECADÉS - SLATE
INSTALLED - MONOLITHIC
OPEN AIR 404 - MICHEL
INSTALLED - NON DIRECTIONAL

Past Forward Collection

Fortnight




Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1220 g/m ² ± 5%
Pile Height	3,7 mm + 15% / - 10%
Total Thickness	8,7 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	4,58kg CO ₂ eq. / m ²



FORTNIGHT - NATURAL
INSTALLED NON-DIRECTIONAL

Past Forward Collection

Newstalgia

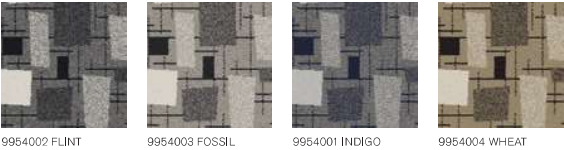

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m ² ± 5%
Pile Height	3,8 mm + 15% / - 10%
Total Thickness	8,7 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3,64kg CO ₂ eq. / m ²



NEWSTALGIA - FOSSIL
NEWSTALGIA - FOSSIL
NEWSTALGIA - FOSSIL
NEWSTALGIA - FOSSIL

Past Forward Collection

Reeling



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m ² ± 5%
Pile Height	3,6 mm ± 15% / ~ 10%
Total Thickness	8,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3,53kg CO ₂ eq. / m ²



REELING - AVOCADO
REELING - PEBBLE
REELING - SAPPHIRE
REELING - SPICE
REELING - HONEY
REELING - JADE
REELING - LIME
REELING - MINT
REELING - NAVY
REELING - PEBBLE
REELING - SAPPHIRE
REELING - SPICE
REELING - HONEY
REELING - JADE
REELING - LIME
REELING - MINT
REELING - NAVY

Past Forward Collection

Rekindled



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1153 g/m ² ± 5%
Pile Height	4,6 mm ± 15% / ~ 10%
Total Thickness	9,1 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GLT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	4,37kg CO ₂ eq./m ²



REKINDLED - SAND
INSTALLED - NON DIRECTIONAL

Past Forward Collection

Retrospec



Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m ² ± 5%
Pile Height	3,9 mm + 15% / - 10%
Total Thickness	8,5 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3,64kg CO ₂ eq./m ²



RETROSPEC - OLIVE
RECYCLED 100% NYLON DIRECTIONAL
OPEN AIR 402 - NATURAL
INSTALLED - ASHLAR

Past Forward Collection

Unspooled



9953002 GRAPHITE



9953004 OATMEAL



9953003 OYSTER



9953001 PEWTER


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1119 g/m ² ± 5%
Pile Height	4.8 mm ± 15% / ~ 10%
Total Thickness	9.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	28 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GLT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	4.27kg CO ₂ eq./m ²



UNSPUNNED - GRAPHITE
UNSPUNNED - MONOLITHIC

Past Forward Collection

Unwound

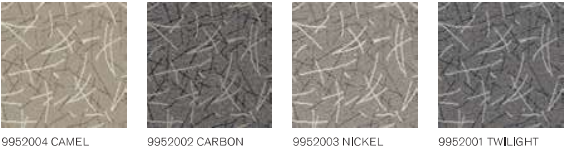

9952004 CAMEL 9952002 CARBON 9952003 NICKEL 9952001 TWILIGHT

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	848 g/m ² ± 5%
Pile Height	4.4 mm + 15% / - 10%
Total Thickness	9.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GLT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3.43kg CO ₂ eq./m ²



UNWOUND - TWILIGHT
INSTALLED - MONOLITHIC

Past Forward Collection

Yesterdays



9960004 BRONZE



9960003 FLANNEL



9960002 ONYZ



9960001 PRUSSIAN

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	848 g/m ² ± 5%
Pile Height	3,6 mm + 15% / - 10%
Total Thickness	8,2 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	3,43kg CO ₂ eq./m ²




YESTERDAYS - FLANNEL
INSTALLED - NON DIRECTIONAL

4266001 METAL	4266002 MOUSEY	4266003 CLOUDBURST	4266004 LIQUORICE	4266005 SILK GREY	4266006 CINDER
4266007 SHIITAKE	4266008 MOLE	4266009 WATERFALL	4266010 DISTANT	4266011 DAPHNE	4266012 PERIDOT
4266013 COLUMBIA	4266014 POWDERBLUE	4266015 BLUE NIGHTS	4266016 DAIQUIRI	4266017 TURTLEDOVE	4266018 MIMOSA
4266019 BUBBLEGUM	4266020 VIOLA	4266021 MARZIPAN	4266022 CARROT	4266023 GRENADINE	4266024 MALVA



POLICHROME SOLID - TURTLEDOVE
POLICHROME STIPPLE - LINEN
INSTALLED - MONOLITHIC

Polichrome Stipple

					
4265001 DRIZZLE	4265002 DOLPHIN	4265003 CAVIAR	4265004 JAVA	4265005 MOONROCK	4265006 SMOKY PEARL
					
4265007 HEMP	4265008 PEAT	4265009 ALHAMBRA	4265010 NIAGARA	4265011 LOBELIA	4265012 HERBAL
					
4265013 EVERGLADE	4265014 INFINITY	4265015 MAZARINE	4265016 CACTUS	4265017 LINEN	4265018 BUTTERCUP
					
4265019 ROSEBUD	4265020 TULIP	4265021 HAZEL	4265022 NECTARINE	4265023 LOLLIPOP	4265024 MULBERRY

Backing	CQuest™Bio
Product Definition	Tufted Fringe Cut Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	1100 g/m ² ± 5%
Pile Height	4.2 mm + 15% / - 10%
Total Thickness	7.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _{0.20} (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-6E98BDBB
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4.51 kg CO ₂ eq./m ²



POLICHROME STIPPLE - DRIZZLE & TULIP
POLICHROME STIPPLE - DRIZZLE & TULIP
INSTALLED - DESIGN BY TIL

Interface*Hospitality*

Portmanteau PM19



7968001 ROSEWOOD



7968002 COBALT



7968003 BERRY



7968004 HONEY



7968005 EBONY & IVORY


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1034 g/m ² ± 5%
Pile Height	5,7 mm + 15% / - 10%
Total Thickness	9,7 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-6E7BD9D4
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4,24 kg CO ₂ eq /m ²



Portmanteau PM39



8063001 EBONY & IVORY



8063002 BUTTERSCOTCH



8063003 PISTACHIO



8063004 SAGE



8063005 DENIM

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1034 g/m ² ± 5%
Pile Height	5,1 mm + 15% / - 10%
Total Thickness	9,2 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-6E7B09D4
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4,24 kg CO ₂ eq / m ²



8063005 DENIM
100% Recycled Nylon

Portmanteau PM49




8064001 ECRU




8064002 GARDEN STONE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1034 g/m ² ± 5%
Pile Height	5,4 mm ± 15% / ~ 10%
Total Thickness	9,5 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-6E7BD9D4
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4,24 kg CO ₂ eq / m ²



Recreation

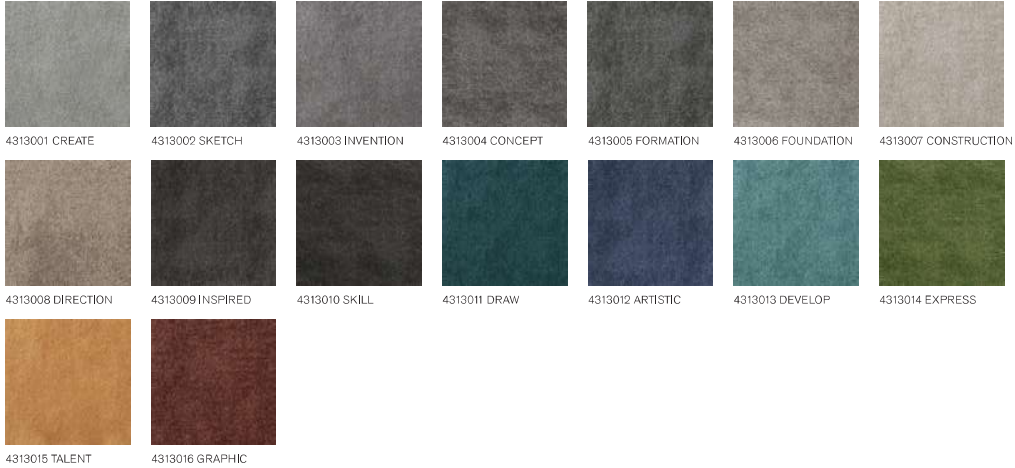

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	583 g/m ² ± 5%
Pile Height	2.8 mm ± 15% / ~ 10%
Total Thickness	6.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-FBEF290B
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3.06 kg CO ₂ eq / m ²



RECREATION - CONSTRUCTION & GRAPHIC
INSTALLED - NON-DIRECTIONAL

RMS 607



7179001 PEWTER 7179002 TITANIUM 7179003 IVORY

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	832 g/m ² ± 5%
Pile Height	4.1 mm ± 15% / ~ 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 272A4A4D
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3.71 kg CO ₂ eq./m ²



RMS 607 - IVORY
INSTALLATION DIRECTIONAL
LEVEL SET TEXTURED WOODGRAINS - ANTIQUE LIGHT OAK
INSTALLED - ASHLAR



Sampa



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1228 g/m ² ± 5%
Pile Height	5,2 mm + 15% / - 10%
Total Thickness	9,5 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-D00BC59B
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	4,75 kg CO ₂ eq / m ²



SAMPA - ANZAC
INSTALLED MONOLITHIC



Superflor II



Backing	CQuest™Bio
Product Definition	Coarse Fibre Needlefelt Pile
Pile Material	70% Solution Dyed Nylon, 20% Polyester, 10% Polypropylene
Pile Yarn Weight	521 g/m ² ± 5%
Total Thickness	6,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	22 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 68A7A3CA
Packaging	4 m ²



NON-DIRECTIONAL

SUPERFLOR II - OCEANUS II & RAVEN II
INSTALLED - NON-DIRECTIONAL



The Scandinavian Collection



Backing	CQuest™Bio
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon; Contains Recycled Content
Pile Yarn Weight	400 g/m ² ± 5%
Total Thickness	4,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-99C6AF1E
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3,35 kg CO ₂ eq. /m ²



THE SCANDINAVIAN COLLECTION - BERGEN
INSTALLED - QUARTER TURN



Touch & Tones II Collection

Touch & Tones II 101




Backing	CQuest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	700 g/m ² ± 5%
Pile Height	3,3 mm ± 15% / ~ 10%
Total Thickness	6,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cl s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - FOC9/A15F
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	3,76 kg CO ₂ eq./m ²



TOUCH & TONES II 101 - TERRACOTTA
TOUCH & TONES II 102 - TERRACOTTA
INSTALLED - MONOLITHIC
BRUSHED LINES - SANDALWOOD
INSTALLED - ASHLAR

Touch & Tones II Collection

Touch & Tones II 102

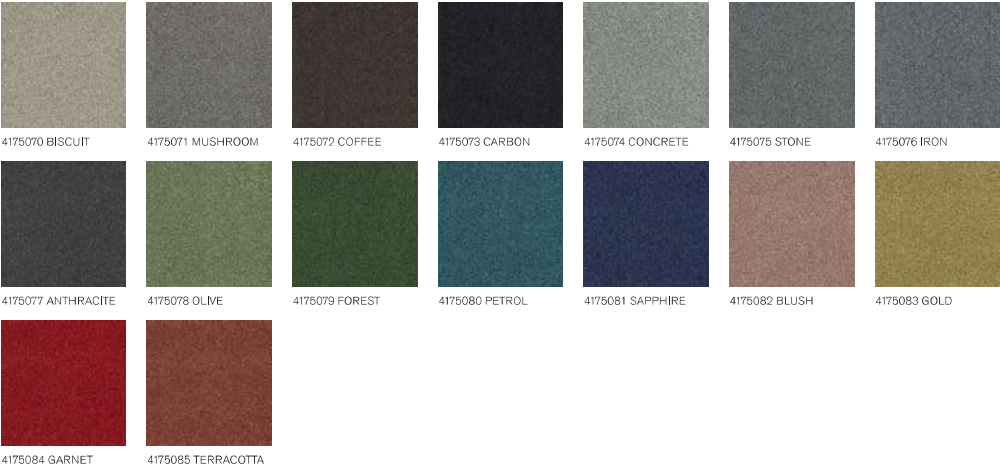

Backing	CQuest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	925 g/m ² ± 5%
Pile Height	4,9 mm ± 15% / ~ 10%
Total Thickness	8,5 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-1D5ABBA8
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4,18 kg CO ₂ eq / m ²



TOUCH & TONES II 102 - FOREST
100% RECYCLED NYLON
INSTALLED - MONOLITHIC

Touch & Tones II Collection

Touch & Tones II 103



Backing	CQuest™Bio
Product Definition	Tufted Plain Shag Cut Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	1136 g/m ² ± 5%
Pile Height	7,1 mm +15% / -10%
Total Thickness	10,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-4A32FB0D
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	4,58 kg CO ₂ eq /m ²



TOUCH & TONES II 103 - PETROL
 INSTALLED ON A 100% RECYCLED NYLON
 LEVEL SET NATURAL WOODGRAINS - WINTER GREY
 INSTALLED - ASHLAR

Touch of Timber

4191001 Balsa

4191002 Bamboo

4191003 Oak

4191004 Elm

4191005 Silver Birch

4191006 Ash

4191007 Maple

4191008 Sycamore

4191009 Blue Spruce

4191010 Olive

4191011 Walnut

4191012 Blackwood

Backing	COquest™ Bio
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	499 g/m ² ± 5%
Total Thickness	5,0 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	16 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B17332B6
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	2,84 kg CO ₂ eq. /m ²

TOUCH OF TIMBER - SILVER BIRCH
INSTALLED - HERRINGBONE

251

250

Transformation



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	576 g/m ² ± 5%
Pile Height	3.3 mm ± 15% / ~ 10%
Total Thickness	6.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _p)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 193E33DD
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	4.27 kg CO ₂ eq / m ²



NON-DIRECTIONAL



Upon Common Ground Collection

Dry Bark



2529001 DESERT NEUTRAL



2529002 DESERT SANDS



2529003 SALTWATER NEUTRAL



2529004 SALTWATER DEPTH



2529005 RAINFOREST NEUTRAL



2529006 RAINFOREST CANOPY



2529007 FRESHWATER NEUTRAL



2529008 FRESHWATER GORGE



2529009 SPINIFEX NEUTRAL



2529010 SPINIFEX GRASS

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m ² ± 5%
Pile Height	3,6 mm ± 15% / - 10%
Total Thickness	7,6 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	3,57 kg CO ₂ eq./m ²



Carbon Negative with
CQuest™BioX tracking option




100%
Recycled Nylon



DRY BARK - FRESHWATER NEUTRAL
INSTALLED - ASHLAR

Upon Common Ground Collection

Escarpment

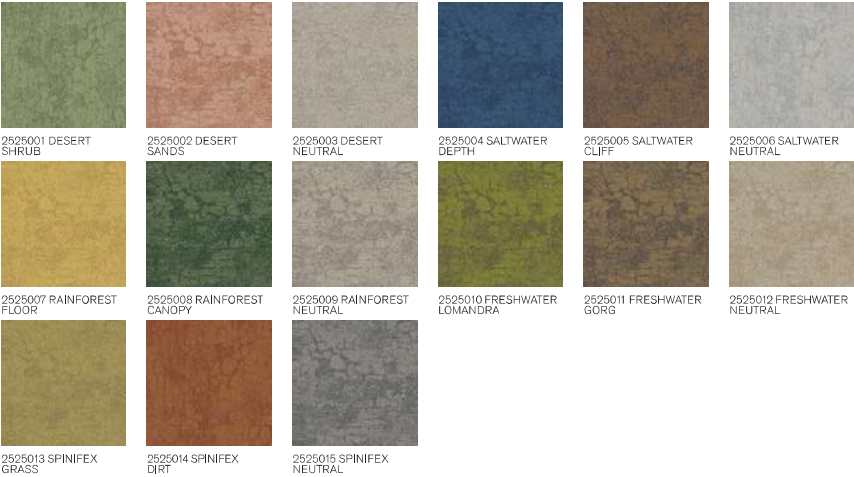

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	644 g/m² ± 5%
Pile Height	3,5 mm ± 15% / ~ 10%
Total Thickness	7,0 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3,22 kg CO ₂ eq. /m²



ESCARPMENT - FRESHWATER LOMANDRA & FRESHWATER GORGE
INSTALLED - 45110K

Upon Common Ground Collection

Sandbank



2528001 DESERT



2528002 SALTWATER



2528003 RAINFOREST



2528004 FRESHWATER



2528005 SPINIFEX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m ² ± 5%
Pile Height	4,2 mm ± 15% / ~ 10%
Total Thickness	9,5 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	4,19 kg CO ₂ eq./m ²



SANDBANK - RAINFOREST
UNIDIRECTIONAL
INSTALLATION - ASHILAR

Upon Common Ground Collection

Shallows



2527001 DESERT



2527002 SALTWATER



2527003 RAINFOREST



2527004 FRESHWATER



2527005 SPINIFEX


Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1153 g/m ² ± 5%
Pile Height	4,0 mm ± 15% / ~ 10%
Total Thickness	9,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	4,55 kg CO ₂ eq. /m ²



SHALLOWS - SPINIFEX
INDOOR - OUTDOOR
SANDBANK - SPINIFEX
DRY BARK - SPINIFEX NEUTRAL
INSTALLED - ASHLAR

Upon Common Ground Collection

Undulating Water




2526001 DESERT



2526002 SALTWATER



2526003 RAINFOREST



2526004 FRESHWATER



2526005 SPINIFEX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1153 g/m ² ± 5%
Pile Height	4.3 mm + 15% / - 10%
Total Thickness	9.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	3 m ²
Carbon Footprint (cradle-to-gate)	4.55 kg CO ₂ eq. /m ²



UNDULATING WATER - DESERT
SHALLOUS DESERT
SANDBANK - DESERT
ESCARPMENT - DESERT SHRUB
INSTALLED - ASHLAR

Urban Retreat® Collection

UR101

7148002 CHARCOAL/
LICHEN

7148003 STRAW/GRASS

7148004 GRANITE/
LICHEN

7148005 FLAX/GRASS



7148006 STONE/IVY



7148008 ASH/IVY

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	851 g/m ² ± 5%
Pile Height	2.6 mm ± 15% / - 10%
Total Thickness	8.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 9DAFEDDB
Packaging	4 m ²
Carbon Footprint	3.43 kg CO ₂ eq./m ²



UR102



7146002 CHARCOAL



7146003 STRAW



7146004 GRANITE



7146005 FLAX



7146006 STONE



7146008 ASH

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	863 g/m ² ± 5%
Pile Height	2.4 mm ± 15% / - 10%
Total Thickness	7.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 27F161F8
Packaging	4 m ²
Carbon Footprint	3.53 kg CO ₂ eq./m ²




UR103



7150001 LICHEN



7150002 IVY



7150004 GRASS

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	857 g/m ² ± 5%
Pile Height	2.6 mm ± 15% / - 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	26 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 2F15A679
Packaging	4 m ²
Carbon Footprint	3.53 kg CO ₂ eq./m ²



UR101 - FLAX/GRASS
UR102 - FLAX
UR103 - GRASS
- INSTALLED - DESIGN BY TIL

Works Collection

Works Effect



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	612 g/m² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-A4C47888
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	7.16 kg CO ₂ eq./m²



WORKS EFFECT HAZE
INSTALLATION DIRECTIONAL

Works Collection

Works Element




Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	602 g/m² ± 5%
Pile Height	3,2 mm + 15% / - 10%
Total Thickness	6,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - C3DCA586
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	7,16 kg CO ₂ eq./m²



WORKS ELEMENT - EBONY
REPRODUCE - 3001015598800

Works Collection

Works Flow

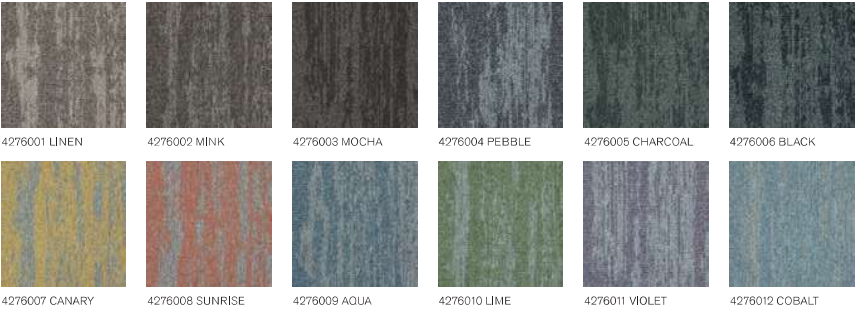


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	600 g/m ² ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - E945FCAB
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	7.05 kg CO ₂ eq./m ²



WORKS FLOW - PEBBLE
INSTALLED ON POLISHED CONCRETE
LEVEL SET TEXTURED STONES - COOL POLISHED CEMENT
INSTALLED - NON DIRECTIONAL

Works Collection

Works Freestyle

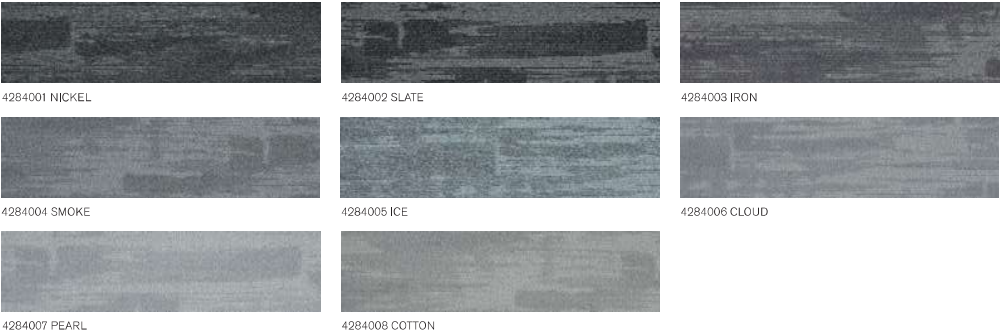

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	596 g/m² ± 5%
Pile Height	3,9 mm + 15% / - 10%
Total Thickness	7,2 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 989)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-4BA80553
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	6,97 kg CO ₂ eq./m²



Works Collection

Works Sense



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	598 g/m² ± 5%
Pile Height	3.3 mm ± 15% / ~ 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-5C91/CBDA
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	703 kg CO ₂ eq./m²



WORKS SENSE - EBONY
NO WALLS - DRIFT

World Woven® Collection

WW860



8109001 LINEN TWEED



8109002 FLANNEL TWEED



8109003 CHARCOAL TWEED



8109004 BLACK TWEED



8109005 BROWN TWEED



8109006 NATURAL TWEED



8109007 RAFFIA TWEED



8109008 SISAL TWEED

Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	575 g/m ² ± 5%
Pile Height	2.5 mm + 15% / - 10%
Total Thickness	5.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0.15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - EBA77B9F
Packaging	5 m ²
Carbon Footprint (cradle-to-gate)	2.59 kg CO ₂ eq /m ²



WW860 - NATURAL TWEED & RAFFIA TWEED
WASHER CLEANABLE
INSTALLED - ASHILAR

World Woven® Collection

WW865



8110001 HEATHER WARP



8110002 LOCH WARP



8110003 HIGHLAND WARP



8110004 MOORLAND WARP



8110005 FUCHSIA WARP



8110006 AUTUMN WARP



8110007 GLEN WARP



8110008 DALE WARP


Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	575 g/m² ± 5%
Pile Height	2,5 mm ± 15% / ~ 10%
Total Thickness	5,8 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1) <i>Bfl s1 on request</i>
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _s 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - FECF9CFA
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	2,58 kg CO ₂ eq /m²



WW865 - MOORLAND WARP
WW865 - FUCHSIA WARP
WW865 - AUTUMN WARP
WW865 - GLEN WARP
WW865 - DALE WARP

World Woven® Collection

WW870



8111001 LINEN WEFT



8111002 FLANNEL WEFT



8111003 CHARCOAL WEFT



8111004 BLACK WEFT



8111005 BROWN WEFT



8111006 NATURAL WEFT



8111007 RAFFIA WEFT



8111008 SISAL WEFT

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.1 mm + 15% / - 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass CH s1 (EN 13501-1) <i>BI s1 on request</i>
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - D4514D1D
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3.22 kg CO ₂ eq /m²



WW870 - FLANNEL WEFT & LINEN WEFT
INSTALLED - DESIGN BY TILE

World Woven® Collection

WW880



8112001 LINEN LOOM



8112002 FLANNEL LOOM



8112003 CHARCOAL LOOM



8112004 BLACK LOOM



8112005 BROWN LOOM



8112006 NATURAL LOOM



8112007 RAFFIA LOOM



8112008 SISAL LOOM

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	850 g/m² ± 5%
Pile Height	4,1 mm +15% / - 10%
Total Thickness	7,5 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BE55AF2F
Packaging	5 m²
Carbon Footprint (cradle-to-gate)	3,43 kg CO ₂ eq /m²



World Woven® Collection

WW890



8113001 LINEN DOBBY



8113002 FLANNEL DOBBY



8113003 CHARCOAL DOBBY



8113004 BLACK DOBBY



8113005 BROWN DOBBY



8113006 NATURAL DOBBY



8113007 RAFFIA DOBBY



8113008 SISAL DOBBY

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m ² ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUt PRODIS-EC44A5BF
Packaging	4.5 m ²
Carbon Footprint (cradle-to-gate)	3.95 kg CO ₂ eq /m ²



WW890 BLACK DOBBY & NATURAL DOBBY
INSTALLED - DESIGN BY TALE

World Woven® Collection

WW895



8114001 HEATHER WEAVE



8114002 LOCH WEAVE



8114003 HIGHLAND WEAVE



8114004 MOORLAND WEAVE



8114005 FUCHSIA WEAVE



8114006 AUTUMN WEAVE



8114007 GLEN WEAVE



8114008 DALE WEAVE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m² ± 5%
Pile Height	3.8 mm ± 15% / ~ 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	25 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS-DAAA081A
Packaging	4.5 m²
Carbon Footprint (cradle-to-gate)	3.95 kg CO ₂ eq /m²



WORLD WOVEN® HEATHER WEAVE
INSTALLED IN A ROOM

Woven Gradience Collection

WG100



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.1 mm ± 15% / ~ 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-01 FEC7DD
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.57 kg CO ₂ eq./m²



WG100 - ROSE & INK
INSTALLED IN A MODULITHIC
WG200 - INK/ROSE
INSTALLED - DESIGN BY TILE

Woven Gradience Collection

WG200



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m² ± 5%
Pile Height	3.1 mm ± 15% / ~ 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL _w)	27 dB (EN ISO 10140-3)
Sound Absorption	α _w 0.20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS-01 FEC7DD
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	3.57 kg CO ₂ eq./m²




WG200 - EMERALD, CHARCOAL & INK
WG200 - INK, ROSE, SAGE & SUNRISE
WG200 - INK/EMERALD & CHARCOAL/INK
INSTALLED - DESIGN BY TILE



Yuton Collection

Yuton 104

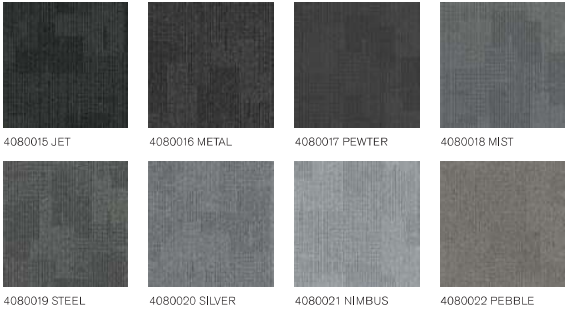


Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	541 g/m ² ± 5%
Pile Height	2,9 mm ± 15% / ~ 10%
Total Thickness	6,0 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 7FDFD35
Packaging	4 m ²
Carbon Footprint (cradle-to-gate)	6,48 kg CO ₂ eq / m ²



YUTON 104 - METAL
INSTALLED - NON DIRECTIONAL

Yuton Collection

Yuton 105

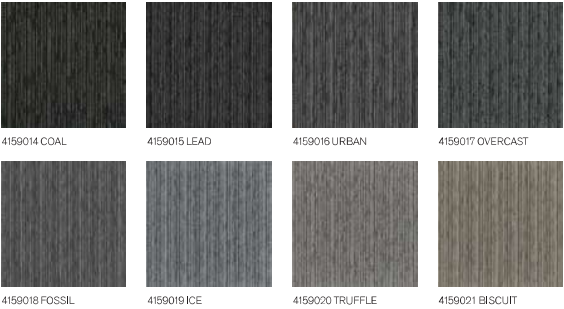

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	551 g/m² ± 5%
Pile Height	3,2 mm ± 15% / ~ 10%
Total Thickness	5,9 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	24 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,15 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - OF35F8E3
Packaging	4 m²
Carbon Footprint (cradle-to-gate)	6,58 kg CO ₂ eq /m²



YUTON 105 - URBAN
INSTALLED - ASHUR

Yuton Collection

Yuton 106



Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	561 g/m² ± 5%
Pile Height	2,9 mm ± 15% / ~ 10%
Total Thickness	6,4 mm ± 0,5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2,4 (EN 985)
Impact Sound Insulation (ΔL _w)	23 dB (EN ISO 10140-3)
Sound Absorption	α _w 0,20 (EN ISO 11854)
Indoor Air Quality	GUT PRODIS - 2EEC8F8E
Packaging	4m²
Carbon Footprint (cradle-to-gate)	6,67 kg CO ₂ eq /m²



YUTON 106 - IRON
UNWALLED - NON DIRECTIONAL
LEVEL SET TEXTURED WOODGRAINS - SILVER DUBE
INSTALLED - ASHILAR

