

flotex®
THE HIGH-TECH TEXTILE



UP TO 21 dB
IMPACT SOUND
REDUCTION AND 0.10 α_w
IN ROOM SOUND RATING



EXCELLENT
SLIP RESISTANCE
WHEN WET



WASHABLE and
WATERPROOF



MECHANICAL
WET CLEANING
POSSIBLE




THE ONLY TEXTILE
FLOORING WITH
APPROVAL FROM THE
BRITISH ALLERGY
FOUNDATION



FLOTEX

Up to 80 million straight nylon fibres per m² are electrostatically flocked into the backing. The unique structure ensures dirt and allergens can be released when vacuumed.



30% MORE SOIL
RELEASED THAN CARPET



CARPET

Loop and cut pile carpets have a structure that makes removing allergens and fine dust very difficult in comparison to the smooth, straight and almost upright fibres in Flotex flocked flooring.

STRAIGHT
NYLON 6.6
FIBRES (FLOCK)
capture fine dust and
allergens which are
easily released when
vacuumed

PHTHALATE
FREE


LOW ROLL
RESISTANCE

Up to
80 million
fibres per m²
ensures high
durability

up to ≤ 21,8%
(sheet) ≤ 59%
(tiles and planks)
recycled
content

Vacuuming removes
almost DOUBLE the
ALLERGENS compared to
conventional carpet

Safe and
ultra low
emissions

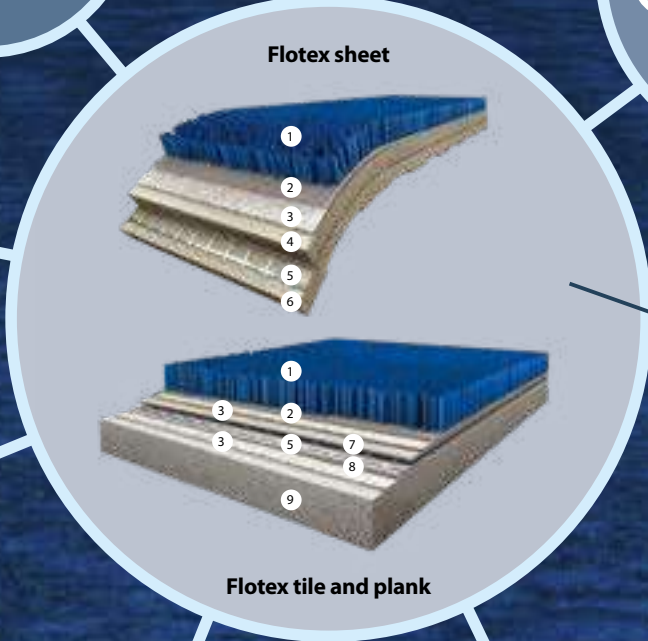

- 1 Nylon 6.6 pile
- 2 Flock adhesive
- 3 Nonwoven fibreglass
- 4 Closed cell PVC foam
- 5 Fibreglass net reinforcement
- 6 Closed cell PVC foam
- 7 Compact PVC layer
- 8 Compact PVC layer
- 9 Recycled PVC Backing



FLOTEX SHEET COLLECTION AT A GLANCE

flotex® colour

metro | penang | calgary

Three versatile and fresh designs make up the Flotex Colour collection: Metro, Calgary and Penang. Together they offer a range of 61 unique colourways. All are available in sheet and tile.



280

flotex® advance

latitude | code

The Flotex Advance collection features 2 designs, Latitude and Code, both designed specifically to create a contemporary feel within any space. These designs offer a versatile blend of aesthetics and functionality. All Flotex advance items are available as sheet and tile. The Flotex advance sheet items have a Flotex Next backing which means it can be installed as loose lay.



286

flotex® naturals

This special range of digitally printed Flotex delivers the appearance of a real wood floor but with improved acoustics and reduced maintenance costs. Available in sheet.



290




metro **s246005** | nimbus

penang **s482005** | smoke

calgary **s290019** | carbon



Description	Flocked flooring	
Dimensions	Sheet: Roll width 2m	
	Roll length ≤ 30m	
Total thickness	Tile: 50cm x 50cm (3m ² per box)	
	Sheet: 4.3mm	
Slip resistance	Tile: 5.0mm	
	BS 7976-2 (UK SRG pendulum) Dry - low slip risk	
Application	EN-ISO 10874	Class 33 heavy
Impact sound reduction	Sheet: ΔL _w ≥ 21 dB	
	Tile: ΔL _w ≥ 19 dB	
CE	EN 14041	
Reaction to fire	EN 13501-1	B _f -s1
Slip resistance	EN 13893	μ ≥ 0.30
Body voltage	ISO 6356	≤ 2.0 kV




Usage classification


- Superior appearance rating
- Good appearance rating
- Moderate appearance rating

s = Sheet
t = Tile

Full technical specifications are available at www.forbo-flooring.com
Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.

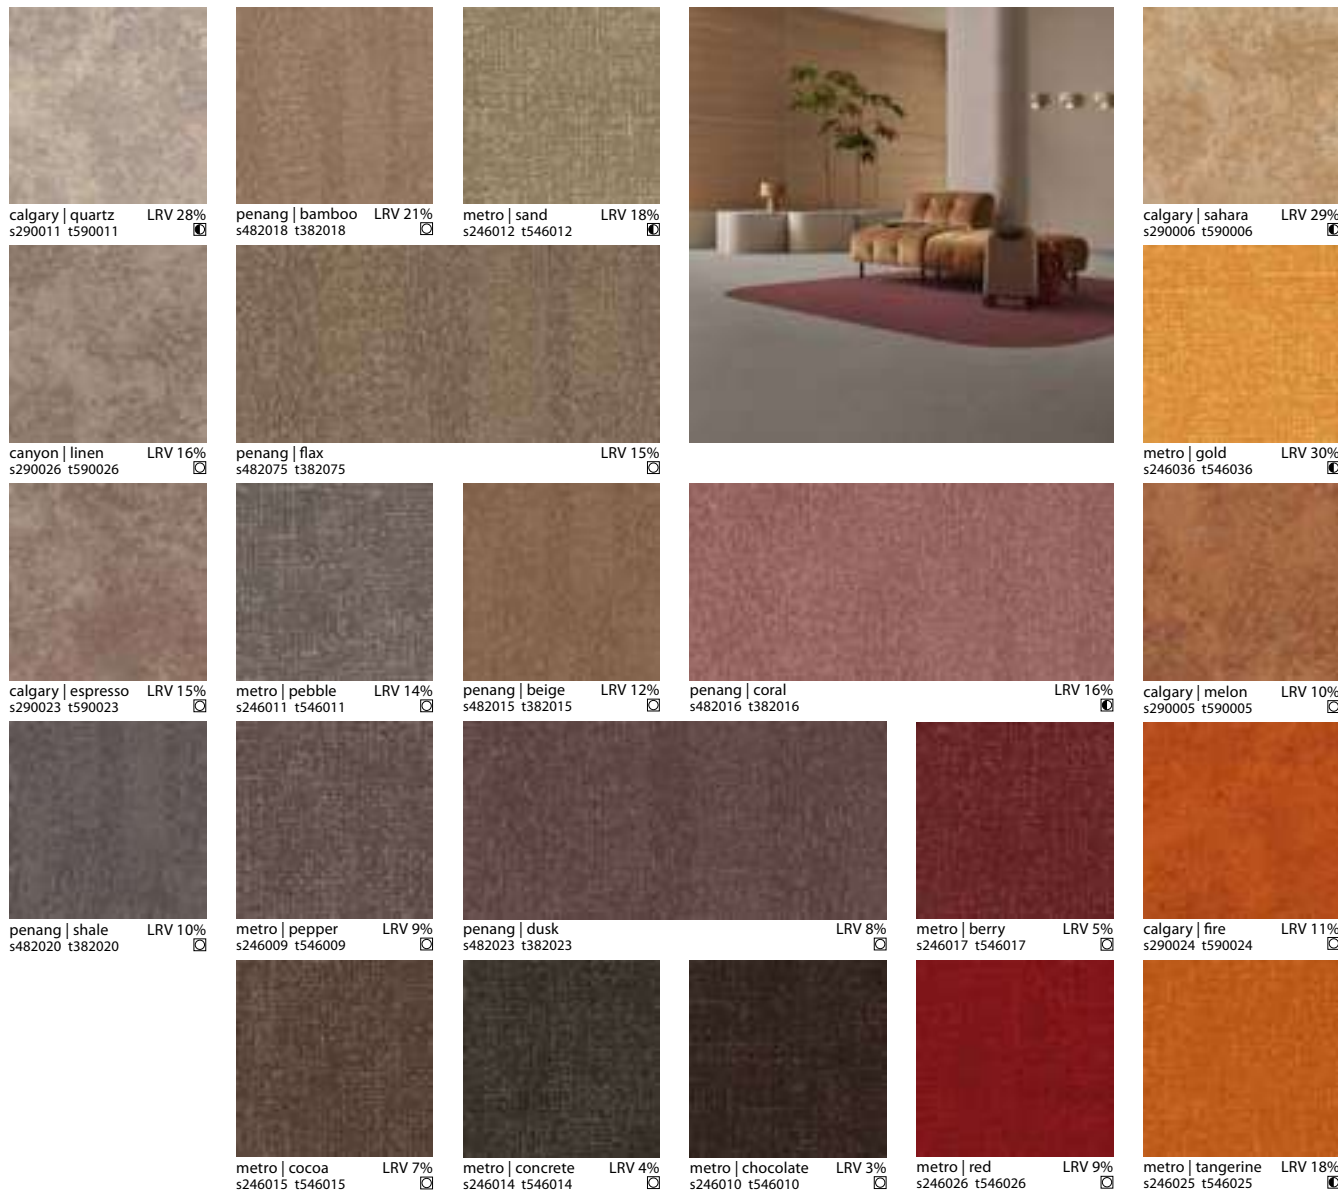

Description	Flocked flooring
Dimensions	Sheet: Roll width 2m Roll length ≤ 30m Tile: 50cm x 50cm (3m² per box)
Total thickness	ISO 1765 Sheet: 4.3mm Tile: 5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum) Dry - low slip risk Wet - low slip risk
Application	EN-ISO 10874 Class 33 heavy
Impact sound reduction	EN ISO 717-2 Sheet: $\Delta L_{w1} \geq 21$ dB Tile: $\Delta L_{w1} \geq 19$ dB
CE	EN 14041
Reaction to fire	EN 13501-1 B _{fl} -s1
Slip resistance	EN 13893 $\mu \geq 0.30$
Body voltage	ISO 6356 ≤ 2.0 kV



Full technical specifications are available at www.forbo-flooring.com
Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.



Usage classification
☐ Superior appearance rating
☑ Good appearance rating
● Moderate appearance rating

s = Sheet
t = Tile


FLOTEX NEXT LOOSE LAY SOLUTION



Fast flooring solution

The Flotex Next adhesive free flocked flooring combines the incredible performance of Flotex with the benefits of a loose lay installed floor. Not having to use installation adhesive makes Flotex Next very suitable for busy areas: installation time is reduced and there is minimal disruption or lingering adhesive odours. Flotex Next can be walked on immediately after installation.

With Flotex Next only a very short time is needed to prepare the substrate and the installation itself requires a limited number of operations. Only minimal preparation of the subfloor is required and the application of the adhesive and the drying time of the glue do not have to be taken into account. A new floor can be installed with minimal downtime or even without closing the premises.

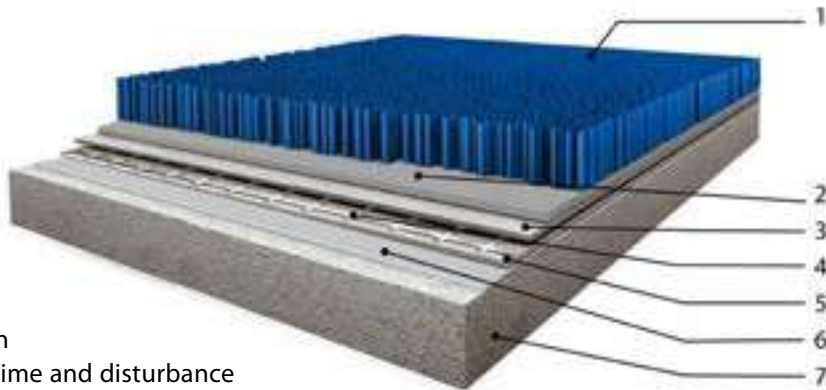

Product construction

- adhesive free flocked flooring solution
- rapid installation with minimal downtime and disturbance
- can be walked on immediately after installation
- long term benefit of quick removal, replacement and recycling or reuse possibilities

1: nylon 6.6 pile | 2: pile adhesive | 3: fibreglass #1 | 4: fibreglass scrim | 5: compact layer | 6: fibreglass #2 | 7: closed cell PVC backing

Flotex Next - how to order


The Flotex Next construction is available for our Flotex Naturals, Hospitality & Leisure and Created by sheet collections and for all Flotex sheet items in the Vision library.




Each Flotex item has a colourway number. Add the code NX as a suffix behind the colourway number to specify your required Next construction. The minimum order quantity is 50m².

The Flotex Advance sheet items come standard with Flotex next backing so no minimum order quantity and no addition of a suffix. The Flotex next backing can also be glued if required.



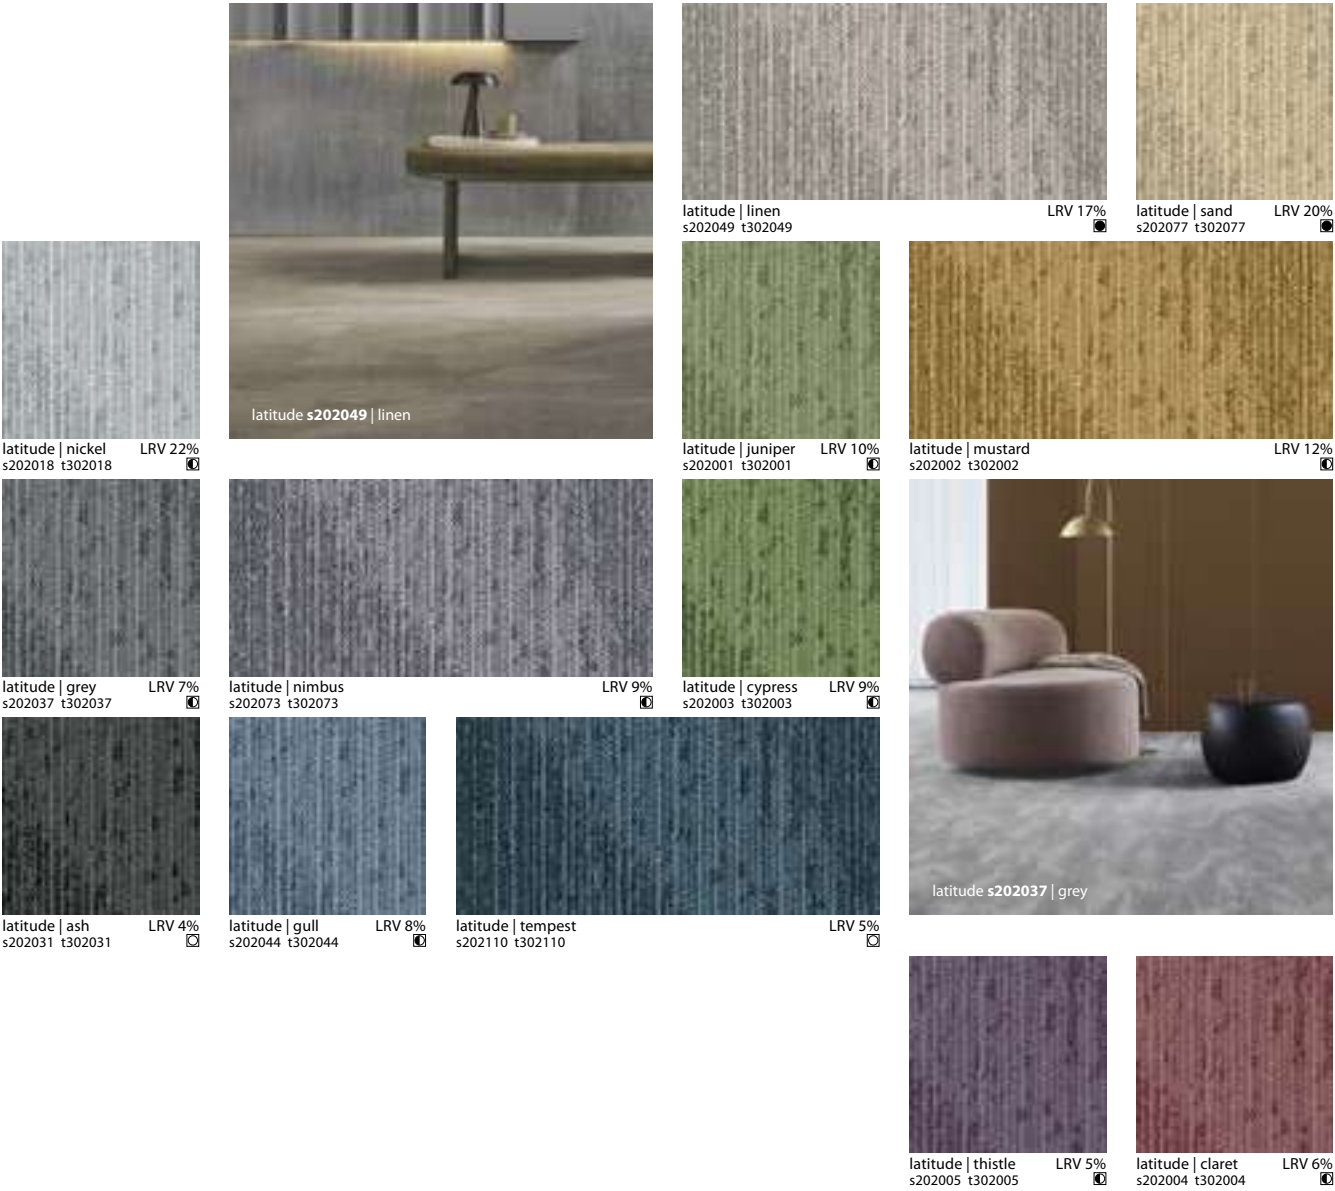

Description	Flocked flooring	
Dimensions	Sheet: Roll width 2m	
	Roll length ≤ 25m	
Total thickness	Sheet: 3.9mm	
	Tile: 5.0mm	
Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk
Application	EN-ISO 10874	Class 33 heavy
Impact sound reduction	EN ISO 717-2	Sheet: ΔLw ≥ 20 dB Tile: ΔLw ≥ 19 dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B _{fl} -s1
Slip resistance	EN 13893	μ ≥ 0.30
Body voltage	ISO 6356	≤ 2.0 kV



Full technical specifications are available at www.forbo-flooring.com
Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.



- Usage classification**
- ☐ Superior appearance rating
 - ◐ Good appearance rating
 - Moderate appearance rating

s = Sheet
t = Tile


Flotex Advance sheet with innovative Next backing for loose-lay or glued installation.
Thanks to its Next backing, the Flotex Advance sheet can be effortlessly installed without the need for adhesive, making it a time and cost-saving solution for both new construction and renovation projects.

Flotex Advance sheet is also suitable for glued installation.



RECOLOURATION OPTIONS

We already created some additional colour possibilities for you to choose from for the Flotex Code design in sheet, so you can order a sample.

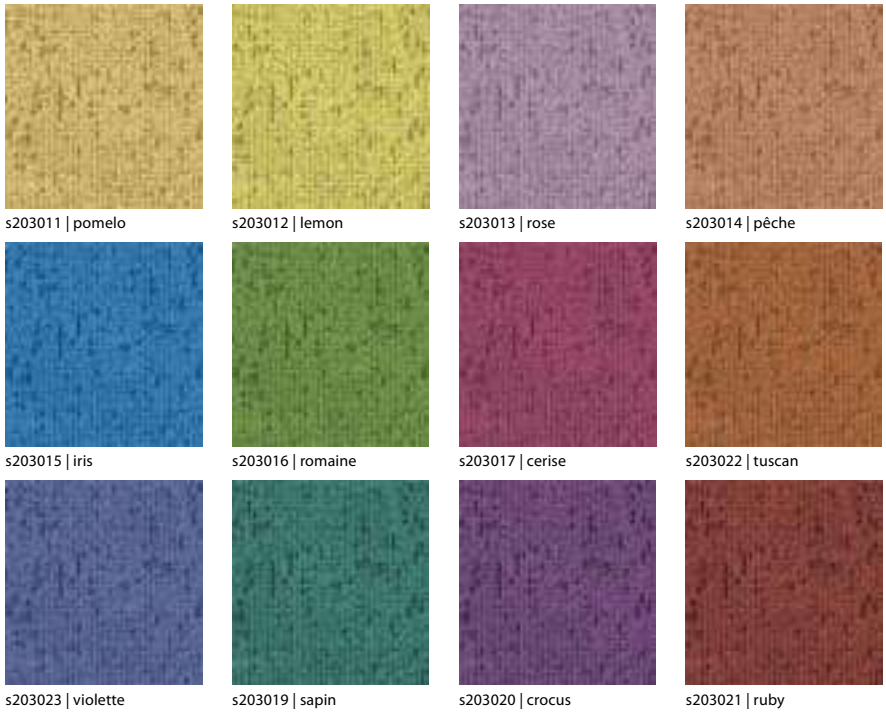

Flotex offers the flexibility to recolour Flotex Code and Flotex Latitude with your own colour, in both sheet and tiles.

1. Contact your local customer service to check minimum order quantity
2. Choose your colour reference in Pantone, NCS, RAL or material samples
3. You receive a sample for approval
4. After your approval your custom floor will be produced.

IF YOU WANT A CUSTOM
COLOUR FOR YOUR
FLOORING, FLOTEX OFFERS
FLEXIBILITY IN MEETING
THOSE NEEDS



Code s203084 | mineral, s203018 | nickel



Our renewed Flotex Vision Naturals range enables you to create the aesthetic of a real wood or ceramics floor, whilst maintaining the warmth, acoustics and comfort that a carpet offers.

Our state of the art digital printing technique achieves high quality, true to life visuals of wood and ceramic textures.



010076 | limed wood 010078 | shaded oak 010058 | titanium oak



010073 | heritage plank 010074 | shadow plank 010077 | smoked walnut



010038 | white oak 010034 | pear wood 010042 | steamed beech




Usage classification
☐ Superior appearance rating ◐ Good appearance rating ● Moderate appearance rating

Full technical specifications are available at www.forbo-flooring.com
Please note: Digital representations may vary from the actual product.
Please order a sample to see the full effect.



010075 | warm oak 010039 | European white wood 010036 | American oak

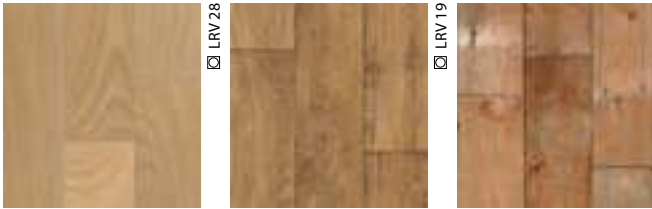

010041 | smoked beech 010035 | distressed oak 010002 | reclaimed pine




010056 | stained pine 010020 | dark elm 010003 | mixed wood antique



010012 | light elm 010057 | cedar 010013 | mixed wood rose



010040 | antique pine 010033 | English oak 010037 | blackened oak



010079 | hungarian point grey



010071 | summer chevron



010080 | hungarian point



010072 | autumn chevron *



010021 | reclaimed oak



010014 | teak



010031 | anthracite wood



010018 | linear walnut



010055 | chestnut



010032 | oak herringbone




010017 | cork amber



010046 | China black



010051 | lava stone




010052 | welsh slate



010008 | dark slate




010023 | grey slate



010049 | charcoal glaze



010044 | quarry tile



010045 | farmhouse tile



010029 | limestone slate



010048 | Roman spa



010050 | salt glaze



010047 | limestone pavement



010043 | cornerstone

Description	Flocked flooring	
Dimensions	Roll width 2m	
	Roll length ≤ 30m	
Total thickness	ISO 1765	4.3mm
Slip resistance	Pendulum test	Wet – low slip risk
Collection size	48	
Application	EN 1307	Class 33 heavy
Impact sound reduction	EN ISO 717-2	ΔL _w = 20 dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B _{f1} -s1
Slip resistance	EN 13893	DS: ≥0.30
Body voltage	EN ISO 10965	< 2 kV

flotex® planks

ombré

Strongly textile, subtly textured and shading from dark to light. The effect is one of deliberate contrasts, as the elements of the design mix with the format of plank. Ombré colours can easily be combined to make beautiful designs or used with their co-ordinating Montage colourways.



montage

The build-up of textures, with layer upon layer of blending and mixing structures, evolve into a complex pattern that gives Montage an elegant and contemporary feel. It can be used widely on its own or combined with Ombré to create inserts or zones.



frameweave

Inspired by rich woven fabric and combined with a graphical layout, the result creates both depth and movement as shapes form within the otherwise subtle design. The large choice of colours makes Frameweave a very versatile choice for designing stunning installations.



converge

Areas of pattern meet, joining at angles, creating different facets which contrast in shade or colour, forming abstract shapes and forms at random. Via their shared elements, all colours co-ordinate making this the perfect design for large areas requiring differentiation.



refract

A contrasting pattern made of textures formed by light, reflected and refracted across buildings. It has depth, movement and energy. It has been designed to ensure a perfectly random appearance, creating a stunning individual floor without the need for planning.



Flotex fulfils our ambition to contribute to creating better indoor environments by committing to the health and well-being of all individuals living and working in indoor spaces. Flotex achieves this through excellent hygiene and sound absorbing qualities, phthalate-free products, the certification by Allergy UK for the positive effects it has on allergy sufferers, and a wide range of stimulating designs and sympathetic colours which can create inspiring interiors.



FLOTEX PLANKS COLLECTION AT A GLANCE

triad

Based on the idea of a group of three lines, these geometric forms evolve becoming abstract and random, always familiar but never the same. Highly graphic and sophisticated in its design, the colourways can be combined or used individually, with or without co-ordinating accents.



box-cross

Subtly changing from a box to a cross, the motif seems to fade in and out creating light and shade that bring contrast and interest. The effect is both stylish and sophisticated, forming a unique visual look that works in both large and small areas.



seagrass

Organic but linear, naturally inspired and beautifully textured. A classic pattern with colours that can easily be mixed together in a variety of installation methods. Seagrass is versatile and understated, making it suitable for any environment.



concrete

Highlights of colour bring new life to this classic, offering a refreshing change to the normal by mixing fun with tradition. Use them on their own, together or with the classic Concrete colourways to design stunning individual floors.



marble

Classic and chic with an element of fun. To be mixed together or used individually to bring character or just challenge the senses. Marble brings something new, visually familiar yet texturally different, it aims to challenge perceptions and push boundaries.



wood

Inspired by natural wood, this familiar aesthetic takes on a new versatile guise offering a traditional look in an untraditional format. These wood patterns are beautifully detailed, look good individually and can be combined to create stunning flooring designs.



flotex® planks

ombré

Strongly textile, subtly textured and shading from dark to light. The effect is one of deliberate contrasts, as the elements of the design mix with the format of plank. Ombré colours can easily be combined to make beautiful designs or used with their co-ordinating Montage colourways.



Plank size
100 x 25 cm



Ombré 149004 | moraine



149007 | arctic LRV 11



149004 | moraine LRV 14



149006 | glacier LRV 11



149003 | tropic LRV 11



149008 | tundra LRV 13



149001 | boreal LRV 15



149002 | horizon LRV 10



149005 | estuary LRV 13

Description	Flocked flooring
Dimensions	100cm x 25cm (2.5m² per box)
Total thickness	ISO 1765 5.0mm
Slip resistance	BS 7976-2 (UK Dry - low slip risk SRG pendulum) Wet - low slip risk
Collection size	94
Application	EN-ISO 10874 Class 33
Impact sound reduction	EN ISO 717-2 $\Delta L_w = 19$ dB
CE	EN 14041
Reaction to fire	EN 13501-1 B _f -s1, L, CS
Slip resistance	EN 13893 $\mu \geq 0.30$
Body voltage	ISO 6356 ≤ 2.0 kV



Half-drop installation 1



Half-drop installation 2



Herringbone installation 1



Herringbone installation 2



Double herringbone installation 1



Double herringbone installation 2



Weave installation 1



Weave installation 2

flotex® planks

montage

The build-up of textures, with layer upon layer of blending and mixing structures, evolve into a complex pattern that gives Montage an elegant and contemporary feel. It can be used widely on its own or combined with Ombré to create inserts or zones.



Plank size
100 x 25 cm



Montage 147008 | tudra + Ombré 149008 | tudra



147007 | arctic LRV 8%



147004 | moraine LRV 8%



147006 | glacier LRV 7%



147003 | tropic LRV 7%

Description	Flocked flooring
Dimensions	100cm x 25cm (2.5m² per box)
Total thickness	ISO 1765 5.0mm
Slip resistance	BS 7976-2 (UK Dry - low slip risk SRG pendulum) Wet - low slip risk
Collection size	94
Application	EN-ISO 10874 Class 33
Impact sound reduction	EN ISO 717-2 $\Delta L_w = 19$ dB
CE	EN 14041
Reaction to fire	EN 13501-1 B _f -s1, L, CS
Slip resistance	EN 13893 $\mu \geq 0.30$
Body voltage	ISO 6356 ≤ 2.0 kV



147008 | tudra LRV 8%



147001 | boreal LRV 9%



147002 | horizon LRV 6%



147005 | estuary LRV 8%



Half-drop installation 1



Half-drop installation 2



Herringbone installation 1



Herringbone installation 2



Double herringbone installation 1



Double herringbone installation 2



Weave installation 1



Weave installation 2

Full technical specifications are available at www.forbo-flooring.com

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.

flotex® planks
frameweave

Inspired by rich woven fabric and combined with a graphical layout, the result creates both depth and movement as shapes form within the otherwise subtle design. The large choice of colours makes Frameweave a very versatile choice for designing stunning installations.



142001 | pave LRV 10

142003 | sepia LRV 12

142006 | capri LRV 7

142016 | pine LRV 7

142007 | ember LRV 9

142009 | lignite LRV 6

142015 | violet LRV 6

142014 | marine LRV 5

142008 | pesto LRV 9

142004 | citrine LRV 14

142011 | flame LRV 5

142002 | ink LRV 7

142005 | anchor LRV 6

142010 | harbour LRV 6

142012 | verdant LRV 31

142013 | graphene LRV 4

Half-drop installation 1


Half-drop installation 2

Herringbone installation 1

Herringbone installation 2

Weave installation 1

Weave installation 2



Description	Flocked flooring
Dimensions	100cm x 25cm (2.5m² per box)
Total thickness	ISO 1765 5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum) Dry - low slip risk Wet - low slip risk
Collection size	94
Application	EN-ISO 10874 Class 33
Impact sound reduction	EN ISO 717-2 $\Delta L_w = 19$ dB
CE	EN 14041
Reaction to fire	EN 13501-1 B _{fl} -s1, L, CS
Slip resistance	EN 13893 $\mu \geq 0.30$
Body voltage	ISO 6356 ≤ 2.0 kV


Full technical specifications are available at www.forbo-flooring.com
Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.

- Usage classification**
- ☒ Superior appearance rating
 - ☒ Good appearance rating
 - ☒ Moderate appearance rating

flotex® planks
converge

Areas of pattern meet, joining at angles, creating different facets which contrast in shade or colour, forming abstract shapes and forms at random. Via their shared elements, all colours co-ordinate making this the perfect design for large areas requiring differentiation.

Description	Flocked flooring
Dimensions	100cm x 25cm (2.5m² per box)
Total thickness	ISO 1765 5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum) Dry - low slip risk Wet - low slip risk
Collection size	94
Application	EN-ISO 10874 Class 33
Impact sound reduction	EN ISO 717-2 $\Delta L_w = 19$ dB
CE	EN 14041
Reaction to fire	EN 13501-1 B _{fl} -s1, L, CS
Slip resistance	EN 13893 $\mu \geq 0.30$
Body voltage	ISO 6356 ≤ 2.0 kV

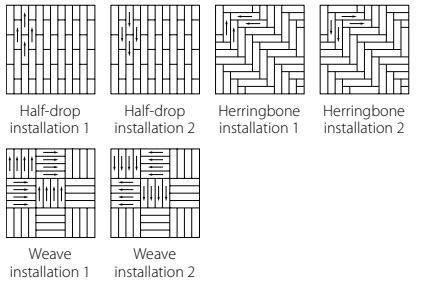

141001 | prism LRV 5

141007 | pinnacle LRV 5


141006 | arc LRV 8

141002 | aurora LRV 5

141003 | zenith LRV 5

141005 | radiant LRV 6

141004 | sunbeam LRV 6



Full technical specifications are available at www.forbo-flooring.com
Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.

- Usage classification**
- ☒ Superior appearance rating
 - ☒ Good appearance rating
 - ☒ Moderate appearance rating

flotex® planks

refract

A contrasting pattern made of textures formed by light, reflected and refracted across buildings. It has depth, movement and energy. It has been designed to ensure a perfectly random appearance, creating a stunning individual floor without the need for planning.



137004 | quartz LRV 5



137001 | obsidian LRV 6



137005 | topaz LRV 5



Description	Flocked flooring	
Dimensions	100cm x 25cm (2.5m² per box)	
Total thickness	ISO 1765	5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk
Collection size	94	
Application	EN-ISO 10874	Class 33
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B _f -s1, L, CS
Slip resistance	EN 13893	$\mu \geq 0.30$
Body voltage	ISO 6356	≤ 2.0 kV



Half-drop installation 1



Half-drop installation 2



Herringbone installation 1



Herringbone installation 2




Weave installation 1



Weave installation 2



137002 | firoza LRV 6



137006 | malachite LRV 8



137003 | sapphire LRV 5

Usage classification

- ☐ Superior appearance rating
- ◐ Good appearance rating
- Moderate appearance rating



Plank size
100 x 25 cm

flotex® planks

triad

Based on the idea of a group of three lines, these geometric forms evolve becoming abstract and random, always familiar but never the same. Highly graphic and sophisticated in its design, the colourways can be combined or used individually, with or without co-ordinating accents.



131005 | platinum LRV 9



131015 | stone LRV 18



131007 | steel LRV 9



131010 | taupe LRV 11



131008 | shadow LRV 6



131017 | anthracite LRV 5



121001 | embossed zinc LRV 8




131012 | blue line LRV 8



131017 | anthracite LRV 5




131006 | silver LRV 8



131012 | blue line LRV 8




131002 | blue LRV 7



131003 | green LRV 10



131003 | green LRV 10



131014 | amber line LRV 8




131011 | red line LRV 9



131004 | amber LRV 12



131001 | red LRV 8



131002 | blue LRV 7



131003 | green LRV 10



131003 | green LRV 10



131003 | green LRV 10

Description	Flocked flooring	
Dimensions	100cm x 25cm (2.5m² per box)	
Total thickness	ISO 1765	5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk
Collection size	94	
Application	EN-ISO 10874	Class 33
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B _f -s1, L, CS
Slip resistance	EN 13893	$\mu \geq 0.30$
Body voltage	ISO 6356	≤ 2.0 kV

Plank size
100 x 25 cm




flotex® planks


box-cross

Subtly changing from a box to a cross, the motif seems to fade in and out creating light and shade that bring contrast and interest. The effect is both stylish and sophisticated, forming a unique visual look that works in both large and small areas.

Description	Flocked flooring	
Dimensions	100cm x 25cm (2.5m² per box)	
Total thickness	ISO 1765	5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk
Collection size	94	
Application	EN-ISO 10874	Class 33
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B _{fl} -s1, L, CS
Slip resistance	EN 13893	$\mu \geq 0.30$
Body voltage	ISO 6356	≤ 2.0 kV

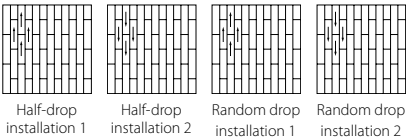

- Usage classification**
- Superior appearance rating
 - Good appearance rating
 - Moderate appearance rating



133002 | pearl LRV 25



133007 | granite LRV 7



133011 | anthracite LRV 4



133005 | linen LRV 20



133004 | biscuit LRV 20



133010 | seal LRV 7



Box-cross 133011 | anthracite + 133002 | pearl + 133007 | granite



133009 | petrol LRV 7



133008 | blueberry LRV 4



133016 | crimson LRV 6

Plank size
100 x 25 cm

flotex® planks


seagrass

Organic but linear, naturally inspired and beautifully textured. A classic pattern with colours that can easily be mixed together in a variety of installation methods. Seagrass is versatile and understated, making it suitable for any environment.



Seagrass 111001 | pearl + 111002 | cement + 111003 | almond + 111004 | charcoal + 111006 | liquorice

Description	Flocked flooring	
Dimensions	100cm x 25cm (2.5m² per box)	
Total thickness	ISO 1765	5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk
Collection size	94	
Application	EN-ISO 10874	Class 33
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B _{fl} -s1, L, CS
Slip resistance	EN 13893	$\mu \geq 0.30$
Body voltage	ISO 6356	≤ 2.0 kV

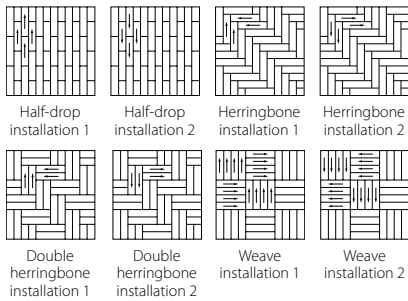

Plank size
100 x 25 cm



111001 | pearl LRV 26



111002 | cement LRV 13



111004 | charcoal LRV 9



111003 | almond LRV 19



111005 | walnut LRV 8



111006 | liquorice LRV 5

- Usage classification**
- Superior appearance rating
 - Good appearance rating
 - Moderate appearance rating

Full technical specifications are available at www.forbo-flooring.com

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.

flotex® planks
concrete

Highlights of colour bring new life to this classic, offering a refreshing change to the normal by mixing fun with tradition. Use them on their own, together or with the classic Concrete colourways to design stunning individual floors.



139001 | cloud LRV 18



139003 | smoke LRV 16



139002 | thunder LRV 11



139004 | storm LRV 11



Concrete 139001 Cloud | 139003 + Smoke | 139002 Thunder

Plank size
100 x 25 cm

Description	Flocked flooring	
Dimensions	100cm x 25cm (2.5m² per box)	
Total thickness	ISO 1765	5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk
Collection size	94	
Application	EN-ISO 10874	Class 33
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B _{fl} -s1, L, CS
Slip resistance	EN 13893	$\mu \geq 0.30$
Body voltage	ISO 6356	≤ 2.0 kV



Half-drop installation 1



Half-drop installation 2



Herringbone installation 1



Herringbone installation 2



Double herringbone installation 1



Double herringbone installation 2



Weave installation 1



Weave installation 2



139013 | spa LRV 15



139011 | aqua LRV 16



139014 | lichen LRV 15



139012 | sunset LRV 15

Full technical specifications are available at www.forbo-flooring.com

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.


flotex® planks
marble

Classic and chic with an element of fun. To be mixed together or used individually to bring character or just challenge the senses. Marble brings something new, visually familiar yet texturally different, it aims to challenge perceptions and push boundaries.


Plank size
100 x 25 cm



marble 143004 | diano + 143003 | pietra

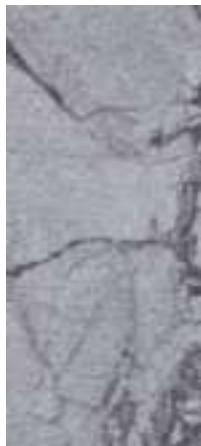

143001 | carrara LRV 26



143004 | diano LRV 26



143002 | marquina LRV 5



143003 | pietra LRV 5

Description	Flocked flooring	
Dimensions	100cm x 25cm (2.5m² per box)	
Total thickness	ISO 1765	5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk
Collection size	94	
Application	EN-ISO 10874	Class 33
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B _{fl} -s1, L, CS
Slip resistance	EN 13893	$\mu \geq 0.30$
Body voltage	ISO 6356	≤ 2.0 kV



Half-drop installation 1



Half-drop installation 2



Herringbone installation 1



Herringbone installation 2



Double herringbone installation 1



Double herringbone installation 2



Weave installation 1



Weave installation 2

Full technical specifications are available at www.forbo-flooring.com

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.

flotex® planks

wood

Inspired by natural wood, this familiar aesthetic takes on a new versatile guise offering a traditional look in an untraditional format. These wood patterns are beautifully detailed, look good individually and can be combined to create stunning flooring designs.

Description	Flocked flooring	
Dimensions	100cm x 25cm (2.5m² per box)	
Total thickness	ISO 1765	5.0mm
Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk
Collection size	94	
Application	EN-ISO 10874	Class 33
Impact sound reduction	EN ISO 717-2	$\Delta L_w = 19$ dB
CE	EN 14041	
Reaction to fire	EN 13501-1	B ₁ -s1, L, CS
Slip resistance	EN 13893	$\mu \geq 0.30$
Body voltage	ISO 6356	≤ 2.0 kV



151003 | silver wood LRV 31



151001 | black wood LRV 8



151002 | grey wood LRV 13



Half-drop installation 1



Half-drop installation 2



Herringbone installation 1



Herringbone installation 2



Double herringbone installation 1



Double herringbone installation 2



Weave installation 1



Weave installation 2



151004 | american wood LRV 15



151007 | english wood LRV 13



151006 | antique wood LRV 9



151008 | rustic wood LRV 9



151005 | red wood LRV 9

Usage classification

- ☒ Superior appearance rating
- ☒ Good appearance rating
- ☒ Moderate appearance rating

Full technical specifications are available at www.forbo-flooring.com
Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect.



Wood 151001 | black wood + 151002 | grey wood + 151004 | american wood + 151006 | antique wood



Flotex Planks Wood 151007 | English wood